




# OIL ANALYSIS REPORT

Sample Rating Trend

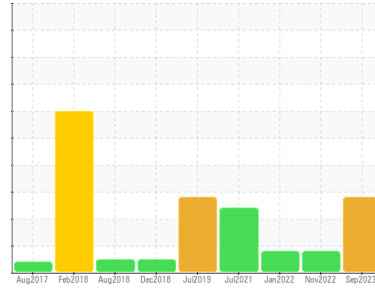

FUEL



Machine Id  
**4780**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0090588</b>	GFL0064110	GFL0041472
Sample Date	Client Info	<b>08 Sep 2023</b>	20 Nov 2022	17 Jan 2022
Machine Age	hrs	<b>19137</b>	18460	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed
Sample Status		<b>SEVERE</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >100	<b>21</b>	24	45
Chromium	ppm	ASTM D5185(m) >20	<b>1</b>	1	3
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >20	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m) >40	<b>1</b>	<1	2
Copper	ppm	ASTM D5185(m) >330	<b>2</b>	3	40
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	2
Antimony	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 2	<b>1</b>	2	2
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>48</b>	53	53
Manganese	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	<b>780</b>	860	882
Calcium	ppm	ASTM D5185(m) 1050	<b>829</b>	949	959
Phosphorus	ppm	ASTM D5185(m) 995	<b>856</b>	973	891
Zinc	ppm	ASTM D5185(m) 1180	<b>954</b>	1056	1100
Sulfur	ppm	ASTM D5185(m) 2600	<b>2025</b>	2253	2047
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	<b>5</b>	7	11
Sodium	ppm	ASTM D5185(m)	<b>6</b>	4	13
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	1	5
Fuel	%	ASTM D7593* >5	<b>13.9</b>	7.1	6.7

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >3	<b>0.4</b>	0.4	0.7
Nitration	Abs/cm	ASTM D7624* >20	<b>10.3</b>	10.9	12.7
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>24.3</b>	24.1	26.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>27.6</b>	25.2	28.0











# OIL ANALYSIS REPORT

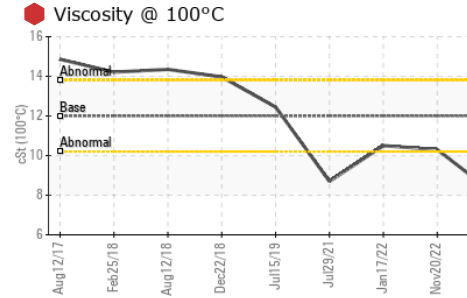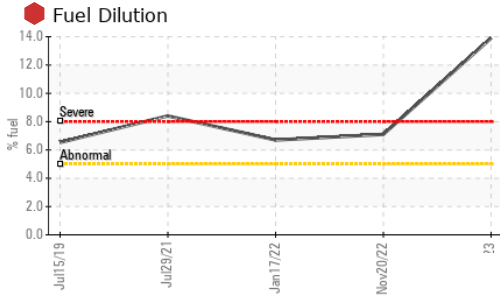

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	8.2	10.3

## GRAPHS

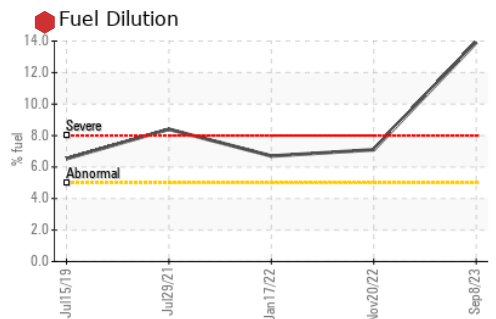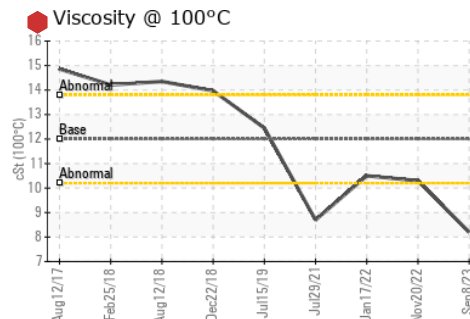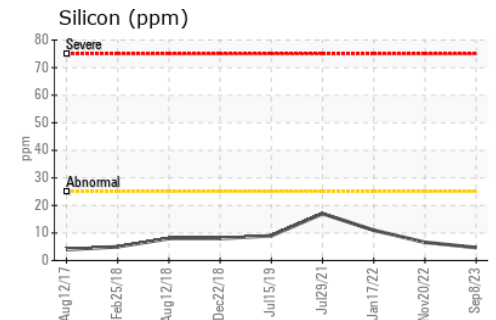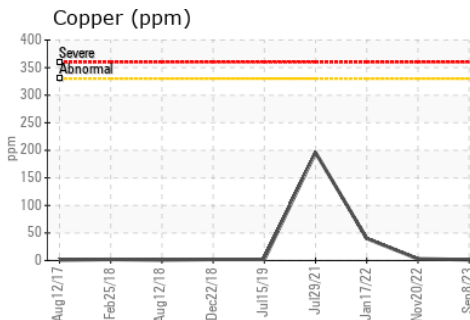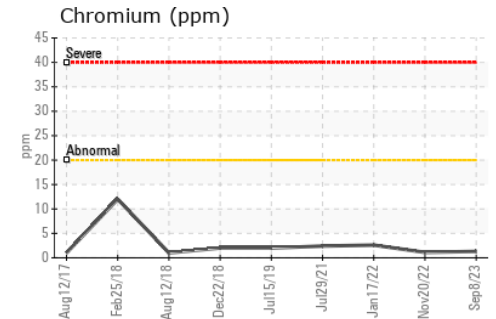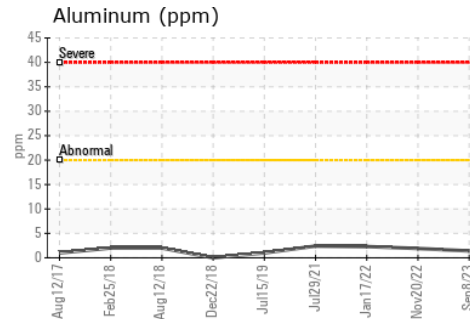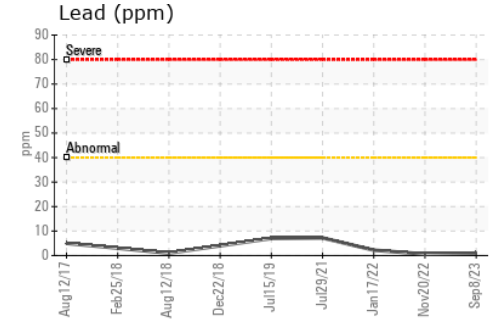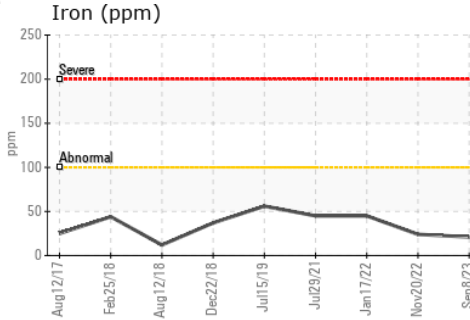

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW  
**Sample No.** : GFL0090588 **Received** : 18 Sep 2023  
**Lab Number** : 02583115 **Diagnosed** : 19 Sep 2023  
**Unique Number** : 5644180 **Diagnostician** : Bill Quesnel  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tim Greig  
 tgreig@gflenv.com

T:  
F: