




# OIL ANALYSIS REPORT

Sample Rating Trend

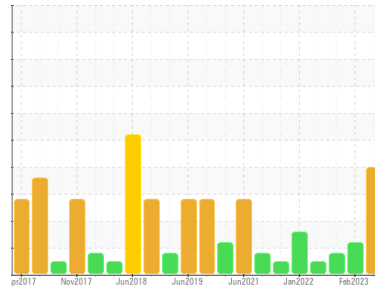

FUEL



Machine Id  
**7824**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- LTR)**

## DIAGNOSIS

### Recommendation

We advise that you check for faulty combustion and a possible overheat condition. We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

A small degree of oil oxidation was indicated. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093916</b>	GFL0064086	GFL0057738
Sample Date	Client Info		<b>18 Sep 2023</b>	16 Feb 2023	06 Sep 2022
Machine Age	hrs	Client Info	<b>22695</b>	21726	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>SEVERE</b>	ABNORMAL	MARGINAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	NEG	0.0

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >110	<b>15</b>	19	22
Chromium	ppm	ASTM D5185(m) >4	<b>1</b>	1	2
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >25	<b>1</b>	2	2
Lead	ppm	ASTM D5185(m) >45	<b>0</b>	2	<1
Copper	ppm	ASTM D5185(m) >85	<b>2</b>	55	2
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	<b>2</b>	3	2
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 50	<b>43</b>	55	55
Manganese	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	<b>692</b>	870	798
Calcium	ppm	ASTM D5185(m) 1050	<b>750</b>	999	901
Phosphorus	ppm	ASTM D5185(m) 995	<b>761</b>	961	903
Zinc	ppm	ASTM D5185(m) 1180	<b>858</b>	1083	992
Sulfur	ppm	ASTM D5185(m) 2600	<b>1875</b>	2205	2161
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	<b>4</b>	5	5
Sodium	ppm	ASTM D5185(m)	<b>6</b>	32	148
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	1	10
Fuel	%	ASTM D7593* >5	<b>17.4</b>	6.2	2.2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.6</b>	0.7	1
Nitration	Abs/cm	ASTM D7624* >20	<b>10.3</b>	10.3	11.1
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>25.9</b>	23.0	26.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>30.7</b>	18.7	25.5











# OIL ANALYSIS REPORT

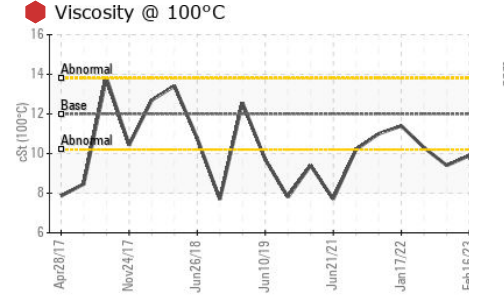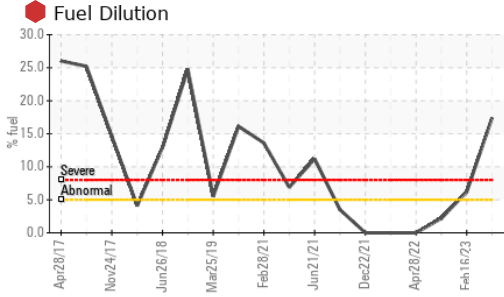

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	7.4	9.9	9.4

## GRAPHS

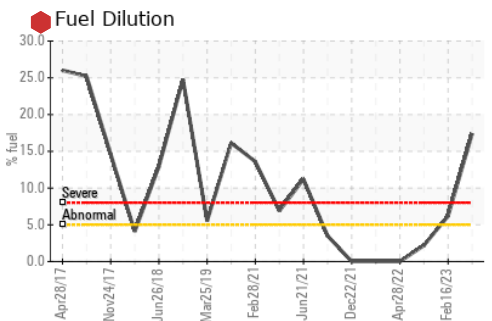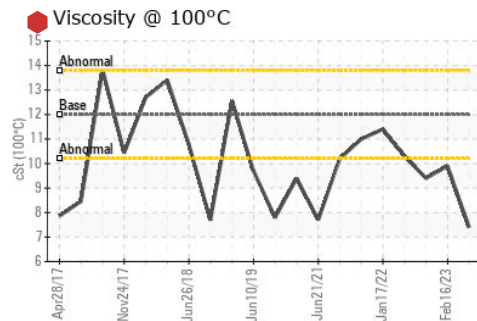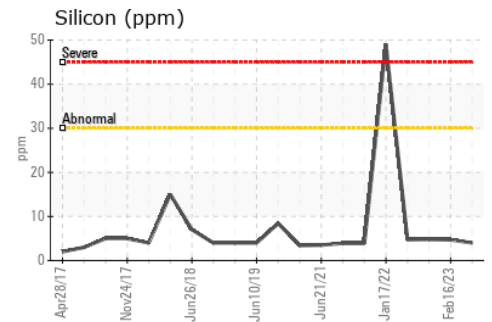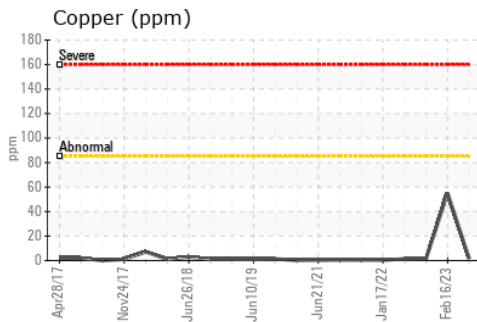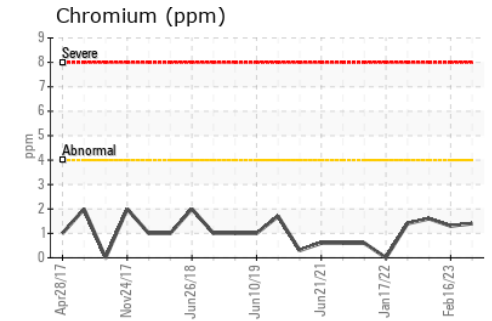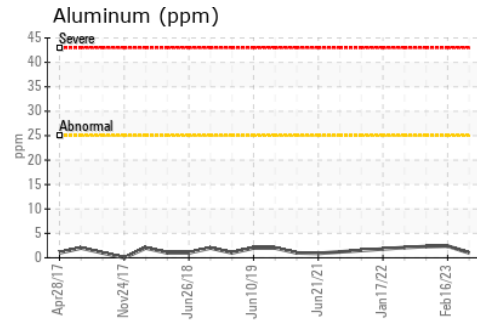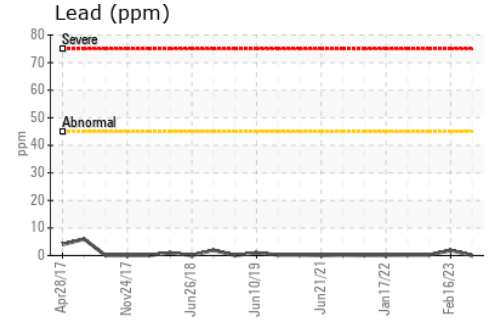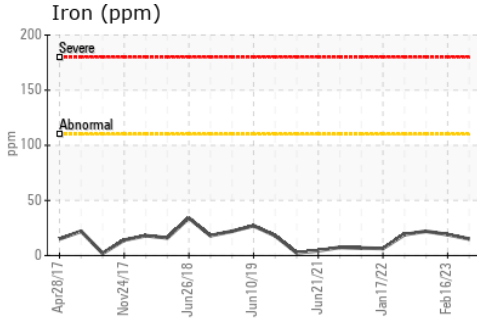

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 554 - Edmonton SW**  
**Sample No.** : GFL0093916 **Received** : 22 Sep 2023 **8409 -15th Street NW**  
**Lab Number** : 02584604 **Diagnosed** : 25 Sep 2023 **Edmonton, AB**  
**Unique Number** : 5645669 **Diagnostician** : Bill Quesnel **CA T6P 0B8**  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel ) **Contact: Tim Greig**  
**tgreig@gflenv.com**

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: