


Area  
**Aft Machinery Space [450204421]**  
Machine Id  
**Thruster Aft Center - Lubrication System (S/N Sample Tag CL-06001-S1)**  
Component  
**Lube System**  
Fluid  
**PETRO CANADA ENERGOL GR-XP ISO 150 (5000 LTR)**

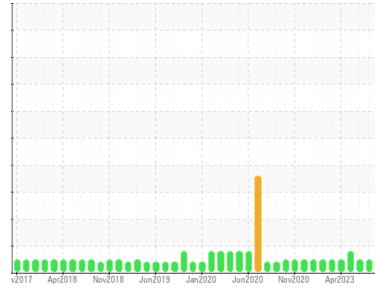

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>PC</b>	PC	PC
Sample Date	Client Info	<b>14 Sep 2023</b>	14 Aug 2023	19 Jul 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**WEAR METALS** method limit/base current history1 history2

PQ	ASTM D8184*		<b>0</b>	0	9
Iron	ppm ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Chromium	ppm ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m)	>10	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm ASTM D5185(m)		<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185(m)	>10	<b>0</b>	<1	<1
Lead	ppm ASTM D5185(m)	>20	<b>0</b>	0	0
Copper	ppm ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185(m)	>10	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)		<b>0</b>	0	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm ASTM D5185(m)		<b>2</b>	4	2
Barium	ppm ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m)		<b>&lt;1</b>	0	<1
Calcium	ppm ASTM D5185(m)		<b>4</b>	2	2
Phosphorus	ppm ASTM D5185(m)		<b>311</b>	359	346
Zinc	ppm ASTM D5185(m)		<b>5</b>	4	4
Sulfur	ppm ASTM D5185(m)		<b>7364</b>	8166	7503
Lithium	ppm ASTM D5185(m)		<b>&lt;1</b>	<1	<1






**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm ASTM D5185(m)	>15	<b>2</b>	2	2
Sodium	ppm ASTM D5185(m)		<b>&lt;1</b>	0	0
Potassium	ppm ASTM D5185(m)	>20	<b>0</b>	<1	<1

**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm	ASTM D7647	>5000	<b>316</b>	4920	3724
Particles >6µm	ASTM D7647	>1300	<b>39</b>	1191	828
Particles >14µm	ASTM D7647	>160	<b>7</b>	86	50
Particles >21µm	ASTM D7647	>40	<b>3</b>	21	12
Particles >38µm	ASTM D7647	>10	<b>0</b>	1	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>15/12/10</b>	19/17/14	19/17/13

# OIL ANALYSIS REPORT

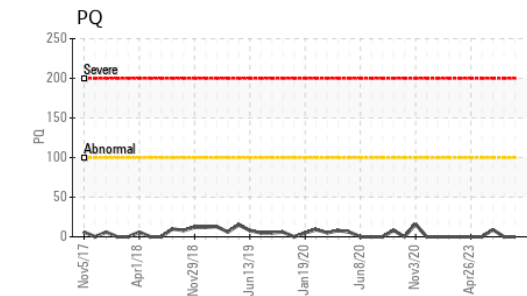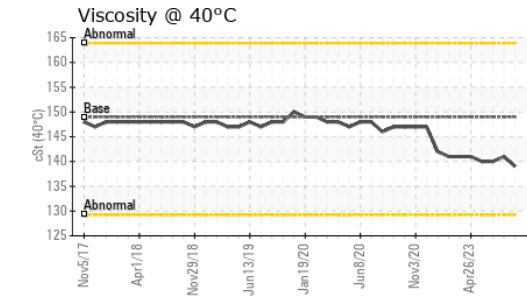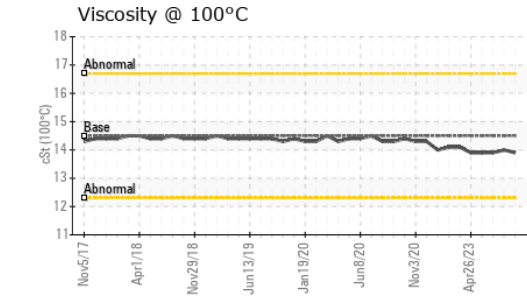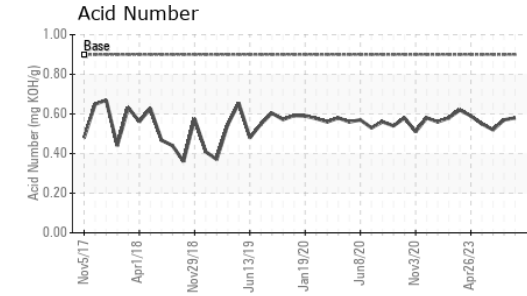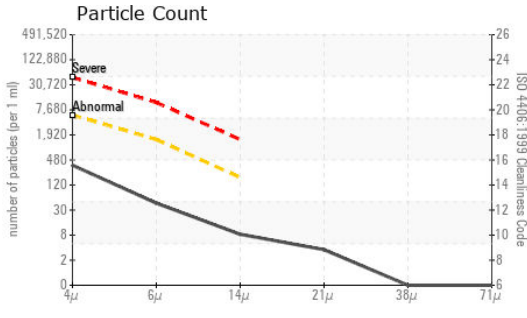


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.9	<b>0.58</b>	0.57	0.52

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	149	<b>139</b>	141	140
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	<b>13.9</b>	14.0	13.9
Viscosity Index (VI)	Scale	ASTM D2270*		<b>96</b>	95	95

## SAMPLE IMAGES

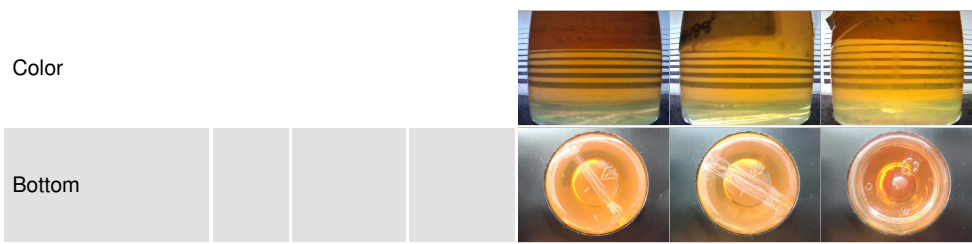

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC  
**Lab Number** : 02584915  
**Unique Number** : 5645980  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, TAN MAN, VI )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Strret  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshhynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.