




OIL ANALYSIS REPORT

Sample Rating Trend

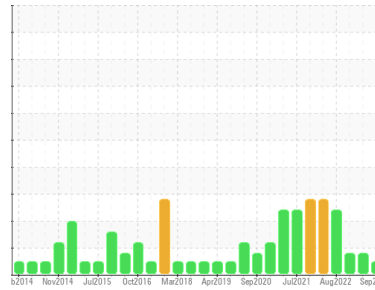

NORMAL



Machine Id
4470
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (20 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0088948	GFL0074241	GFL0049999	
Sample Date	Client Info	25 Sep 2023	27 Mar 2023	22 Oct 2022	
Machine Age	hrs	Client Info	16925	0	15307
Oil Age	hrs	Client Info	403	0	277
Oil Changed	Client Info	Changed	N/A	Changed	
Sample Status		NORMAL	MARGINAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	▲ 4.2	▲ 3.1
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >90	12	17	11
Chromium	ppm ASTM D5185(m) >20	<1	<1	<1
Nickel	ppm ASTM D5185(m) >2	0	<1	<1
Titanium	ppm ASTM D5185(m) >2	0	<1	0
Silver	ppm ASTM D5185(m) >2	<1	0	0
Aluminum	ppm ASTM D5185(m) >20	<1	2	1
Lead	ppm ASTM D5185(m) >40	<1	0	0
Copper	ppm ASTM D5185(m) >330	<1	<1	<1
Tin	ppm ASTM D5185(m) >15	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	4	4	6
Barium	ppm ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm ASTM D5185(m) 60	58	58	56
Manganese	ppm ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	918	935	919
Calcium	ppm ASTM D5185(m) 1070	1008	1084	1048
Phosphorus	ppm ASTM D5185(m) 1150	982	1049	1021
Zinc	ppm ASTM D5185(m) 1270	1141	1177	1118
Sulfur	ppm ASTM D5185(m) 2060	2388	2514	2518
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	2	3	3
Sodium	ppm ASTM D5185(m)	2	2	2
Potassium	ppm ASTM D5185(m) >20	<1	<1	0

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >6	0.2	0.1	0
Nitration	Abs/cm ASTM D7624* >20	7.6	9.8	7.1
Sulfation	Abs/.1mm ASTM D7415* >30	18.6	22.0	19.6

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	15.1	17.8	15.5











OIL ANALYSIS REPORT

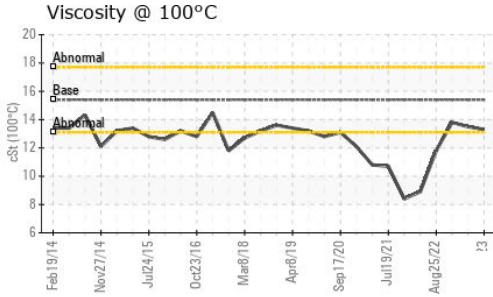

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.3	13.5

GRAPHS

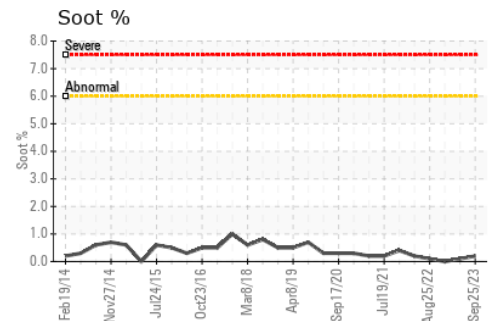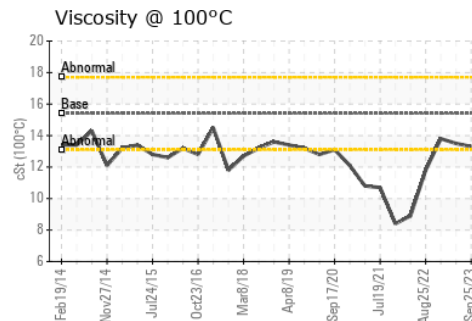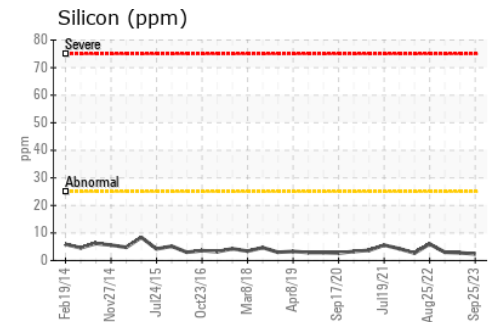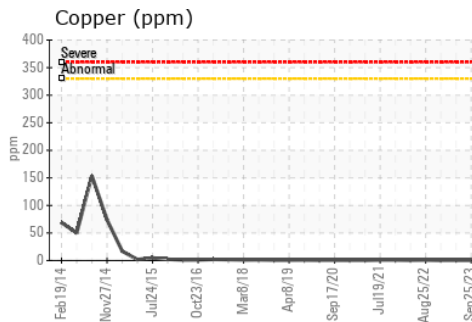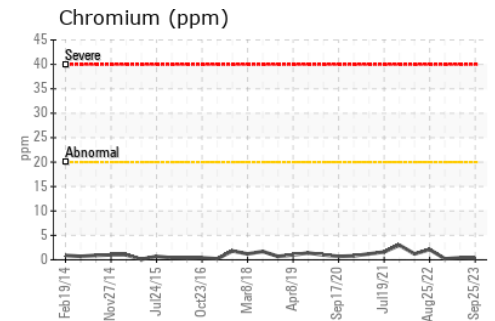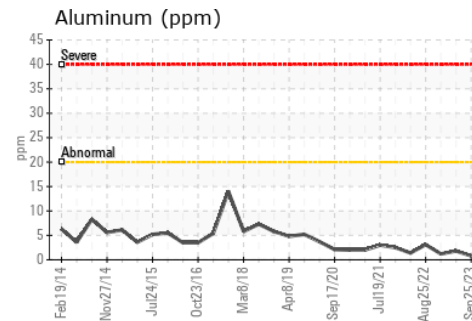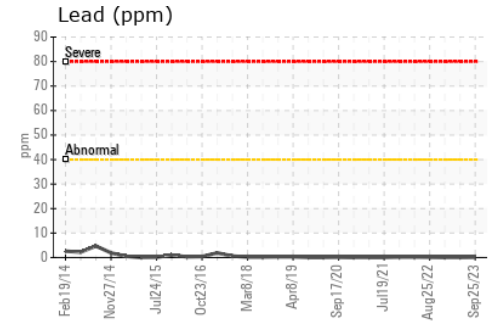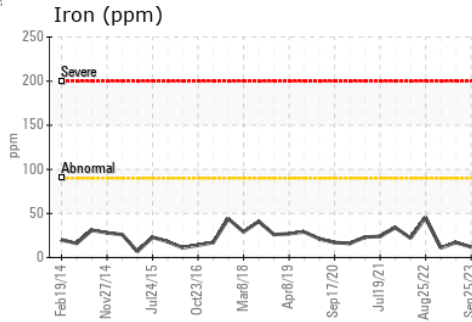

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0088948 **Received** : 26 Sep 2023
Lab Number : 02585165 **Diagnosed** : 26 Sep 2023
Unique Number : 5646230 **Diagnostician** : Wes Davis
Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road, Building B
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.