




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**928062**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

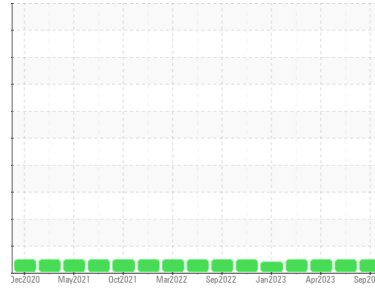

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0071481</b>	GFL0071499	GFL0071492
Sample Date	Client Info		<b>19 Sep 2023</b>	22 Jun 2023	27 Apr 2023
Machine Age	hrs	Client Info	<b>294269</b>	286948	278966
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>5</b>	6	8
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	3	13
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	1	2
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>61</b>	56	59
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>986</b>	946	973
Calcium	ppm	ASTM D5185(m)	1070	<b>1057</b>	1018	1101
Phosphorus	ppm	ASTM D5185(m)	1150	<b>981</b>	959	1025
Zinc	ppm	ASTM D5185(m)	1270	<b>1191</b>	1149	1179
Sulfur	ppm	ASTM D5185(m)	2060	<b>2266</b>	2150	2328
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	3	2
Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	6
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.3</b>	7.3	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.5</b>	19.8	19.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.7</b>	16.0	15.4











# OIL ANALYSIS REPORT

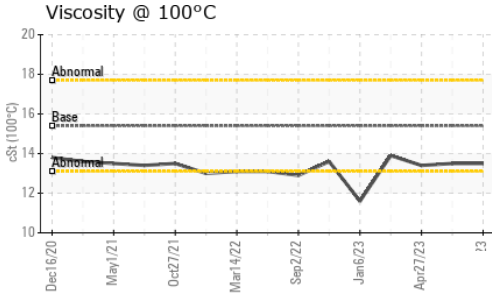

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.4

## GRAPHS

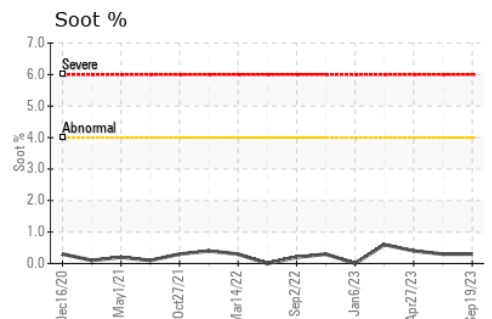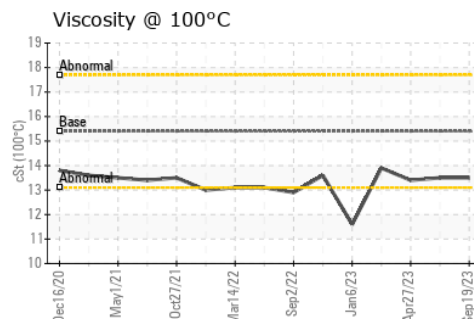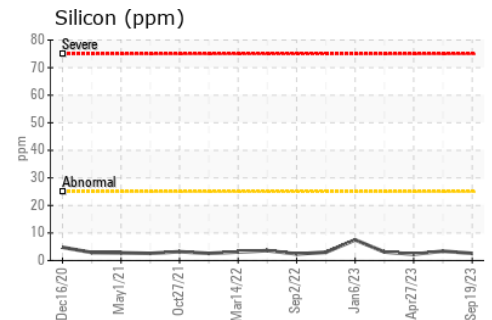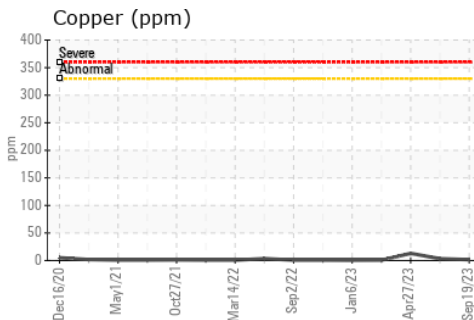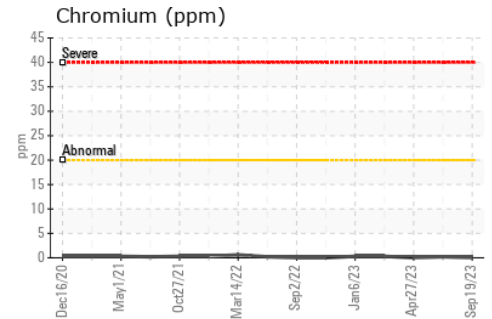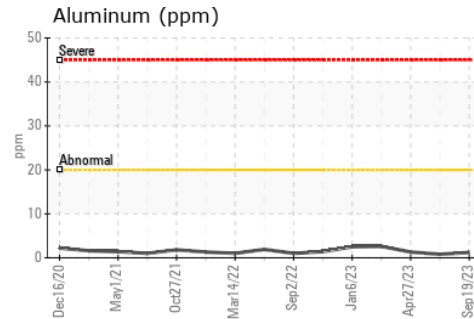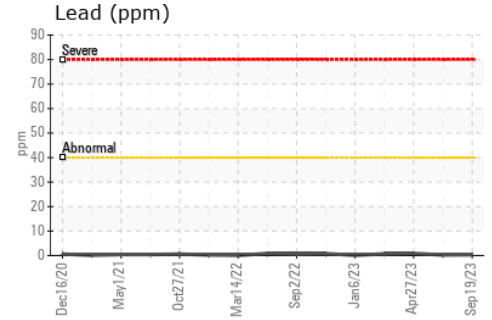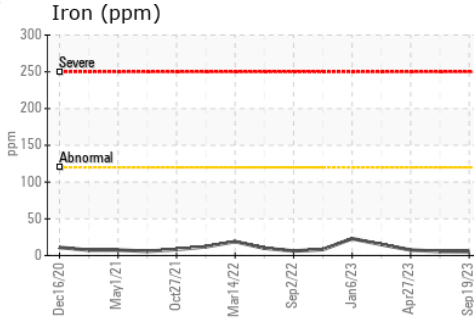

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0071481 **Received** : 26 Sep 2023  
**Lab Number** : 02585174 **Diagnosed** : 26 Sep 2023  
**Unique Number** : 5646239 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 216M**  
 2475 Beryl Drive  
 Oakville, ON  
 CA L6J 7X4  
 Contact: Matthew Gunness  
 mgunness@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: