



Machine Id
831025
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX MV 32 (--- GAL)



DIAGNOSIS

Recommendation

Nous vous recommandons de vérifier tous les endroits par lesquels des contaminants peuvent pénétrer dans le système. Nous vous recommandons de remplacer le filtre et d'utiliser un système de filtrage hors-ligne afin d'améliorer la propreté du fluide. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une quantité élevée de matières particulaires (2 à 100 µm de taille) présente dans l'huile.

Fluid Condition

l'huile peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | PC0071762 | --- | --- |
| Sample Date | Client Info | | 28 Aug 2023 | --- | --- |
| Machine Age | kms | Client Info | 0 | --- | --- |
| Oil Age | kms | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | SEVERE | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >40 | 17 | --- | --- |
| Chromium | ppm | ASTM D5185(m) >5 | 2 | --- | --- |
| Nickel | ppm | ASTM D5185(m) >2 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) >2 | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) >8 | 2 | --- | --- |
| Lead | ppm | ASTM D5185(m) >5 | 0 | --- | --- |
| Copper | ppm | ASTM D5185(m) >20 | 1 | --- | --- |
| Tin | ppm | ASTM D5185(m) >2 | 0 | --- | --- |
| Antimony | ppm | ASTM D5185(m) >2 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185(m) | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | 4 | --- | --- |
| Barium | ppm | ASTM D5185(m) 0 | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) 0 | 3 | --- | --- |
| Manganese | ppm | ASTM D5185(m) 1 | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) 0 | 40 | --- | --- |
| Calcium | ppm | ASTM D5185(m) 50 | 117 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) 330 | 365 | --- | --- |
| Zinc | ppm | ASTM D5185(m) 430 | 467 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) 760 | 876 | --- | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | --- | --- |





CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >20 | 5 | --- | --- |
| Sodium | ppm | ASTM D5185(m) | 10 | --- | --- |
| Potassium | ppm | ASTM D5185(m) >20 | 12 | --- | --- |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 65014 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | 16617 | --- | --- |
| Particles >14µm | ASTM D7647 | >160 | 1916 | --- | --- |
| Particles >21µm | ASTM D7647 | >40 | 589 | --- | --- |
| Particles >38µm | ASTM D7647 | >10 | 13 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 1 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 23/21/18 | --- | --- |

OIL ANALYSIS REPORT

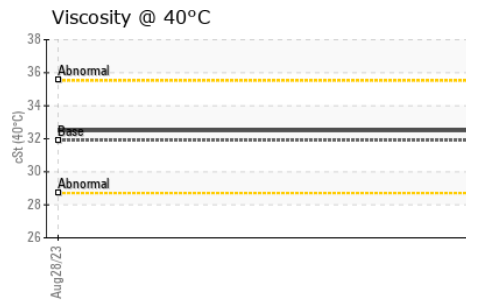
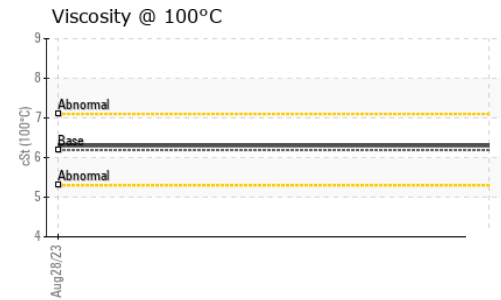
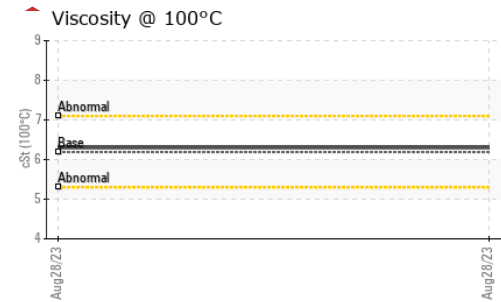
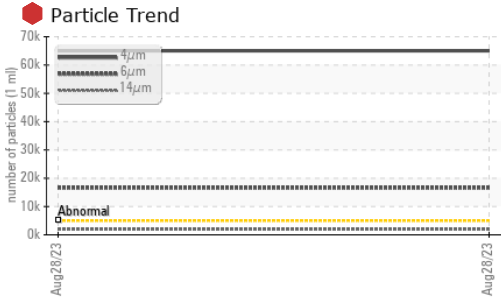


| PROPERTY | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| VISUAL | | | | | |
| White Metal | scalar | Visual* | NONE | NONE | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- |
| Silt | scalar | Visual* | NONE | NONE | --- |
| Debris | scalar | Visual* | NONE | NONE | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- |
| Odor | scalar | Visual* | NORML | NORML | --- |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | --- |
| Free Water | scalar | Visual* | | NEG | --- |

| PROPERTY | method | limit/base | current | history1 | history2 |
|-------------------------|--------|---------------|---------|----------|----------|
| FLUID PROPERTIES | | | | | |
| Visc @ 40°C | cSt | ASTM D7279(m) | 31.9 | 32.5 | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | 6.19 | 6.3 | --- |
| Viscosity Index (VI) | Scale | ASTM D2270* | 147 | 147 | --- |

| PROPERTY | method | limit/base | current | history1 | history2 |
|----------------------|--------|------------|---------|----------|----------|
| SAMPLE IMAGES | | | | | |
| Color | | | | no image | no image |
| Bottom | | | | no image | no image |

GRAPHS

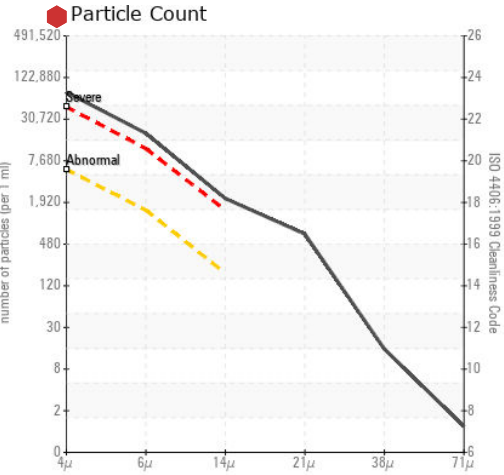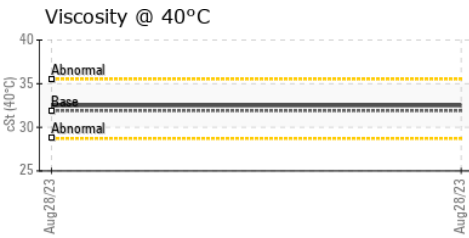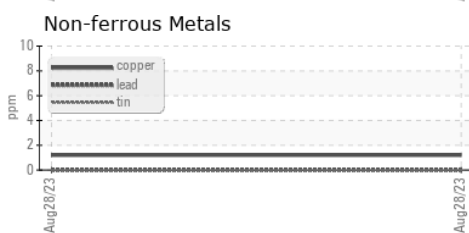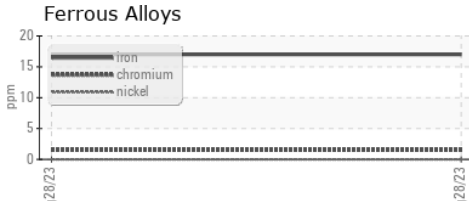

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 742 - Quebec City Solid Waste
Sample No. : PC0071762 **Received** : 27 Sep 2023 5160 Jean-Talon Pierre-Bertrand Bou
Lab Number : 02585575 **Diagnosed** : 28 Sep 2023 Quebec City, QC
Unique Number : 5646640 **Diagnostician** : Wes Davis CA G2J 1B7
Test Package : MOB 1 (Additional Tests: KV100, PrtCount, VI) Contact: Jean Audet

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Jaudet@matrec.ca
 T: (418)624-0080
 F: