



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**{UNASSIGNED}**  
 Machine Id  
**OR1985**  
 Component  
**Front Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (16 LTR)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Oil sampled unknown. Replaced with Duron shp 15w40 )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0092203</b>	---	---
Sample Date	Client Info	<b>19 Sep 2023</b>	---	---
Machine Age	hrs Client Info	<b>9100</b>	---	---
Oil Age	hrs Client Info	<b>500</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	<b>42</b>	---	---
Chromium	ppm ASTM D5185(m) >20	<b>1</b>	---	---
Nickel	ppm ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185(m) >20	<b>2</b>	---	---
Lead	ppm ASTM D5185(m) >40	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185(m) >330	<b>1</b>	---	---
Tin	ppm ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>6</b>	---	---
Barium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Molybdenum	ppm ASTM D5185(m) 60	<b>57</b>	---	---
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm ASTM D5185(m) 1010	<b>860</b>	---	---
Calcium	ppm ASTM D5185(m) 1070	<b>1222</b>	---	---
Phosphorus	ppm ASTM D5185(m) 1150	<b>1019</b>	---	---
Zinc	ppm ASTM D5185(m) 1270	<b>1209</b>	---	---
Sulfur	ppm ASTM D5185(m) 2060	<b>2567</b>	---	---
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	<b>10</b>	---	---
Sodium	ppm ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.2</b>	---	---
Nitration	Abs/cm ASTM D7624* >20	<b>7.3</b>	---	---
Sulfation	Abs/.1mm ASTM D7415* >30	<b>18.9</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	<b>14.5</b>	---	---











# OIL ANALYSIS REPORT

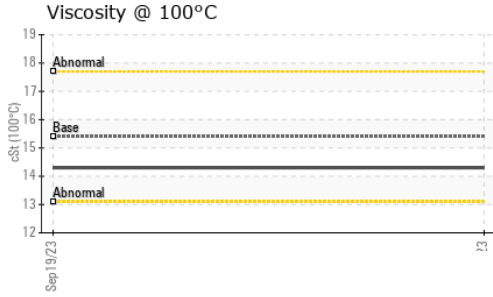

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.3	---

## GRAPHS

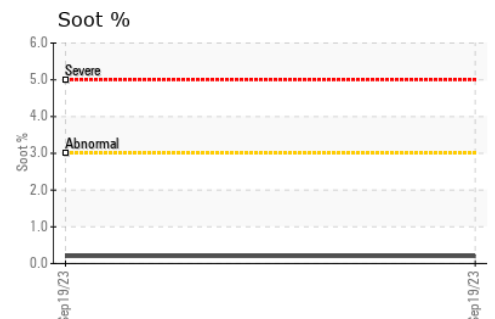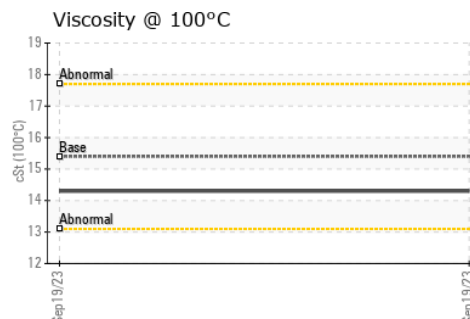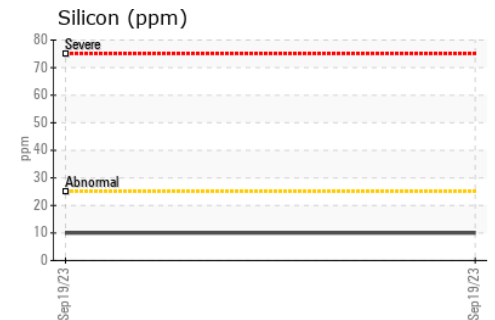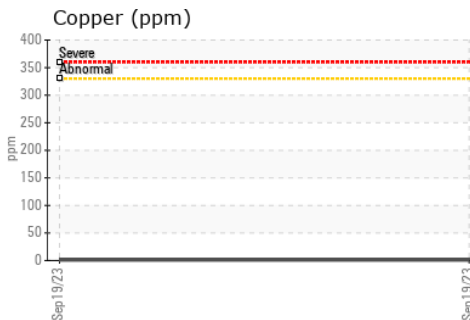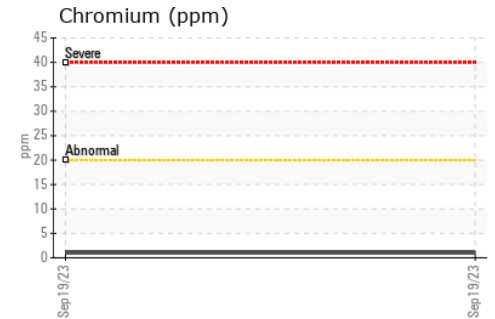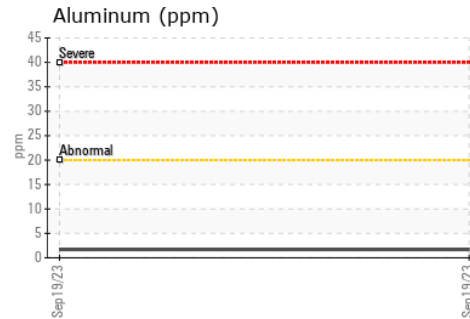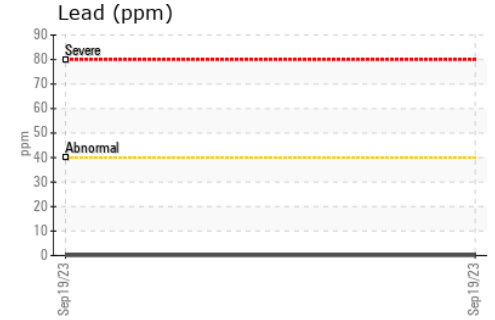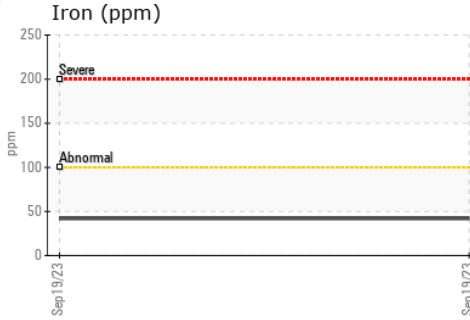

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 720 - Lafleche - Landfill  
**Sample No.** : GFL0092203 **Received** : 28 Sep 2023 17125 Lafleche Road,  
**Lab Number** : 02585751 **Diagnosed** : 28 Sep 2023 Moose Creek, ON  
**Unique Number** : 5646816 **Diagnostician** : Kevin Marson CA K0C 1W0  
**Test Package** : MOB 1 **Contact:** Charles Bergeron  
cbergeron@gflenv.com  
T: (613)538-4853  
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.