

Machine Id  
**HP3**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. The fluid was specified as PETRO CANADA HYDREX AW 46, however, a fluid match indicates that this fluid is ISO 46 Environmental Oil. Please confirm the oil type and grade on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0076756</b>	PC0029856	---
Sample Date	Client Info	<b>25 Sep 2023</b>	29 Nov 2022	---
Machine Age	mths Client Info	<b>66</b>	56	---
Oil Age	mths Client Info	<b>0</b>	56	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>NORMAL</b>	ATTENTION	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	<b>9</b>	9	---
Chromium ppm ASTM D5185(m)	>20	<b>0</b>	0	---
Nickel ppm ASTM D5185(m)	>20	<b>0</b>	0	---
Titanium ppm ASTM D5185(m)		<b>0</b>	0	---
Silver ppm ASTM D5185(m)		<b>0</b>	0	---
Aluminum ppm ASTM D5185(m)	>20	<b>0</b>	0	---
Lead ppm ASTM D5185(m)	>20	<b>0</b>	<1	---
Copper ppm ASTM D5185(m)	>20	<b>2</b>	2	---
Tin ppm ASTM D5185(m)	>20	<b>0</b>	0	---
Antimony ppm ASTM D5185(m)		<b>0</b>	0	---
Vanadium ppm ASTM D5185(m)		<b>0</b>	0	---
Beryllium ppm ASTM D5185(m)		<b>0</b>	0	---
Cadmium ppm ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)	0	<b>&lt;1</b>	<1	---
Barium ppm ASTM D5185(m)	0	<b>&lt;1</b>	0	---
Molybdenum ppm ASTM D5185(m)	0	<b>0</b>	0	---
Manganese ppm ASTM D5185(m)	0	<b>0</b>	<1	---
Magnesium ppm ASTM D5185(m)	0	<b>0</b>	0	---
Calcium ppm ASTM D5185(m)	50	<b>&lt;1</b>	▲ 0	---
Phosphorus ppm ASTM D5185(m)	330	<b>438</b>	462	---
Zinc ppm ASTM D5185(m)	430	<b>14</b>	▲ 13	---
Sulfur ppm ASTM D5185(m)	760	<b>859</b>	886	---
Lithium ppm ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>15	<b>3</b>	3	---
Sodium ppm ASTM D5185(m)		<b>1</b>	1	---
Potassium ppm ASTM D5185(m)	>20	<b>0</b>	<1	---






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>330</b>	109	---
Particles >6µm ASTM D7647	>1300	<b>131</b>	33	---
Particles >14µm ASTM D7647	>160	<b>22</b>	4	---
Particles >21µm ASTM D7647	>40	<b>8</b>	2	---
Particles >38µm ASTM D7647	>10	<b>1</b>	0	---
Particles >71µm ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>16/14/12</b>	14/12/9	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D974*	0.70	<b>0.19</b>	0.19	---


# OIL ANALYSIS REPORT

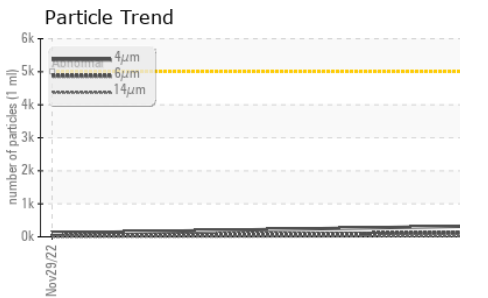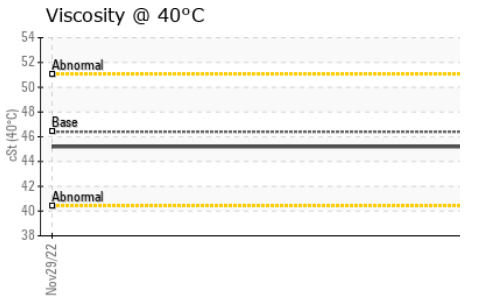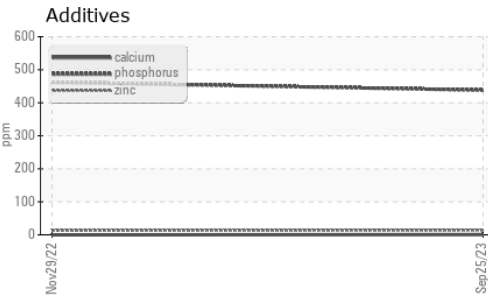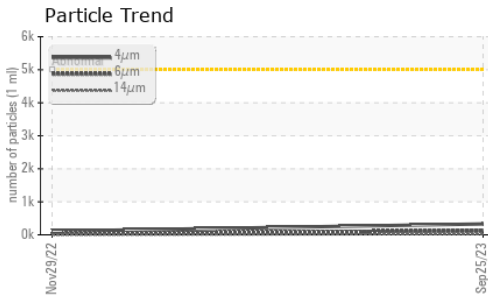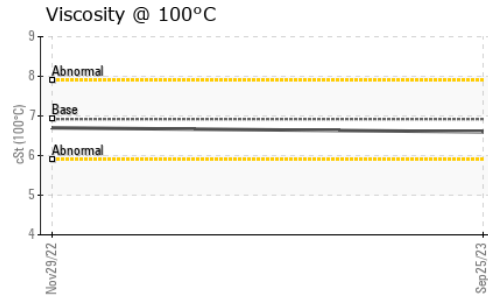



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	45.2	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.92	6.6	---
Viscosity Index (VI)	Scale	ASTM D2270*	104	96	---

## SAMPLE IMAGES

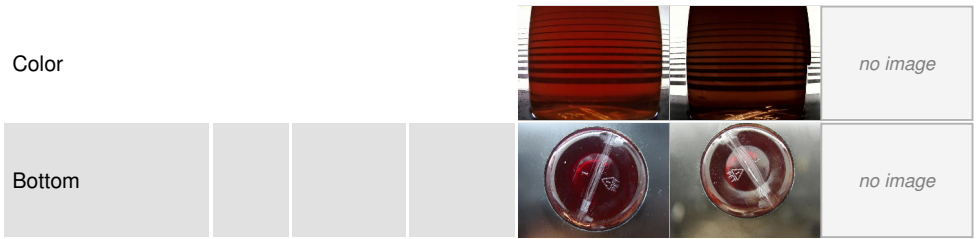

## GRAPHS

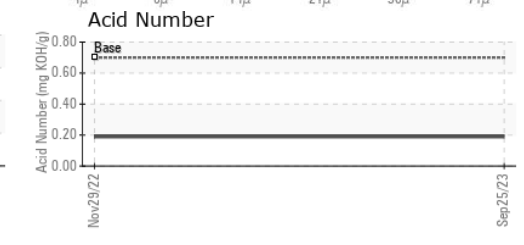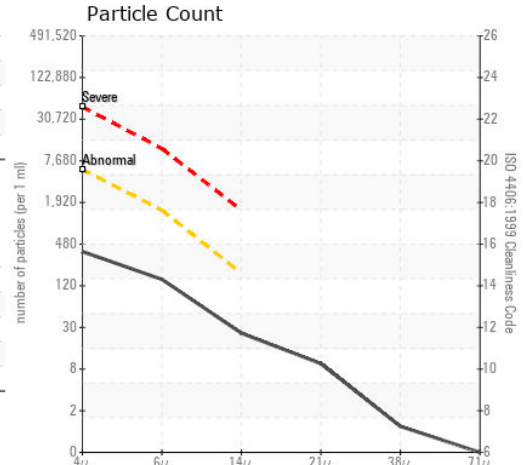

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0076756 **Received** : 28 Sep 2023  
**Lab Number** : 02585862 **Diagnosed** : 02 Oct 2023  
**Unique Number** : 5654928 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

**WESTMORLAND FISHERIES**  
 64 GAUTREAU STREET  
 CAP-PELE, NB  
 CA E4N 1V3  
 Contact: Serge Losier  
 serge.losier@westmorlandfisheries.ca  
 T: (506)530-0426  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.