


# PROBLEM SUMMARY


Sample Rating Trend

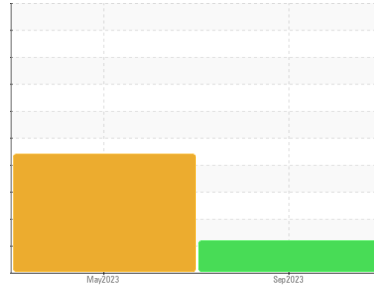

Machine Id  
**#3**  
Component  
**New (Unused) Oil**  
Fluid  
**PETRO CANADA TRAXON E SYNTHETIC 80W140 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

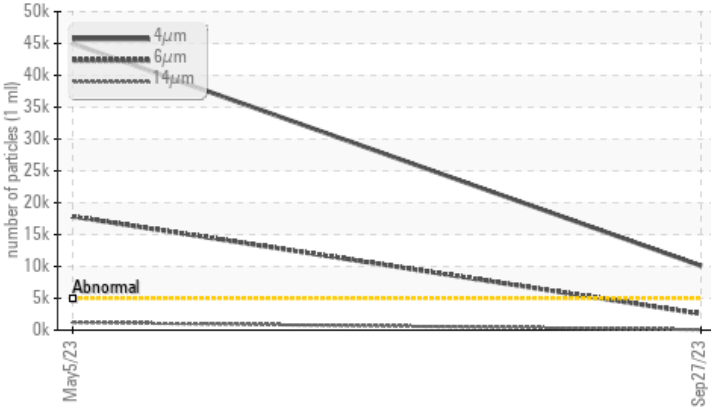

## RECOMMENDATION

This is the baseline readout on this new (unused) oil. The fluid is suitable for service. We recommend an early resample to monitor this condition. NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	SEVERE	---
Particles >4µm	ASTM D7647	>5000	▲ <b>10106</b>	● 44994	---
Particles >6µm	ASTM D7647	>1300	▲ <b>2555</b>	● 17837	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/13</b>	● 23/21/17	---

Customer Id: PROAMO  
Sample No.: PC0080892  
Lab Number: 02586745  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Kevin Marson +1 (289)291-4644 x4644  
[Kevin.Marson@wearcheck.com](mailto:Kevin.Marson@wearcheck.com)

To change component or sample information:  
Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

## HISTORICAL DIAGNOSIS

### 05 May 2023 Diag: Kevin Marson

ISO



This is the baseline readout on this new (unused) oil. The fluid is suitable for service. Resample in 30-45 days to monitor this situation. NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product. {not applicable} There is a high amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for service. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report





Machine Id


**#3**

Component

**New (Unused) Oil**

Fluid

**PETRO CANADA TRAXON E SYNTHETIC 80W/140 (--- GAL)**

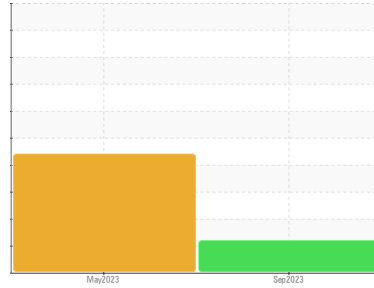

## DIAGNOSIS

### Recommendation

This is the baseline readout on this new (unused) oil. The fluid is suitable for service. We recommend an early resample to monitor this condition. NOTE: New oils are not generally filtered or guaranteed to a certain cleanliness code. We advise that you verify the target cleanliness code for your application and recommend the use of a portable filter cart to fill any system with a target code below the ISO cleanliness code of this product.

### Wear

(not applicable)

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for service. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PC0080892</b>	PC0076072	---
Sample Date	Client Info	<b>27 Sep 2023</b>	05 May 2023	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	<b>N/A</b>	N/A	---
Sample Status		<b>ABNORMAL</b>	SEVERE	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	<1	1	---
Chromium	ppm	ASTM D5185(m)	0	0	---
Nickel	ppm	ASTM D5185(m)	0	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	<1	0	---
Aluminum	ppm	ASTM D5185(m)	0	<1	---
Lead	ppm	ASTM D5185(m)	0	0	---
Copper	ppm	ASTM D5185(m)	<1	0	---
Tin	ppm	ASTM D5185(m)	0	0	---
Antimony	ppm	ASTM D5185(m)	0	<1	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	202	<b>206</b>	215	---
Barium	ppm	ASTM D5185(m)	<1	<1	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	<1	<b>3</b>	<1	---
Calcium	ppm	ASTM D5185(m)		<b>6</b>	2	---
Phosphorus	ppm	ASTM D5185(m)	1209	<b>1179</b>	1308	---
Zinc	ppm	ASTM D5185(m)	1	<b>5</b>	3	---
Sulfur	ppm	ASTM D5185(m)	20439	<b>19687</b>	21171	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---






## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)		<1	<1	---
Sodium	ppm	ASTM D5185(m)		<b>1</b>	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*		<b>0</b>	0	---
Nitration	Abs/cm	ASTM D7624*		<b>3.4</b>	3.4	---
Sulfation	Abs./1mm	ASTM D7415*		<b>114.8</b>	115.9	---

# OIL ANALYSIS REPORT

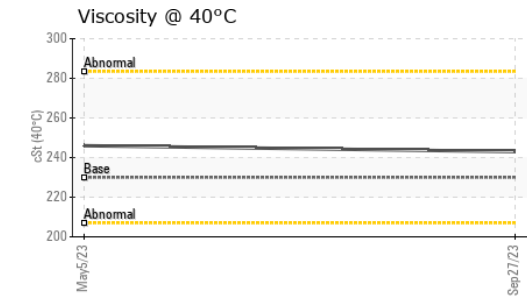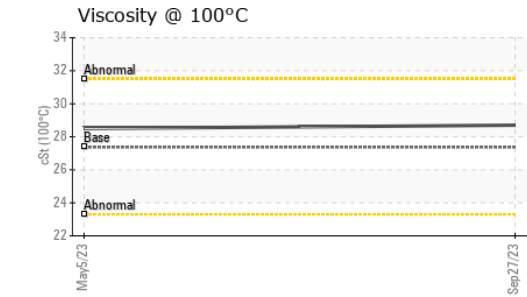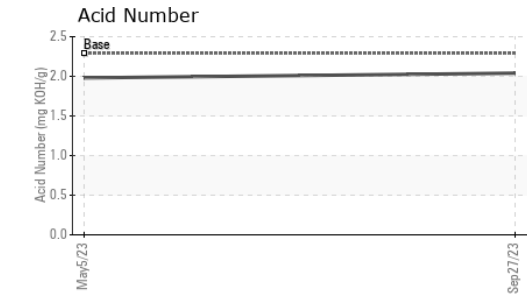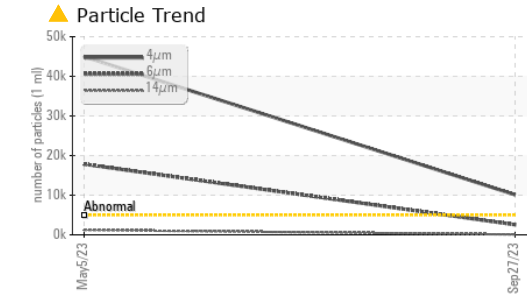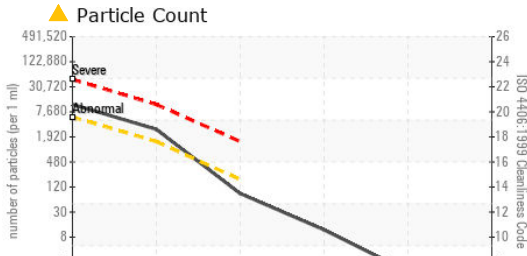

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ <b>10106</b>	● 44994	---	
Particles >6µm	ASTM D7647	>1300	▲ <b>2555</b>	● 17837	---	
Particles >14µm	ASTM D7647	>160	<b>74</b>	▲ 1217	---	
Particles >21µm	ASTM D7647	>40	<b>10</b>	▲ 193	---	
Particles >38µm	ASTM D7647	>10	<b>1</b>	3	---	
Particles >71µm	ASTM D7647	>3	<b>0</b>	1	---	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>21/19/13</b>	● 23/21/17	---	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*		<b>97.6</b>	99.8	---
Acid Number (AN)	mg KOH/g	ASTM D974*	2.29	<b>2.04</b>	1.98	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*		<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	230	<b>243</b>	246	---
Visc @ 100°C	cSt	ASTM D7279(m)	27.37	<b>28.7</b>	28.5	---
Viscosity Index (VI)	Scale	ASTM D2270*	154	<b>155</b>	152	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0080892 **Received** : 04 Oct 2023  
**Lab Number** : **02586745** **Diagnosed** : 05 Oct 2023  
**Unique Number** : 5655811 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TAN Man, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**PETRONOR INC**  
 2920 RTE 111 EST  
 AMOS, QC  
 CA J9T 3A1  
 Contact: Gaston  
 entretien@petronor.ca  
 T: (819)732-5334  
 F: