


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

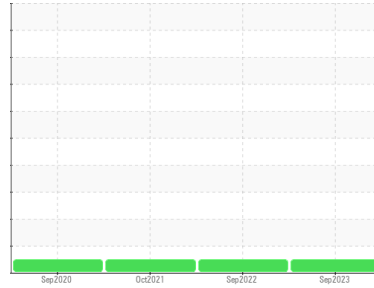

Machine Id  
**300988 P-19**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078188</b>	PC0054318	PC0050406
Sample Date	Client Info			<b>25 Sep 2023</b>	22 Sep 2022	03 Oct 2021
Machine Age	kms	Client Info		<b>11112</b>	8500	0
Oil Age	kms	Client Info		<b>0</b>	1500	0
Oil Changed	Client Info			<b>N/A</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	<b>11</b>	11	14
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185(m)	>330	<b>6</b>	16	50
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>3</b>	3	13
Barium	ppm	ASTM D5185(m)	10	<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	<b>61</b>	57	53
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>958</b>	937	905
Calcium	ppm	ASTM D5185(m)	3000	<b>1052</b>	1058	1125
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1035</b>	1062	1060
Zinc	ppm	ASTM D5185(m)	1350	<b>1194</b>	1178	1224
Sulfur	ppm	ASTM D5185(m)	4250	<b>2576</b>	2602	2671
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	6	14
Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	4	9

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.9</b>	7.6	7.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.6</b>	20.2	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.2</b>	15.4	15.2









# OIL ANALYSIS REPORT

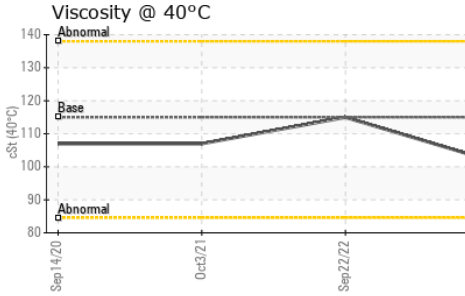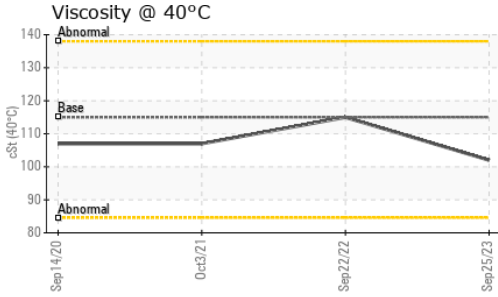

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>102</b>	115	107
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.0</b>	14.2	14.4
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>139</b>	124	137

## GRAPHS

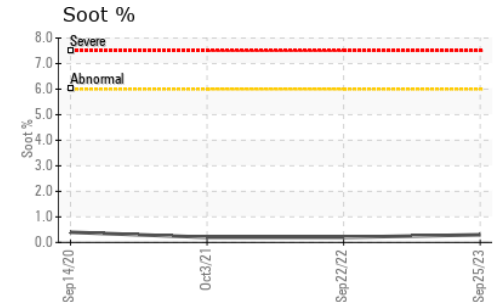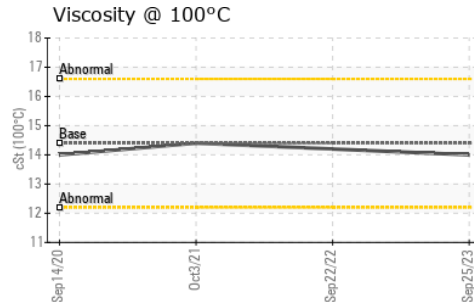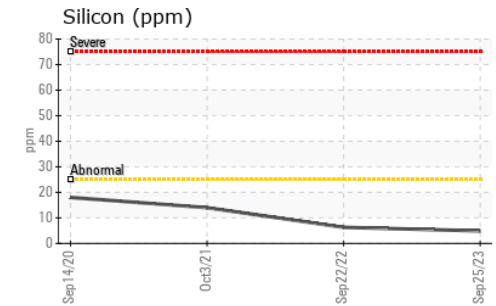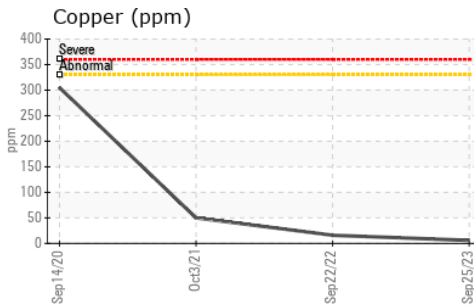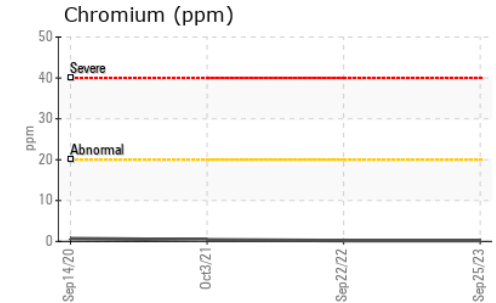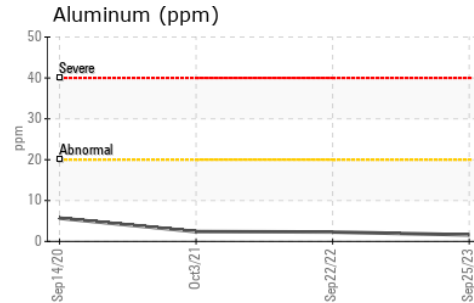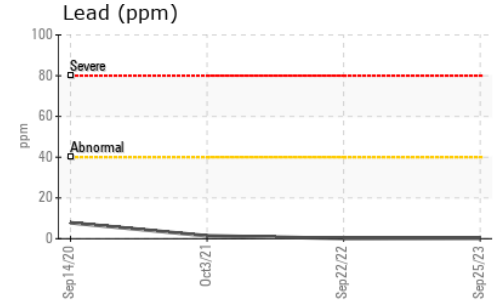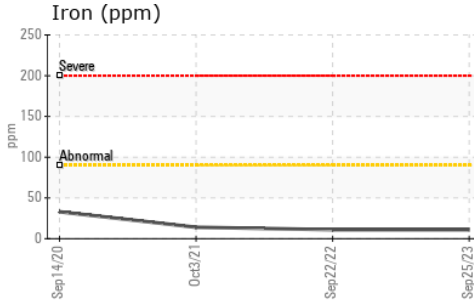

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0078188  
**Lab Number** : **02587474**  
**Unique Number** : 5656540  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**HAMILTON FIRE DEPT**  
 MECHANICAL DIV., 177 BAY STREET NORTH  
 HAMILTON, ON  
 CA L8R 2P8  
 Contact: Jenny-Lynn Pellegrino  
 jenny-lynn.pellegrino@hamilton.ca  
 T: (905)546-2424  
 F: (905)961-9116

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*