


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR P105 (S/N CAT00349CR4620575)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

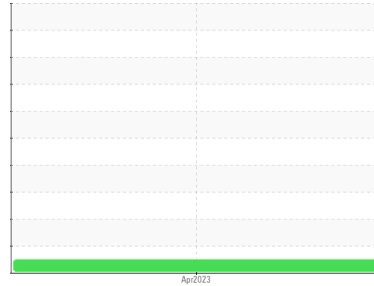

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0861325	---	---
Sample Date	Client Info			10 Apr 2023	---	---
Machine Age	hrs	Client Info		2177	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	---	---
Glycol	WC Method			NEG	---	---




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	11	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>2	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>25	2	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	6	---	---
Tin	ppm	ASTM D5185(m)	>15	<1	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	4	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	56	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	906	---	---
Calcium	ppm	ASTM D5185(m)	3000	1098	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	968	---	---
Zinc	ppm	ASTM D5185(m)	1350	1158	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2523	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	6	---	---
Sodium	ppm	ASTM D5185(m)		2	---	---
Potassium	ppm	ASTM D5185(m)	>20	0	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.3	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.8	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	18.6	---	---

OIL ANALYSIS REPORT






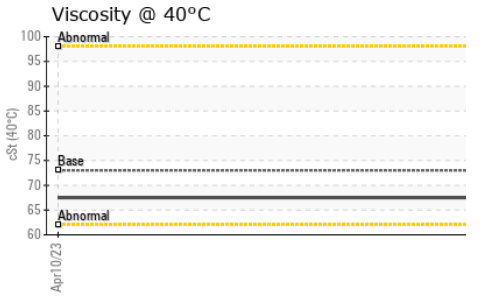
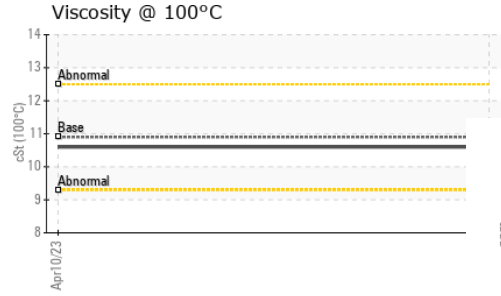
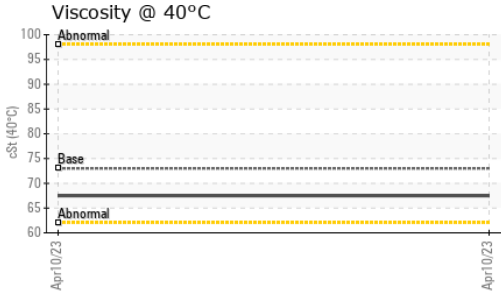


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	9.64	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	73	67.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	10.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	138	145	---	---

GRAPHS

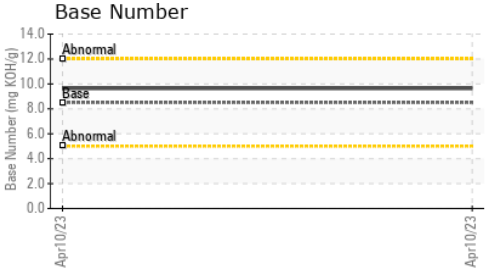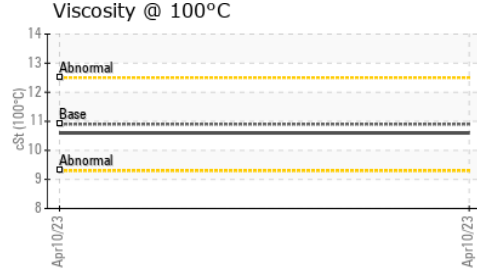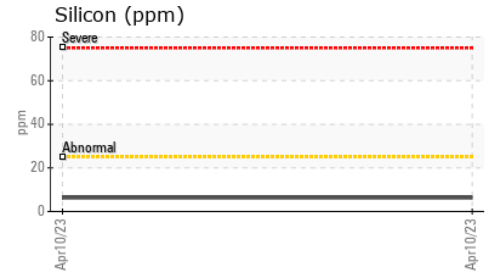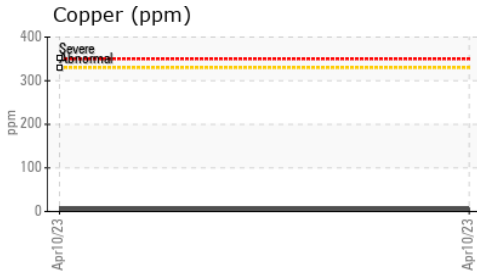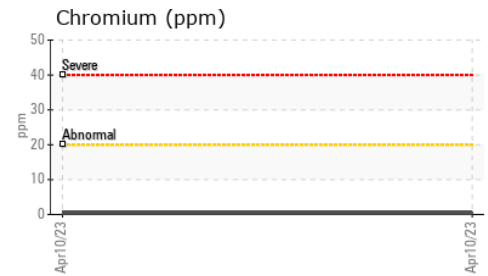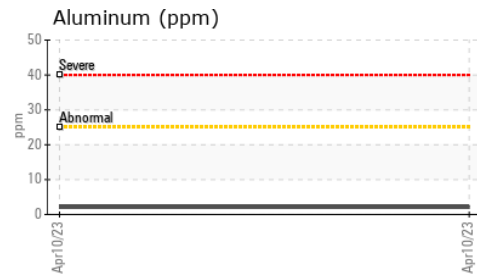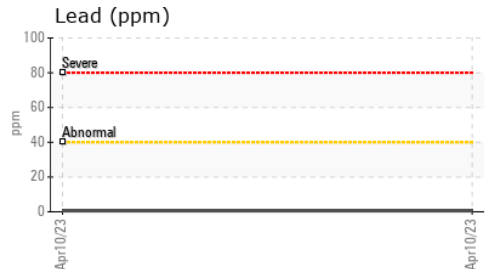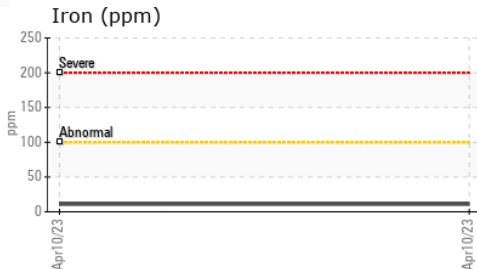

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0861325 **Received** : 11 Oct 2023
Lab Number : **02588060** **Diagnosed** : 12 Oct 2023
Unique Number : 5657126 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

CLEMENT HYDRAULITECH
 5328 BOUL. HEBERT
 SALABERRY-DE-VALLEYFIELD, QC
 CA J6S 6H3
 Contact: Frédéric D'Amour
 info@hydraulitech.com
 T: (450)373-1613
 F: (450)373-1615

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.