




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
7177
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (21 LTR)

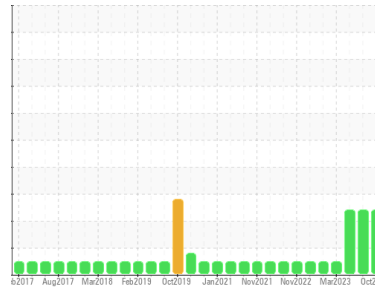

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0061108	GFL0088945	GFL0088927
Sample Date	Client Info		06 Oct 2023	28 Aug 2023	02 Aug 2023
Machine Age	hrs	Client Info	17035	0	16484
Oil Age	hrs	Client Info	383	0	15909
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >130	22	15	39
Chromium	ppm	ASTM D5185(m) >10	1	<1	2
Nickel	ppm	ASTM D5185(m) >4	0	0	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	3	2	4
Lead	ppm	ASTM D5185(m) >20	<1	0	<1
Copper	ppm	ASTM D5185(m) >125	<1	<1	2
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	5	4	4
Barium	ppm	ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 60	59	58	57
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	903	928	928
Calcium	ppm	ASTM D5185(m) 1070	988	1009	988
Phosphorus	ppm	ASTM D5185(m) 1150	937	1021	1007
Zinc	ppm	ASTM D5185(m) 1270	1127	1140	1147
Sulfur	ppm	ASTM D5185(m) 2060	2337	2441	2246
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	4	3	6
Sodium	ppm	ASTM D5185(m)	7	6	7
Potassium	ppm	ASTM D5185(m) >20	4	2	5
Fuel	%	ASTM D7593* >3.0	9	6.4	9.9

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	0	0.4	0.8
Nitration	Abs/cm	ASTM D7624* >20	2.8	11.1	14.4
Sulfation	Abs/.1mm	ASTM D7415* >30	11.9	21.8	26.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	4.0	18.6	24.6











OIL ANALYSIS REPORT

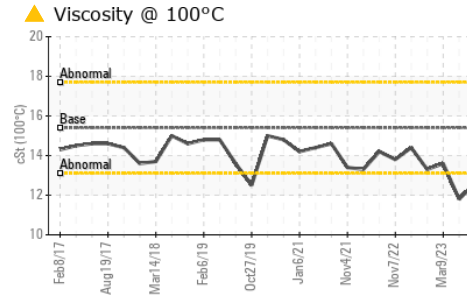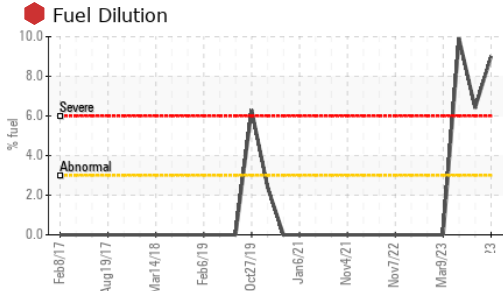

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.6	▲ 12.6

GRAPHS

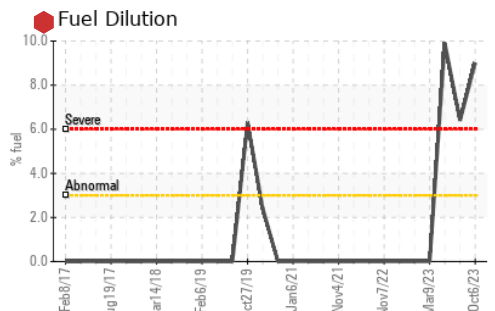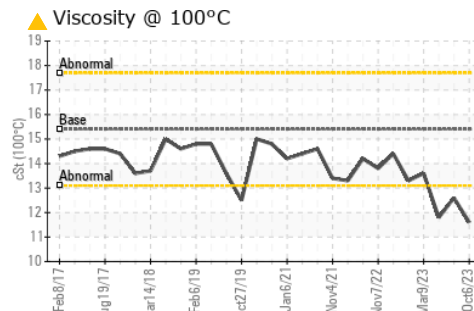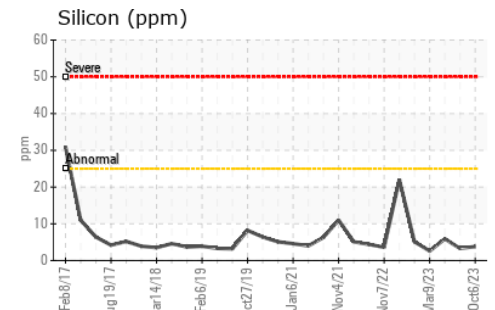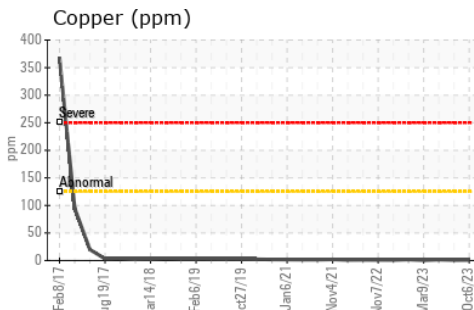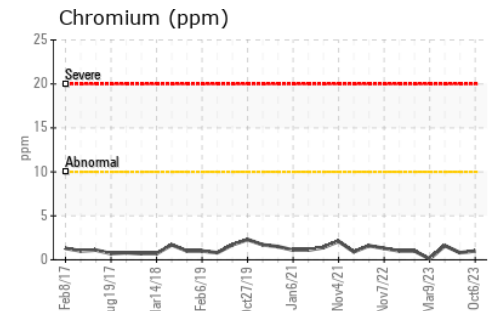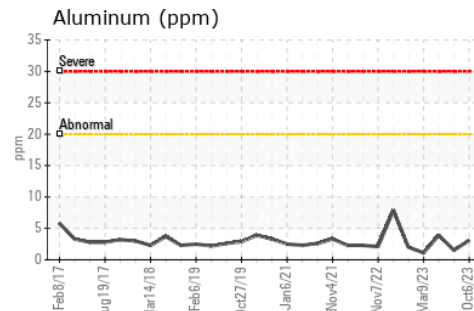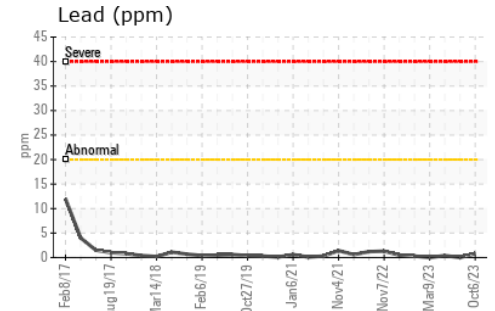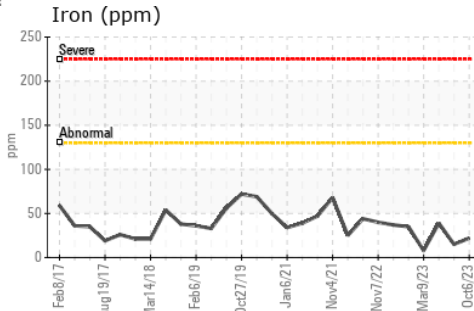

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : GFL0061108 Received : 11 Oct 2023
 Lab Number : 02588155 Diagnosed : 12 Oct 2023
 Unique Number : 5657221 Diagnostician : Wes Davis
 Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GFL Environmental - 216
 15 Bermondsey Road, Building B
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F: