




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

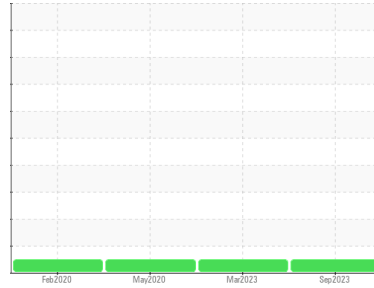

Machine Id
7140

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088888	GFL0073399	PC0024345
Sample Date	Client Info		29 Sep 2023	08 Mar 2023	01 May 2020
Machine Age	kms	Client Info	21451	23917	99148
Oil Age	kms	Client Info	0	600	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>65	14	24	13
Chromium	ppm	ASTM D5185(m)	>5	1	1	<1
Nickel	ppm	ASTM D5185(m)	>3	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>5	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>35	17	19	4
Lead	ppm	ASTM D5185(m)	>10	<1	<1	0
Copper	ppm	ASTM D5185(m)	>180	3	22	2
Tin	ppm	ASTM D5185(m)	>8	0	<1	<1
Antimony	ppm	ASTM D5185(m)	>35	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	1	10	1
Barium	ppm	ASTM D5185(m)	10	<1	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	62	69	61
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	978	835	1023
Calcium	ppm	ASTM D5185(m)	3000	1046	1234	1066
Phosphorus	ppm	ASTM D5185(m)	1150	999	1075	1042
Zinc	ppm	ASTM D5185(m)	1350	1201	1181	1262
Sulfur	ppm	ASTM D5185(m)	4250	2550	2688	2592
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	8	4	2
Sodium	ppm	ASTM D5185(m)		11	104	2
Potassium	ppm	ASTM D5185(m)	>20	19	27	4
Glycol	%	ASTM D7922*		0.0	0.0	NEG

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.4	0.4	0.3
Nitration	Abs/cm	ASTM D7624*	>20	6.4	8.4	8.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.7	22.0	24.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.3	14.6	14.9











OIL ANALYSIS REPORT

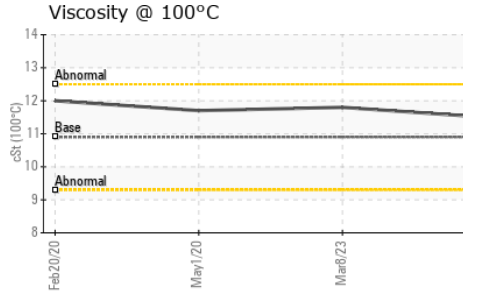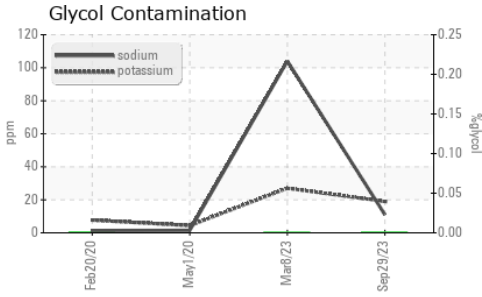

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.5	11.8

GRAPHS

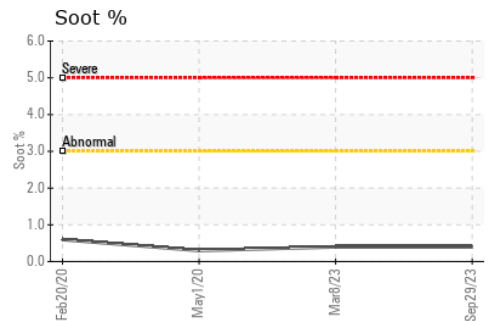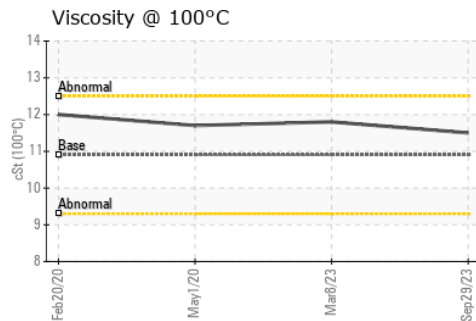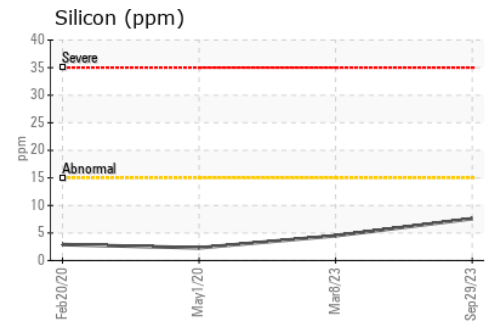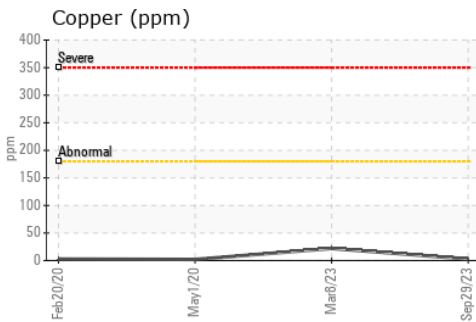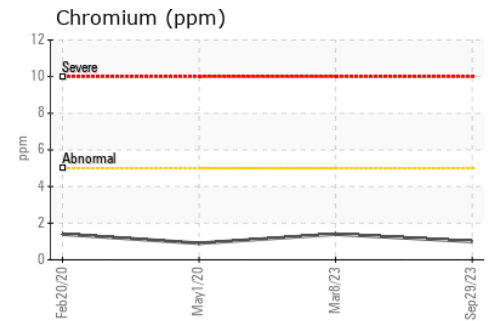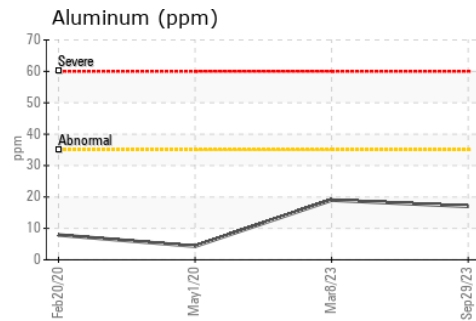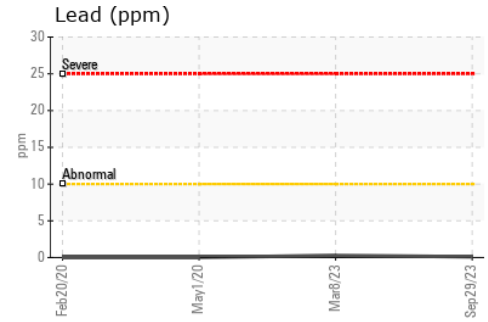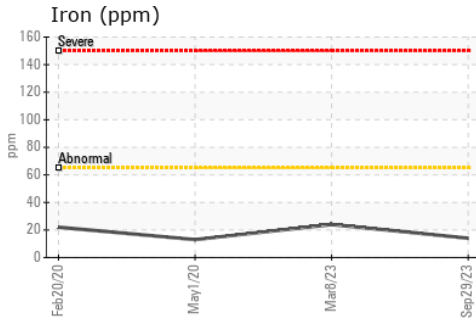

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste
Sample No. : GFL0088888 **Received** : 12 Oct 2023
Lab Number : 02588565 **Diagnosed** : 12 Oct 2023
Unique Number : 5657631 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F: