




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

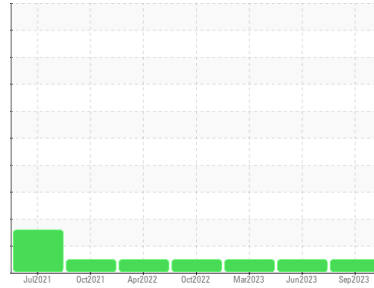

Machine Id
711034
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0088860	GFL0084442	GFL0073473
Sample Date	Client Info		22 Sep 2023	07 Jun 2023	24 Mar 2023
Machine Age	hrs	Client Info	600	101486	4402
Oil Age	hrs	Client Info	600	0	600
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	13	13	14
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	3
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	3	2	3
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	3	2
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	50	62	60	60
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	992	948	971
Calcium	ppm	ASTM D5185(m)	1050	1067	1101	1100
Phosphorus	ppm	ASTM D5185(m)	995	950	1035	1044
Zinc	ppm	ASTM D5185(m)	1180	1184	1161	1180
Sulfur	ppm	ASTM D5185(m)	2600	2173	2291	2367
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	4	3
Sodium	ppm	ASTM D5185(m)		17	10	11
Potassium	ppm	ASTM D5185(m)	>20	6	1	2
Glycol	%	ASTM D7922*		0.0	NEG	NEG

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.5	0.4	0.3
Nitration	Abs/cm	ASTM D7624*	>20	8.9	8.6	9.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.4	20.2	19.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.2	16.3	15.9











OIL ANALYSIS REPORT

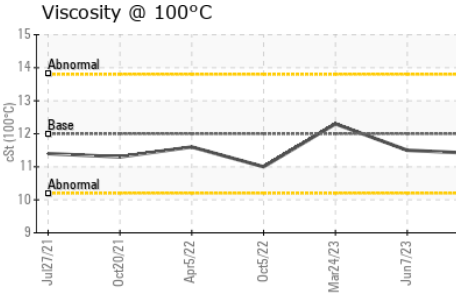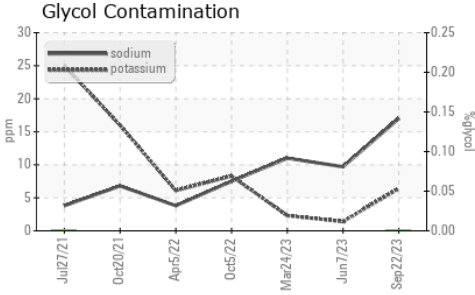

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	12.3

GRAPHS

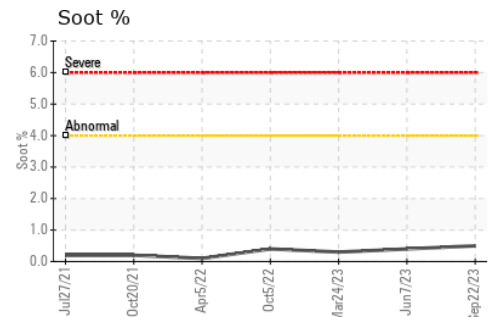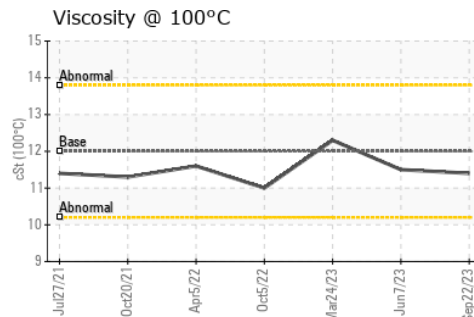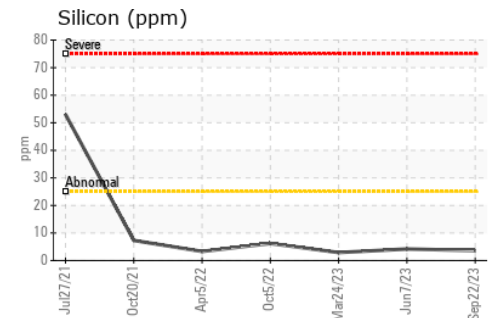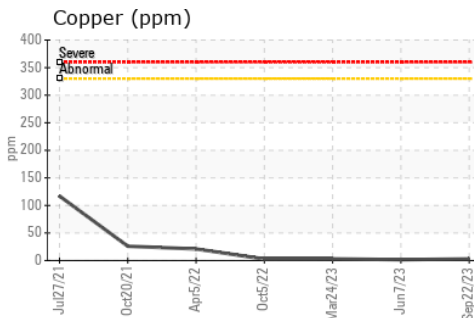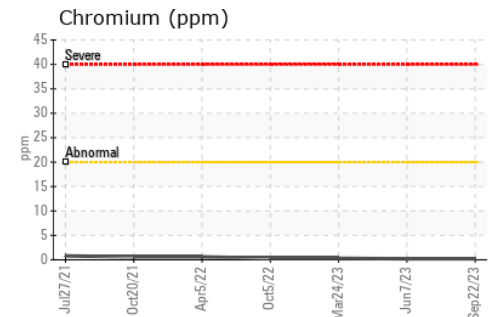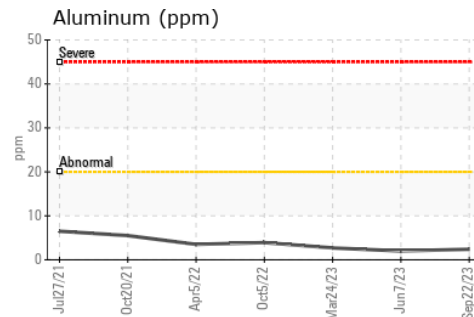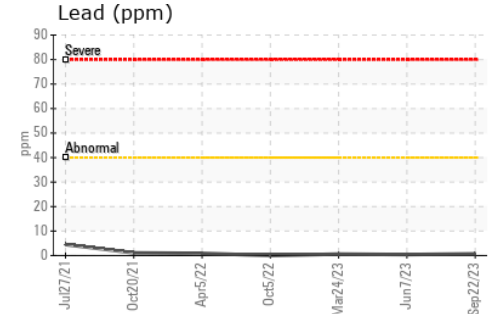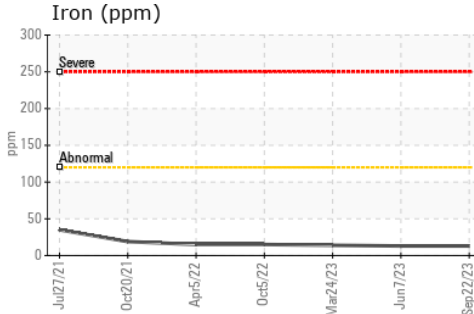

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste
Sample No. : GFL0088860 **Received** : 12 Oct 2023
Lab Number : 02588568 **Diagnosed** : 12 Oct 2023
Unique Number : 5657634 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

4365 boul. St-Elzear Ouest,
 Laval, QC
 CA H7P 4J3
 Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F: