




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**711014**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SAE 10W30 (--- GAL)**

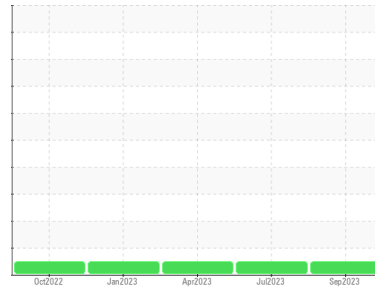

## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Il n'y a aucun indice de contamination dans l'huile.

### Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0088892</b>	GFL0084475	GFL0073376
Sample Date	Client Info		<b>26 Sep 2023</b>	26 Jul 2023	11 Apr 2023
Machine Age	hrs	Client Info	<b>4944</b>	92610	4059
Oil Age	hrs	Client Info	<b>600</b>	0	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>6</b>	11	9
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	2	2
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	1	<b>2</b>	3	2
Barium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	1	<b>59</b>	58	59
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	10	<b>956</b>	974	963
Calcium	ppm	ASTM D5185(m)	2942	<b>1131</b>	1038	1076
Phosphorus	ppm	ASTM D5185(m)	1102	<b>977</b>	1034	1054
Zinc	ppm	ASTM D5185(m)	1351	<b>1174</b>	1183	1154
Sulfur	ppm	ASTM D5185(m)	3903	<b>2480</b>	2284	2487
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	4	7
Sodium	ppm	ASTM D5185(m)		<b>8</b>	4	7
Potassium	ppm	ASTM D5185(m)	>20	<b>7</b>	2	2

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.6</b>	7.9	7.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.9</b>	20.4	19.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.1</b>	15.9	15.0











# OIL ANALYSIS REPORT

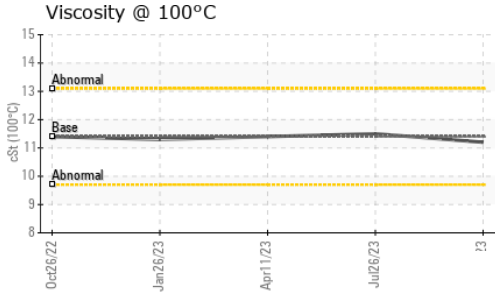

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	<b>11.2</b>	11.5	11.4

## GRAPHS

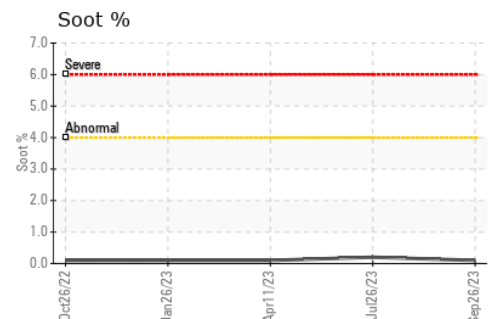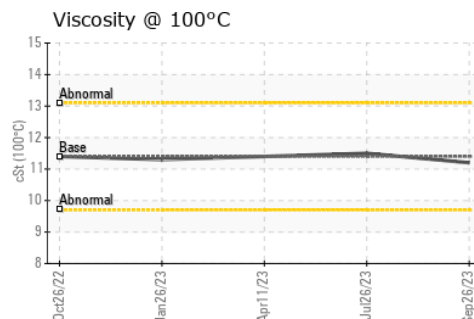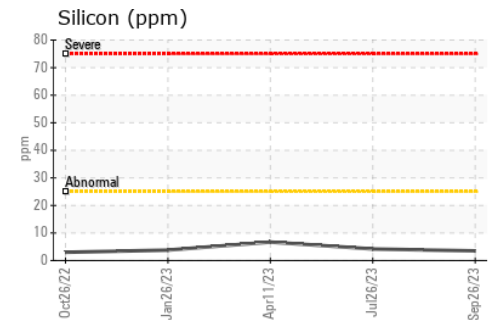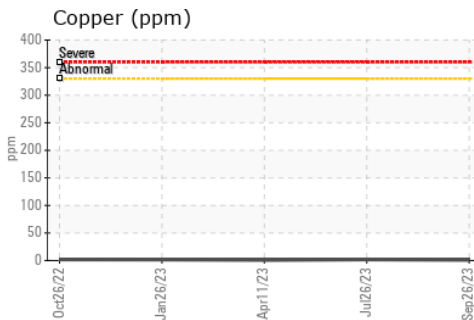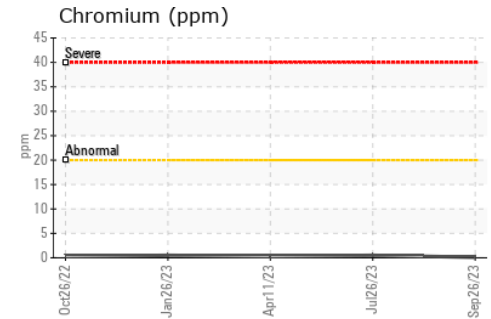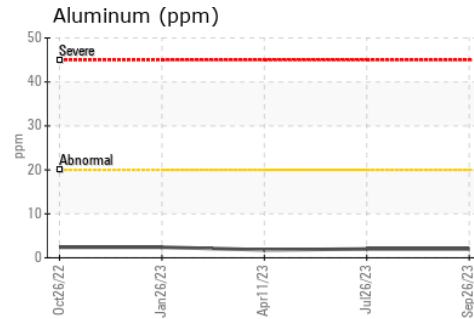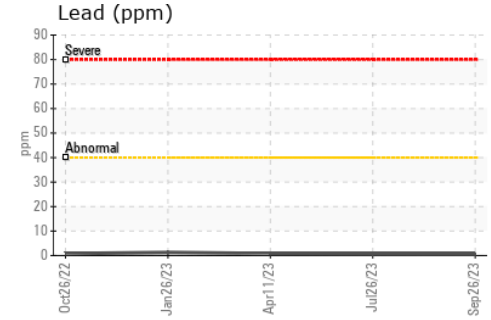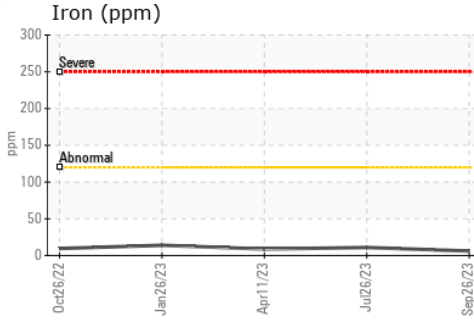

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste  
**Sample No.** : GFL0088892 **Received** : 12 Oct 2023 4365 boul. St-Elzear Ouest, Laval, QC  
**Lab Number** : 02588569 **Diagnosed** : 12 Oct 2023 CA H7P 4J3  
**Unique Number** : 5657635 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Pieces Laval  
 pieces.laval@gflenv.com  
 T: (450)687-3838  
 F: