




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

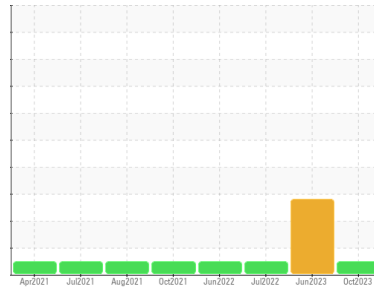

Machine Id
501138
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0093887	GFL0085937	GFL0054176
Sample Date	Client Info		06 Oct 2023	08 Jun 2023	18 Jul 2022
Machine Age	hrs	Client Info	13400	12540	0
Oil Age	hrs	Client Info	0	200	0
Oil Changed	Client Info		N/A	Not Changd	Changed
Sample Status			NORMAL	SEVERE	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	0.0	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	10	9	10
Chromium	ppm	ASTM D5185(m) >20	0	<1	0
Nickel	ppm	ASTM D5185(m) >5	0	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	<1	<1	0
Aluminum	ppm	ASTM D5185(m) >20	1	1	2
Lead	ppm	ASTM D5185(m) >40	<1	<1	<1
Copper	ppm	ASTM D5185(m) >330	2	3	2
Tin	ppm	ASTM D5185(m) >15	0	0	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	2	1	1
Barium	ppm	ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 50	59	47	58
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	971	745	970
Calcium	ppm	ASTM D5185(m) 1050	1053	795	1087
Phosphorus	ppm	ASTM D5185(m) 995	984	829	987
Zinc	ppm	ASTM D5185(m) 1180	1182	908	1214
Sulfur	ppm	ASTM D5185(m) 2600	2501	2065	2610
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	3	5
Sodium	ppm	ASTM D5185(m)	6	29	12
Potassium	ppm	ASTM D5185(m) >20	1	12	2
Fuel	%	ASTM D7593* >3.0	0.9	19.5	<1.0

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0	0	0.1
Nitration	Abs/cm	ASTM D7624* >20	7.0	5.6	7.7
Sulfation	Abs/.1mm	ASTM D7415* >30	19.3	20.0	20.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	15.7	19.0	16.8











OIL ANALYSIS REPORT

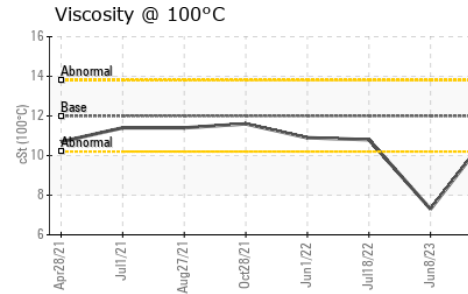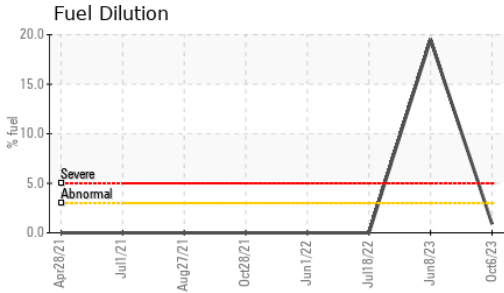

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	7.3

GRAPHS

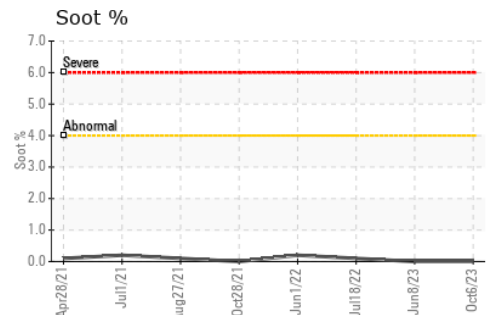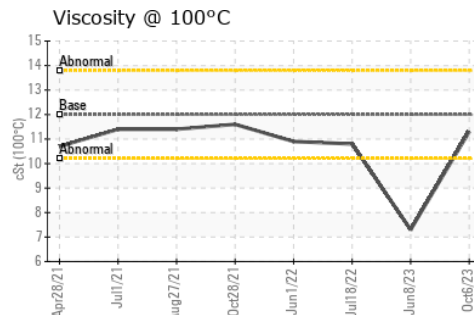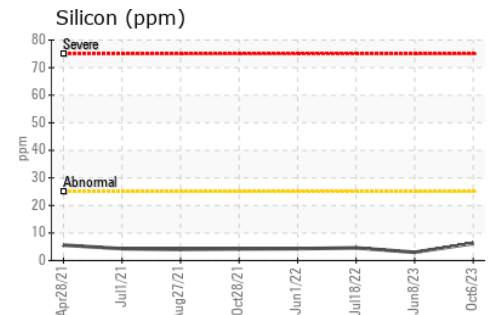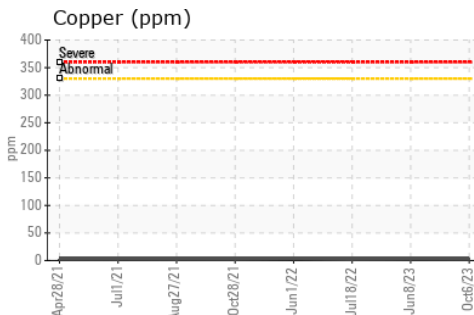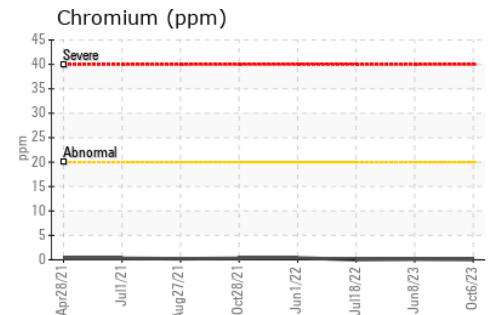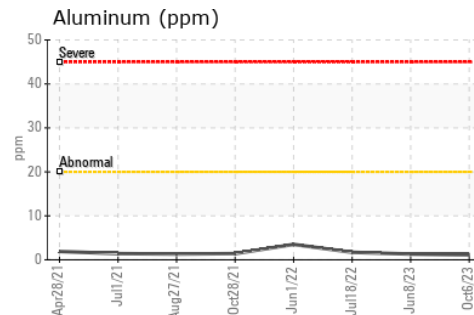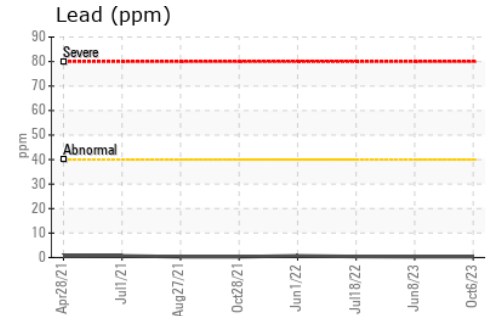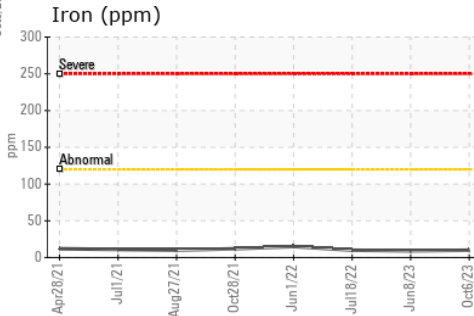

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0093887 **Received** : 17 Oct 2023
Lab Number : 02589501 **Diagnosed** : 18 Oct 2023
Unique Number : 5658567 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tim Greig
 tgreig@gflenv.com

T:
F: