


Area
Cranes [450207986]
 Machine Id
Crane - Mid Ship Distribution Gearbox (S/N Sample Tag MA-04002-S11)
 Component
Gearbox
 Fluid
PETRO CANADA TRAXON 80W90 (6 LTR)

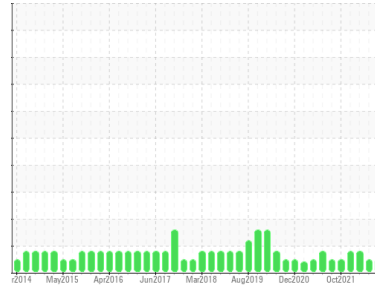

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info	PC0076230	PC0040543	PC0052192
Sample Date	Client Info	04 Oct 2023	12 Aug 2023	14 Jun 2023
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	ABNORMAL

WEAR METALS method limit/base current history1 history2

PQ	ASTM D8184*		0	0	0
Iron	ppm ASTM D5185(m)	>150	4	4	8
Chromium	ppm ASTM D5185(m)	>10	0	0	0
Nickel	ppm ASTM D5185(m)	>10	<1	<1	0
Titanium	ppm ASTM D5185(m)		0	0	0
Silver	ppm ASTM D5185(m)		<1	0	0
Aluminum	ppm ASTM D5185(m)	>5	0	0	<1
Lead	ppm ASTM D5185(m)	>65	<1	0	<1
Copper	ppm ASTM D5185(m)	>80	<1	<1	<1
Tin	ppm ASTM D5185(m)	>8	0	0	0
Antimony	ppm ASTM D5185(m)	>5	0	0	0
Vanadium	ppm ASTM D5185(m)		0	0	0
Beryllium	ppm ASTM D5185(m)		0	0	0
Cadmium	ppm ASTM D5185(m)		0	0	0

ADDITIVES method limit/base current history1 history2

Boron	ppm ASTM D5185(m)	243	253	251	210
Barium	ppm ASTM D5185(m)	1	<1	<1	2
Molybdenum	ppm ASTM D5185(m)		0	0	0
Manganese	ppm ASTM D5185(m)		0	0	0
Magnesium	ppm ASTM D5185(m)	2	<1	<1	1
Calcium	ppm ASTM D5185(m)	6	7	6	15
Phosphorus	ppm ASTM D5185(m)	987	924	1071	865
Zinc	ppm ASTM D5185(m)	1	18	16	42
Sulfur	ppm ASTM D5185(m)	21530	16367	17824	16443
Lithium	ppm ASTM D5185(m)		<1	<1	<1






CONTAMINANTS method limit/base current history1 history2

Silicon	ppm ASTM D5185(m)	>20	3	3	2
Sodium	ppm ASTM D5185(m)		<1	<1	<1
Potassium	ppm ASTM D5185(m)	>20	0	<1	<1

FLUID CLEANLINESS method limit/base current history1 history2

Particles >4µm	ASTM D7647	>20000	44087	50363	58245
Particles >6µm	ASTM D7647	>5000	4424	7242	5889
Particles >14µm	ASTM D7647	>640	124	444	109
Particles >21µm	ASTM D7647	>160	26	130	35
Particles >38µm	ASTM D7647	>40	3	9	2
Particles >71µm	ASTM D7647	>10	2	5	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	23/19/14	23/20/16	23/20/14

OIL ANALYSIS REPORT

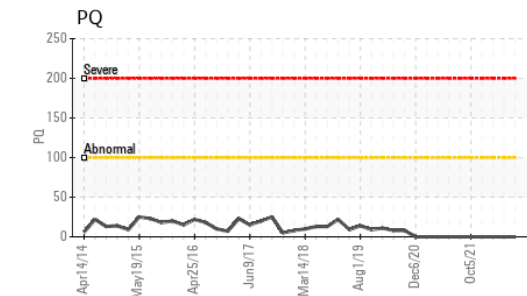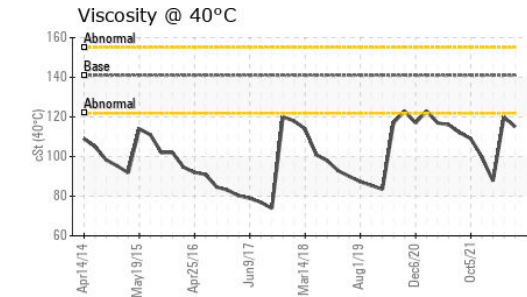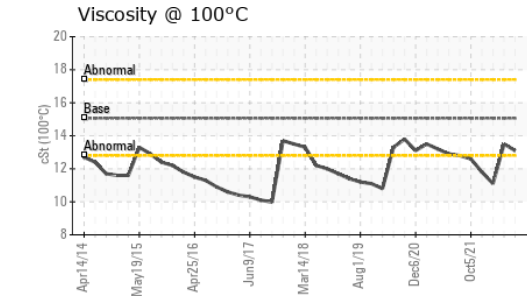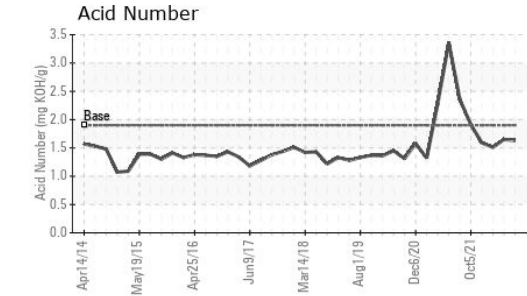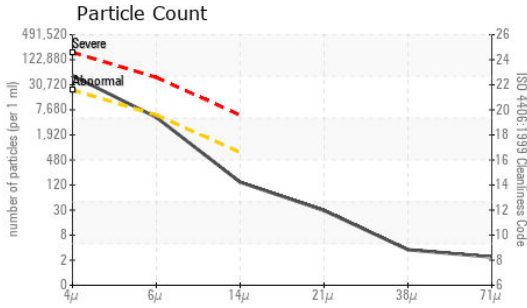


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.9	1.63	1.65	1.51

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	115	120	▲ 87.7
Visc @ 100°C	cSt	ASTM D7279(m)	15.06	13.1	13.5	▲ 11.1
Viscosity Index (VI)	Scale	ASTM D2270*	108	108	108	113

SAMPLE IMAGES

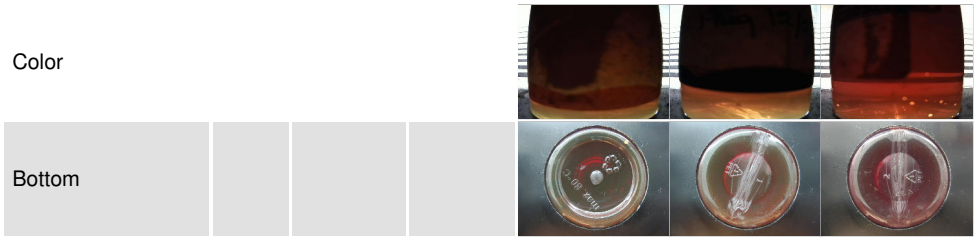

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0076230
Lab Number : **02590124**
Unique Number : 5659190
Test Package : MAR 2 (Additional Tests: KV100, PQ, PrtCount, TAN Man, VI)

Received : 18 Oct 2023
Diagnosed : 19 Oct 2023
Diagnostician : Kevin Marson

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Strret
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.