


Area  
**Cranes [450207986]**  
Machine Id  
**Crane - Mid Ship Slewing Gearbox #1 (S/N Sample Tag MA-04002-S7)**  
Component  
**Gearbox**  
Fluid  
**PETRO CANADA GEARLUBE TOS 80W90 (33 LTR)**

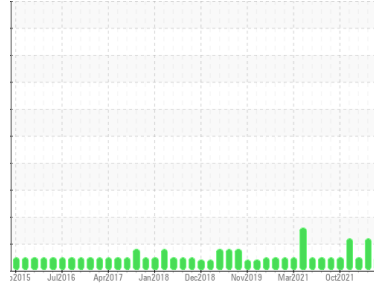

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

|               |             |                    |             |             |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>PC0076228</b>   | PC0061639   | PC0052200   |
| Sample Date   | Client Info | <b>04 Oct 2023</b> | 12 Aug 2023 | 14 Jun 2023 |
| Machine Age   | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Age       | hrs         | Client Info        | <b>0</b>    | 0           |
| Oil Changed   | Client Info | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             | <b>NORMAL</b>      | ATTENTION   | NORMAL      |

**WEAR METALS** method limit/base current history1 history2

|           |             |                    |              |    |    |
|-----------|-------------|--------------------|--------------|----|----|
| PQ        | ASTM D8184* |                    | <b>0</b>     | 0  | 0  |
| Iron      | ppm         | ASTM D5185(m) >150 | <b>&lt;1</b> | 3  | 2  |
| Chromium  | ppm         | ASTM D5185(m) >10  | <b>0</b>     | 0  | 0  |
| Nickel    | ppm         | ASTM D5185(m) >10  | <b>0</b>     | 0  | 0  |
| Titanium  | ppm         | ASTM D5185(m)      | <b>0</b>     | 0  | 0  |
| Silver    | ppm         | ASTM D5185(m)      | <b>&lt;1</b> | <1 | <1 |
| Aluminum  | ppm         | ASTM D5185(m) >5   | <b>0</b>     | 0  | <1 |
| Lead      | ppm         | ASTM D5185(m) >65  | <b>0</b>     | 0  | 0  |
| Copper    | ppm         | ASTM D5185(m) >80  | <b>&lt;1</b> | <1 | <1 |
| Tin       | ppm         | ASTM D5185(m) >8   | <b>0</b>     | 0  | 0  |
| Antimony  | ppm         | ASTM D5185(m) >5   | <b>0</b>     | 0  | 0  |
| Vanadium  | ppm         | ASTM D5185(m)      | <b>0</b>     | 0  | 0  |
| Beryllium | ppm         | ASTM D5185(m)      | <b>0</b>     | 0  | 0  |
| Cadmium   | ppm         | ASTM D5185(m)      | <b>0</b>     | 0  | 0  |

**ADDITIVES** method limit/base current history1 history2

|            |     |                     |              |       |       |
|------------|-----|---------------------|--------------|-------|-------|
| Boron      | ppm | ASTM D5185(m) 240   | <b>267</b>   | 253   | 252   |
| Barium     | ppm | ASTM D5185(m) 1     | <b>&lt;1</b> | <1    | <1    |
| Molybdenum | ppm | ASTM D5185(m) 0.0   | <b>0</b>     | 0     | 0     |
| Manganese  | ppm | ASTM D5185(m)       | <b>0</b>     | 0     | 0     |
| Magnesium  | ppm | ASTM D5185(m) 2     | <b>&lt;1</b> | <1    | 1     |
| Calcium    | ppm | ASTM D5185(m) 6     | <b>3</b>     | 26    | 26    |
| Phosphorus | ppm | ASTM D5185(m) 1000  | <b>976</b>   | 1093  | 1035  |
| Zinc       | ppm | ASTM D5185(m) 3     | <b>3</b>     | 19    | 11    |
| Sulfur     | ppm | ASTM D5185(m) 19400 | <b>17429</b> | 22115 | 21560 |
| Lithium    | ppm | ASTM D5185(m)       | <b>&lt;1</b> | <1    | <1    |






**CONTAMINANTS** method limit/base current history1 history2

|           |     |                   |              |    |    |
|-----------|-----|-------------------|--------------|----|----|
| Silicon   | ppm | ASTM D5185(m) >20 | <b>4</b>     | 4  | 3  |
| Sodium    | ppm | ASTM D5185(m)     | <b>&lt;1</b> | <1 | <1 |
| Potassium | ppm | ASTM D5185(m) >20 | <b>0</b>     | <1 | <1 |

**FLUID CLEANLINESS** method limit/base current history1 history2

|                 |              |           |                 |            |          |
|-----------------|--------------|-----------|-----------------|------------|----------|
| Particles >4µm  | ASTM D7647   | >20000    | <b>65427</b>    | 84298      | 27236    |
| Particles >6µm  | ASTM D7647   | >5000     | <b>12838</b>    | 23554      | 3855     |
| Particles >14µm | ASTM D7647   | >640      | <b>192</b>      | ▲ 1030     | 41       |
| Particles >21µm | ASTM D7647   | >160      | <b>34</b>       | ▲ 232      | 8        |
| Particles >38µm | ASTM D7647   | >40       | <b>5</b>        | 5          | 0        |
| Particles >71µm | ASTM D7647   | >10       | <b>4</b>        | 1          | 0        |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | <b>23/21/15</b> | ▲ 24/22/17 | 22/19/13 |

# OIL ANALYSIS REPORT

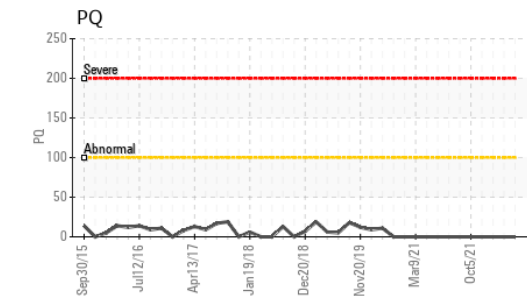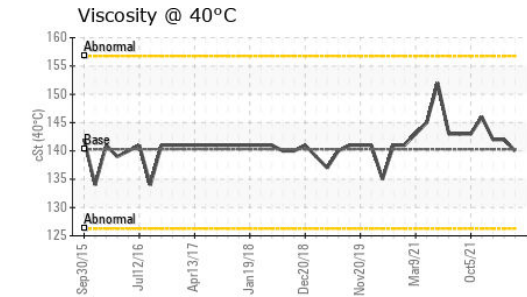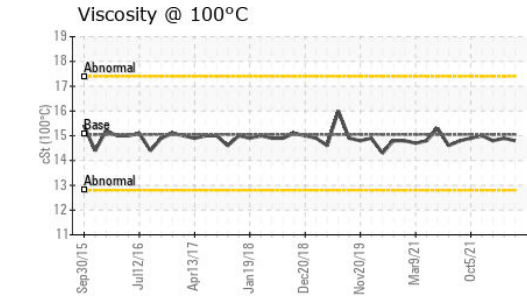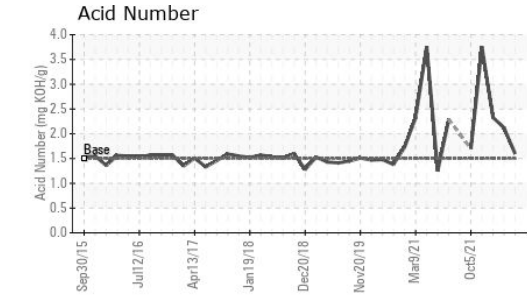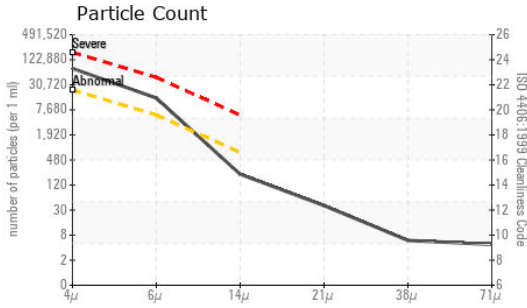

## FLUID DEGRADATION

| method                    | limit/base | current | history1    | history2 |      |
|---------------------------|------------|---------|-------------|----------|------|
| Acid Number (AN) mg KOH/g | ASTM D974* | 1.5     | <b>1.60</b> | 2.12     | 2.33 |


## VISUAL

| method           | limit/base     | current | history1     | history2 |       |
|------------------|----------------|---------|--------------|----------|-------|
| White Metal      | scalar Visual* | NONE    | <b>NONE</b>  | VLITE    | NONE  |
| Yellow Metal     | scalar Visual* | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar Visual* | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar Visual* | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Debris           | scalar Visual* | NONE    | <b>NONE</b>  | VLITE    | NONE  |
| Sand/Dirt        | scalar Visual* | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar Visual* | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar Visual* | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar Visual* | >0.2    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar Visual* |         | <b>NEG</b>   | NEG      | NEG   |

## FLUID PROPERTIES

| method               | limit/base        | current | history1    | history2 |      |
|----------------------|-------------------|---------|-------------|----------|------|
| Visc @ 40°C          | cSt ASTM D7279(m) | 140.3   | <b>140</b>  | 142      | 142  |
| Visc @ 100°C         | cSt ASTM D7279(m) | 15.05   | <b>14.8</b> | 14.9     | 14.8 |
| Viscosity Index (VI) | Scale ASTM D2270* | 109     | <b>105</b>  | 105      | 104  |

## SAMPLE IMAGES

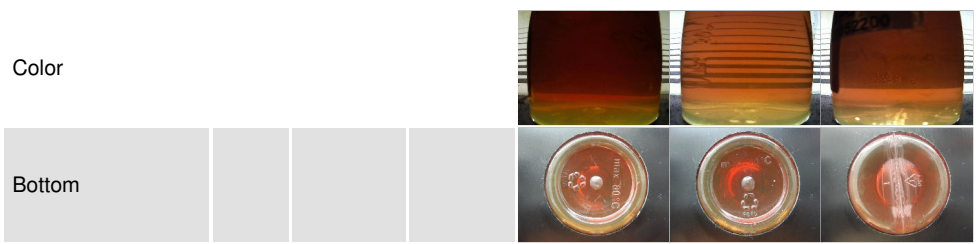

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0076228  
**Lab Number** : **02590131**  
**Unique Number** : 5659197  
**Test Package** : MAR 2 ( Additional Tests: KV100, PQ, PrtCount, TAN Man, VI )

**Suncor - Terra Nova Projects**  
 Scotia Centre, 235 Water Strret  
 St. John's, NL  
 CA A1C 1B6  
 Contact: Josh Hynes  
 joshynes@suncor.com  
 T: (709)778-3575  
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.