


PROBLEM SUMMARY


Area
1420
Machine Id
1420-5671-4005 - BALL MILL TRUNNION/PINION LUBE
Component
Bulk Fluid Tank
Fluid
PETRO CANADA ENDURATEX EP 320 (1000 LTR)

Sample Rating Trend

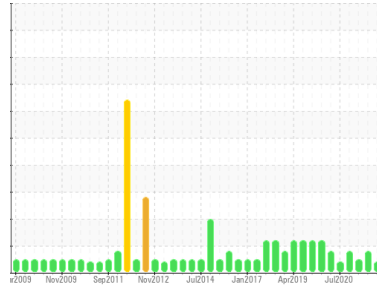

COMPONENT CONDITION SUMMARY

▲ Particle Trend

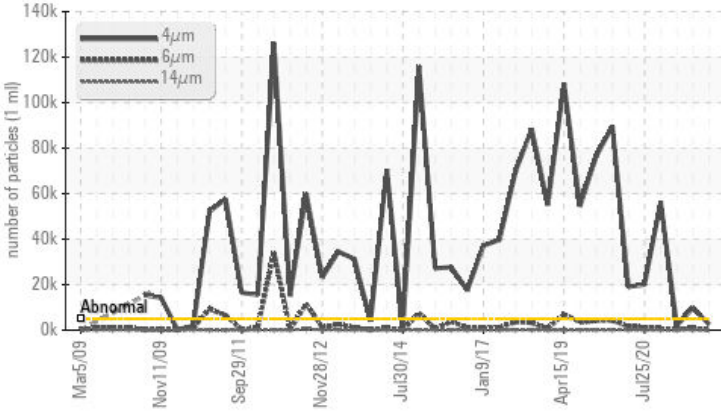

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	ATTENTION	NORMAL
Particles >71µm	ASTM D7647 >3	▲ 10	1	0

Customer Id: INCVOS
Sample No.: PC0070104
Lab Number: 02590401
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

02 Sep 2023 Diag: Wes Davis

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



21 Nov 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



11 Apr 2021 Diag: Wes Davis

ISO




Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. All component wear rates are normal. Particles >4µm are severely high. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Area
1420
Machine Id
1420-5671-4005 - BALL MILL TRUNNION/PINION LUBE
Component
Bulk Fluid Tank
Fluid
PETRO CANADA ENDURATEX EP 320 (1000 LTR)

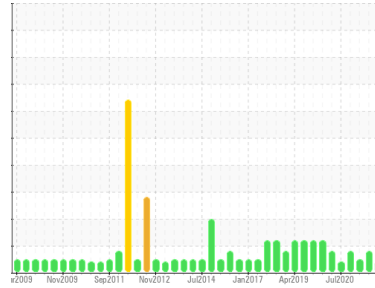

DIAGNOSIS

Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0070104	PC0070130	PC0057449
Sample Date	Client Info	07 Oct 2023	02 Sep 2023	21 Nov 2022
Machine Age	mths Client Info	0	0	0
Oil Age	mths Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	ATTENTION	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m)	<1	<1	<1
Chromium	ppm ASTM D5185(m)	0	0	0
Nickel	ppm ASTM D5185(m)	<1	0	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	<1	0	0
Aluminum	ppm ASTM D5185(m)	0	<1	0
Lead	ppm ASTM D5185(m)	0	0	0
Copper	ppm ASTM D5185(m)	2	2	2
Tin	ppm ASTM D5185(m)	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 55	52	49	53
Barium	ppm ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm ASTM D5185(m) 0	0	<1	0
Manganese	ppm ASTM D5185(m) 0	0	0	0
Magnesium	ppm ASTM D5185(m) 0	<1	<1	0
Calcium	ppm ASTM D5185(m) 0	1	1	0
Phosphorus	ppm ASTM D5185(m) 240	245	258	275
Zinc	ppm ASTM D5185(m) 1	5	6	4
Sulfur	ppm ASTM D5185(m) 13700	6081	6259	7187
Lithium	ppm ASTM D5185(m)	4	4	5

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m)	2	1	1
Sodium	ppm ASTM D5185(m)	2	2	1
Potassium	ppm ASTM D5185(m) >20	<1	<1	1


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	2582	▲ 9799	1932
Particles >6µm	ASTM D7647 >1300	246	769	505
Particles >14µm	ASTM D7647 >160	24	60	31
Particles >21µm	ASTM D7647 >40	15	19	8
Particles >38µm	ASTM D7647 >10	11	2	0
Particles >71µm	ASTM D7647 >3	▲ 10	1	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	19/15/12	▲ 20/17/13	18/16/12


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.4	0.39	0.32	0.43


▲ Particle Trend

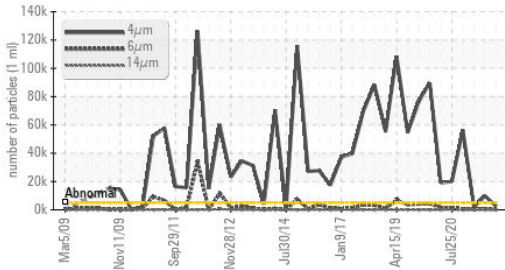


Viscosity @ 100°C

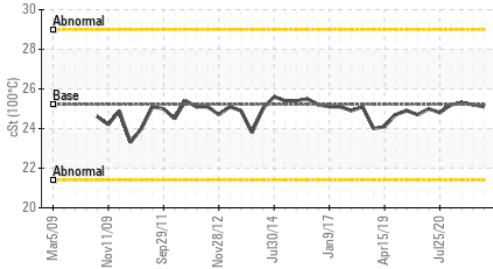


Acid Number

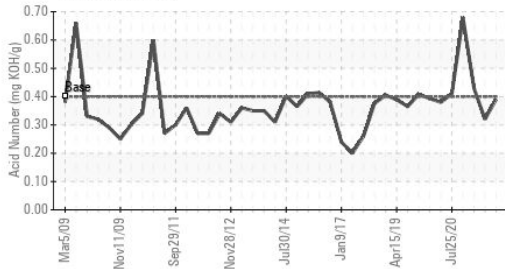

Viscosity @ 100°C

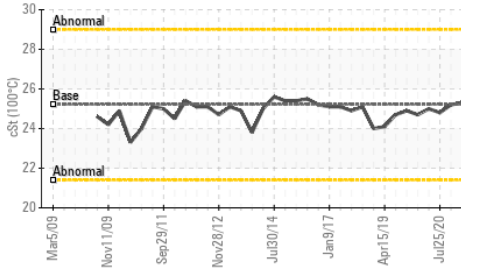


Viscosity @ 40°C

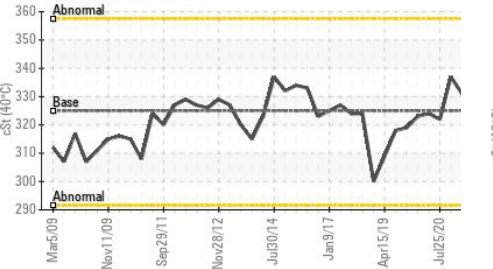

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	NEG	NEG	NEG
Free Water	scalar	Visual*	NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	325	328	331
Visc @ 100°C	cSt	ASTM D7279(m)	25.22	25.1	25.3
Viscosity Index (VI)	Scale	ASTM D2270*	100	98	99

SAMPLE IMAGES

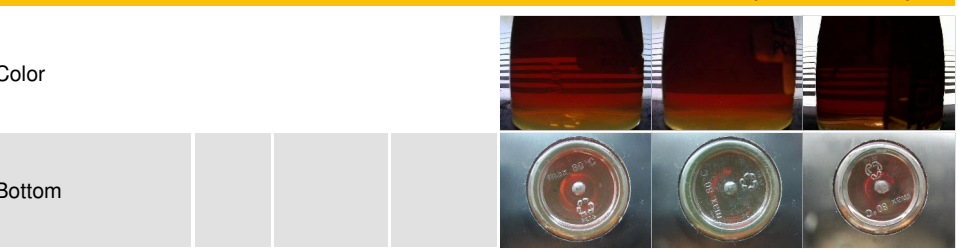


GRAPHS


Ferrous Alloys

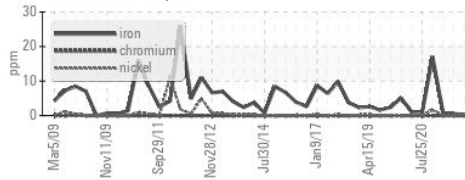


Non-ferrous Metals

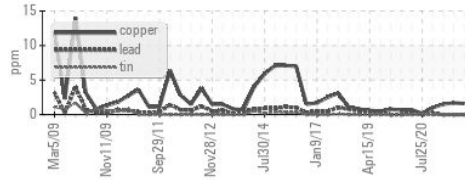


Viscosity @ 40°C

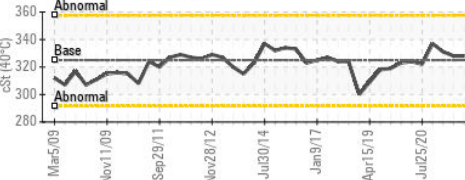

▲ Particle Count

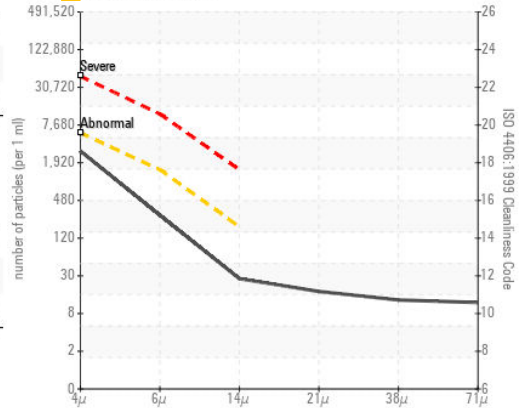

Acid Number

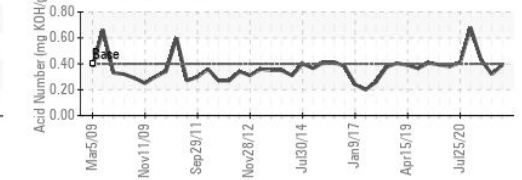

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0070104
Lab Number : 02590401
Unique Number : 5659467
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

Vale - Voisey's Bay
 Voisey's Bay Mine Site, P.O. Box 7001, Stn. C Happy Valley
 Goose Bay, NL
 CA A0P 1C0
 Contact: Robert Feltham
 robert.feltham@vale.com

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*

T:
F: x