


OIL ANALYSIS REPORT









NO UNIT GFL0093795

Component **Diesel Engine**

DIESEL ENGINE OIL S

DIAGNOSIS Recommendation

Resample at the next service interval to monitor.

The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The condition of the oil is acceptable for the time in service.

AE 40 (GAL)			Oct2023		
SAMPLE INFO	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0093795		
Sample Date		Client Info		02 Oct 2023		
Machine Age	kms	Client Info		590888		
Dil Age	kms	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
-uel		WC Method	>3.0	<1.0		
WEAR META	LS	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185(m)	>120	7		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>5	<1		
Titanium	ppm	ASTM D5185(m)	>2	0		
Silver	ppm	ASTM D5185(m)	>2	<1		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
_ead	ppm	ASTM D5185(m)	>40	2		
Copper	ppm	ASTM D5185(m)	>330	<1		
īin	ppm	ASTM D5185(m)	>15	0		
Antimony	ppm	ASTM D5185(m)		0		
/anadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	4		
Barium	ppm	ASTM D5185(m)	10	<1		
Molybdenum	ppm	ASTM D5185(m)	100	59		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	450	935		
Calcium	ppm	ASTM D5185(m)	3000	1024		
Phosphorus	ppm	ASTM D5185(m)	1150	984		
Zinc	ppm	ASTM D5185(m)	1350	1157		
Sulfur	ppm	ASTM D5185(m)	4250	2475		
_ithium	ppm	ASTM D5185(m)		<1		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3		
Sodium	ppm	ASTM D5185(m)	>216	3		
Potassium	ppm	ASTM D5185(m)	>20	8		
Glycol	%	ASTM D7922*		0.0		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>4	0		
Vitration	Abs/cm	ASTM D7624*	>20	7.8		
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.6		
FLUID DEGRA	ADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.1		



OIL ANALYSIS REPORT

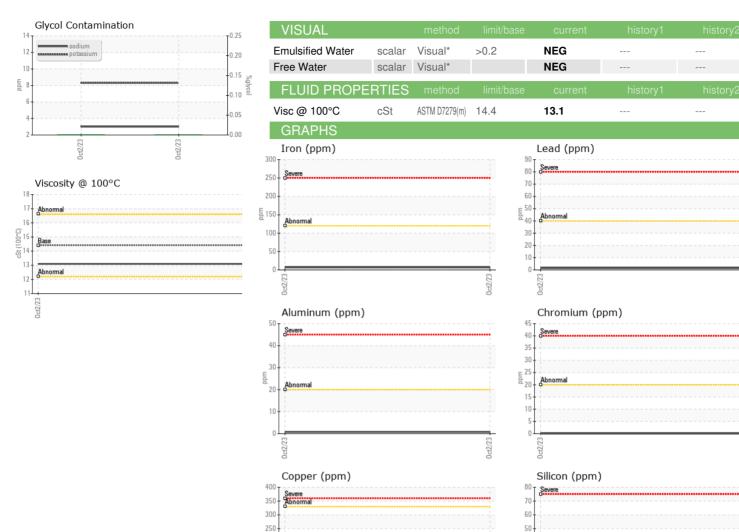





Laboratory Sample No. Lab Number Unique Number

150 100

cSt (100°C)

: GFL0093795 : 02590512

Test Package : MOB 1 (Additional Tests: Glycol)

Viscosity @ 100°C

Received : 5659578

: 20 Oct 2023 Diagnosed Diagnostician : Wes Davis

: 20 Oct 2023

E 40

6.0 5.0

2.0

0.0

Soot %

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 252 - GTA Hauling 3668 Weston Road North York, ON CA M9L 1W2 Contact: Tom Hatzioannidis

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

thatzioannidis@gflenv.com T: (416)406-2040