




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

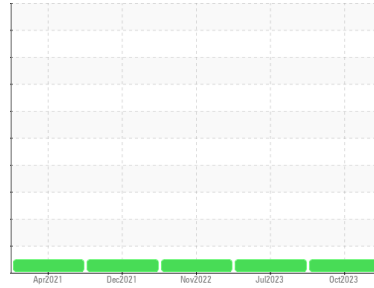

Area
GFL252
 Machine Id
525058

Component
Diesel Engine
 Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0099660	GFL0089258	GFL0061857
Sample Date	Client Info			05 Oct 2023	18 Jul 2023	29 Nov 2022
Machine Age	kms	Client Info		798620	780587	143694
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	11	13	14
Chromium	ppm	ASTM D5185(m)	>6	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>3	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>50	2	3	7
Lead	ppm	ASTM D5185(m)	>10	<1	0	0
Copper	ppm	ASTM D5185(m)	>50	2	2	1
Tin	ppm	ASTM D5185(m)	>6	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	4	17	110
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	60	64	72	126
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	987	940	658
Calcium	ppm	ASTM D5185(m)	1070	1072	1142	1574
Phosphorus	ppm	ASTM D5185(m)	1150	999	993	705
Zinc	ppm	ASTM D5185(m)	1270	1219	1134	773
Sulfur	ppm	ASTM D5185(m)	2060	2385	2365	1985
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	5	4	6
Sodium	ppm	ASTM D5185(m)		3	2	2
Potassium	ppm	ASTM D5185(m)	>20	0	1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.7	0.7	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.4	9.8	11.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.3	22.5	27.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.8	17.8	22.7











OIL ANALYSIS REPORT

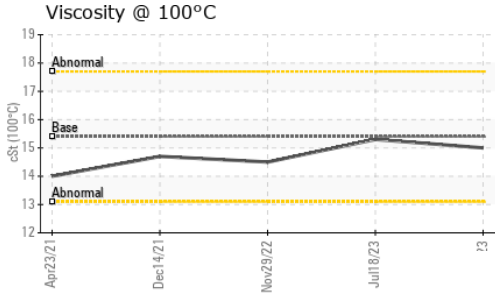

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	15.3	14.5

GRAPHS

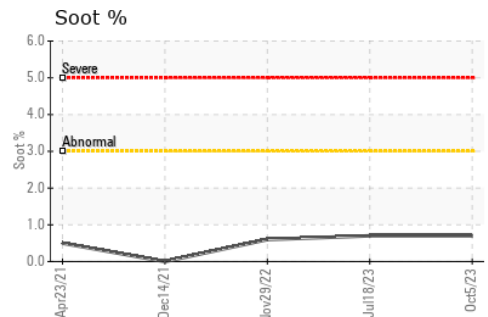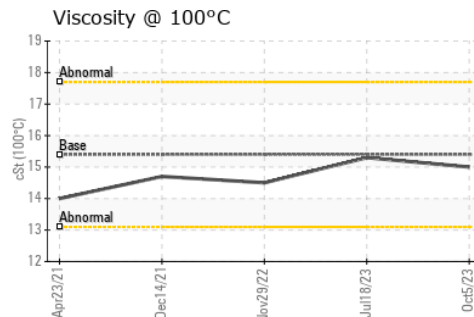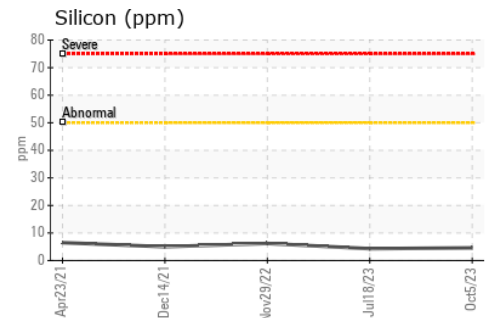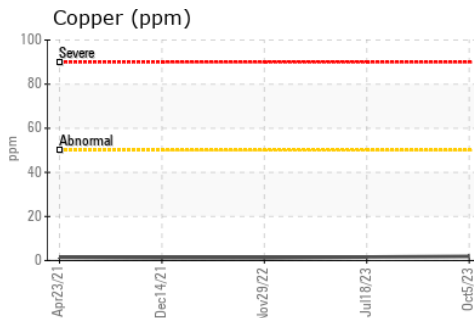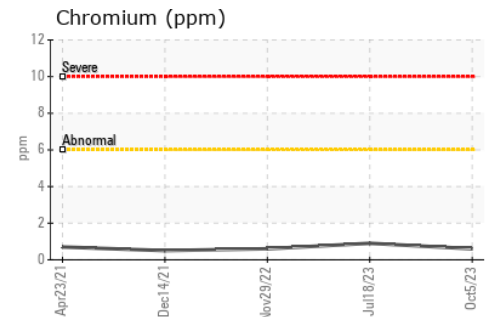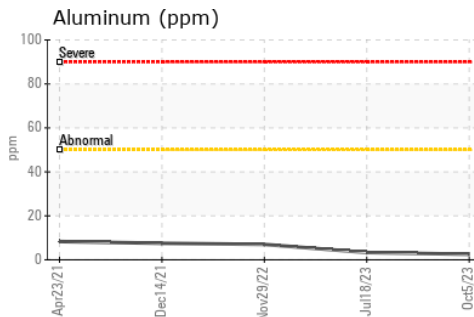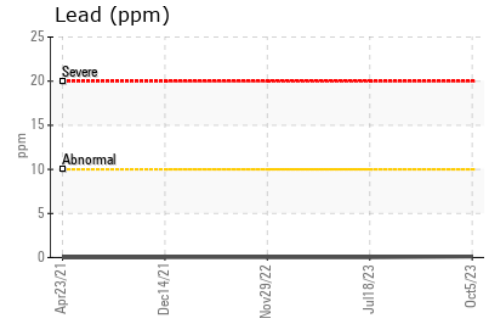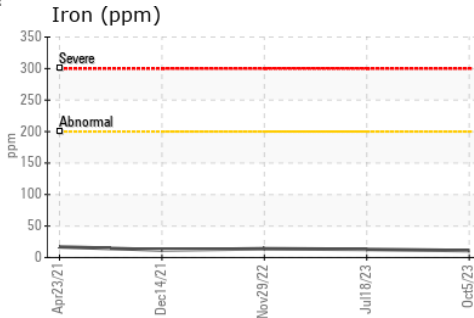

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0099660 **Received** : 20 Oct 2023
Lab Number : 02590519 **Diagnosed** : 20 Oct 2023
Unique Number : 5659585 **Diagnostician** : Kevin Marson
Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road, Building B
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.