


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

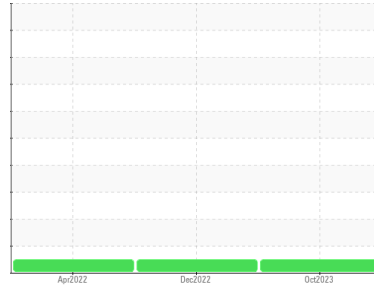

Machine Id
1626

Component
Rear Center Transmission (Auto)

Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (24 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0062036	PC0052620	PC0025032
Sample Date	Client Info		04 Oct 2023	16 Dec 2022	01 Apr 2022
Machine Age	kms	Client Info	449551	397960	349997
Oil Age	kms	Client Info	51160	47755	48828
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
PQ	ASTM D8184*	>150	0	0	---	
Iron	ppm	ASTM D5185(m)	>325	9	21	44
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>2	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>3	0	0	0
Silver	ppm	ASTM D5185(m)	>5	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>75	2	4	8
Lead	ppm	ASTM D5185(m)	>40	<1	<1	1
Copper	ppm	ASTM D5185(m)	>50	4	4	11
Tin	ppm	ASTM D5185(m)	>10	0	<1	1
Antimony	ppm	ASTM D5185(m)	>3	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	78	66	61	49
Barium	ppm	ASTM D5185(m)		<1	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	1
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	2	<1	0
Calcium	ppm	ASTM D5185(m)	113	134	86	12
Phosphorus	ppm	ASTM D5185(m)	222	208	230	199
Zinc	ppm	ASTM D5185(m)		9	5	9
Sulfur	ppm	ASTM D5185(m)	1326	1500	1908	2820
Lithium	ppm	ASTM D5185(m)		<1	<1	<1





CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	3	2	4
Sodium	ppm	ASTM D5185(m)		4	8	26
Potassium	ppm	ASTM D5185(m)	>20	0	<1	2

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	1.4	1.05	1.14	---


OIL ANALYSIS REPORT

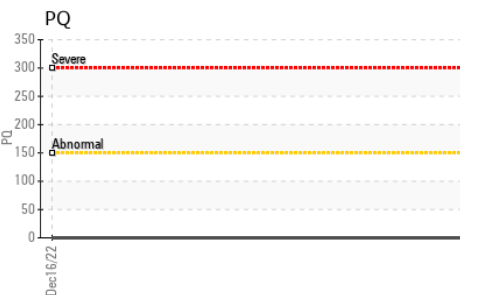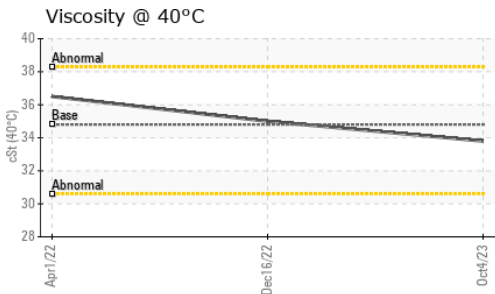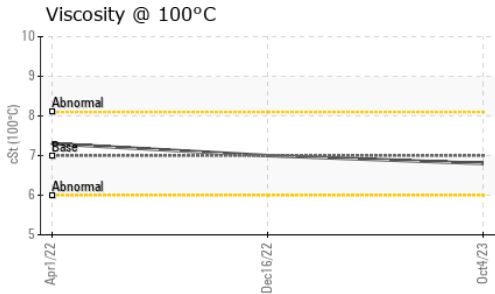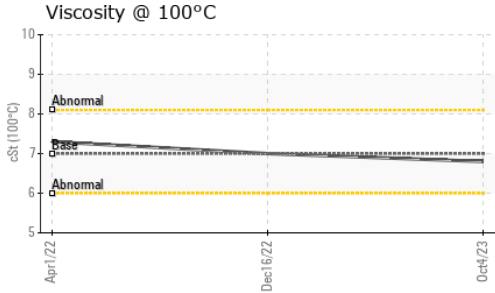





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D2729(m)	34.8	33.8	35.0
Visc @ 100°C	cSt	ASTM D2729(m)	7.0	6.8	7
Viscosity Index (VI)	Scale	ASTM D2270*	167	164	166

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

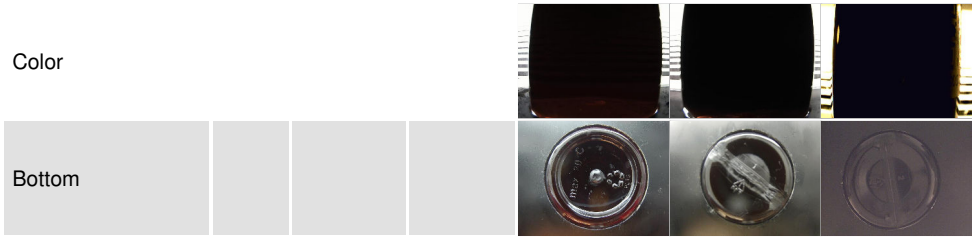

GRAPHS

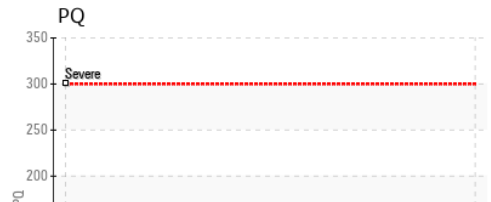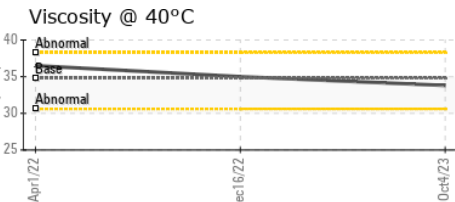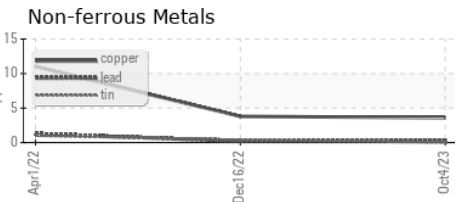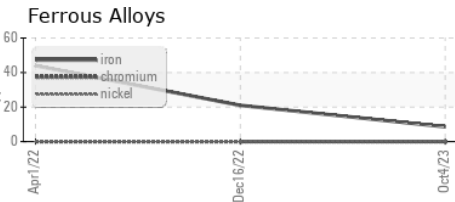

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0062036 **Received** : 20 Oct 2023
Lab Number : 02590686 **Diagnosed** : 23 Oct 2023
Unique Number : 5659752 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, VI)

Metrobus Transit
 25 Messenger Drive
 St. John's, NL
 CA A1B 0H6
 Contact: Dan Finlay
 dan.finlay@metrobus.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.