




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**411005**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

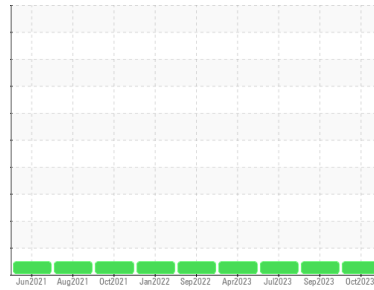

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0042862</b>	GFL0094453	GFL0086768
Sample Date	Client Info		<b>20 Oct 2023</b>	18 Sep 2023	06 Jul 2023
Machine Age	hrs	Client Info	<b>0</b>	24752	24752
Oil Age	hrs	Client Info	<b>0</b>	24752	24752
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.9	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	<b>6</b>	7	8
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m) >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >20	<b>3</b>	3	2
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m) >330	<b>2</b>	1	2
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>29</b>	24	13
Barium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 60	<b>88</b>	75	39
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	<b>59</b>	56	22
Calcium	ppm	ASTM D5185(m) 1070	<b>2176</b>	2142	2307
Phosphorus	ppm	ASTM D5185(m) 1150	<b>992</b>	1049	1004
Zinc	ppm	ASTM D5185(m) 1270	<b>1165</b>	1151	1115
Sulfur	ppm	ASTM D5185(m) 2060	<b>3007</b>	3035	3063
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>3</b>	5	3
Sodium	ppm	ASTM D5185(m)	<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	1	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	ASTM D7624* >20	<b>9.5</b>	9.5	9.0
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>19.6</b>	19.9	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>15.2</b>	14.6	14.0



# OIL ANALYSIS REPORT

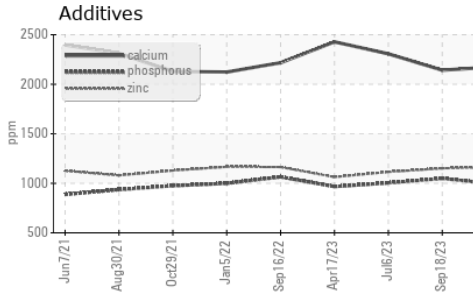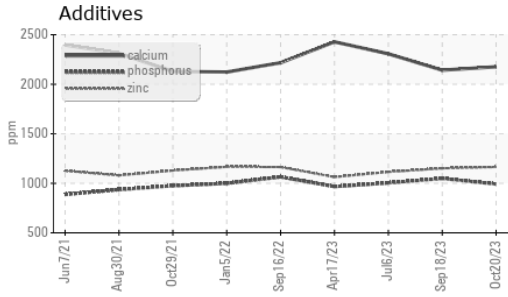


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.4	11.9

## GRAPHS


**Iron (ppm)**

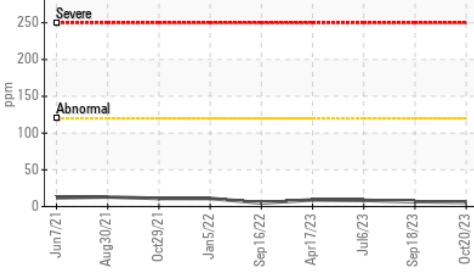


**Lead (ppm)**

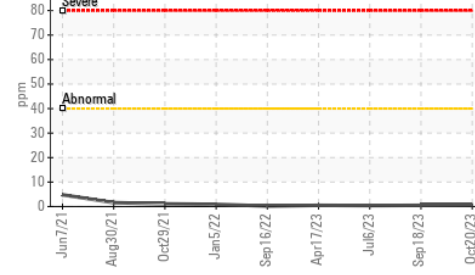


**Aluminum (ppm)**

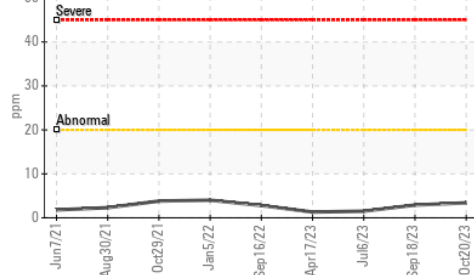


**Chromium (ppm)**

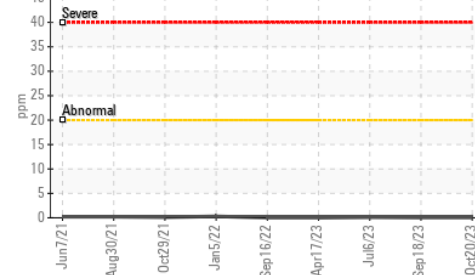


**Copper (ppm)**

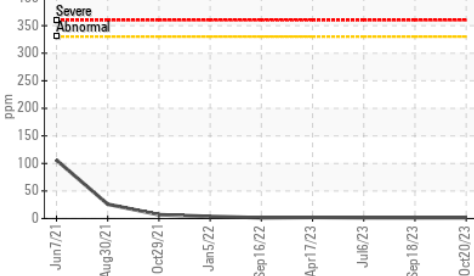


**Silicon (ppm)**

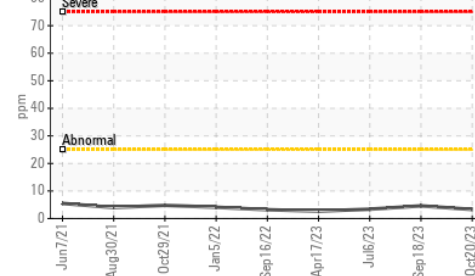

**Viscosity @ 100°C**

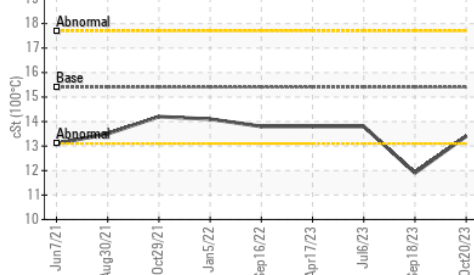

**Soot %**

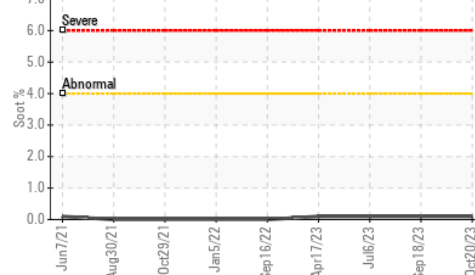

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0042862  
**Lab Number** : 02590844  
**Unique Number** : 5667923  
**Test Package** : MOB 1

**GFL Environmental - 222 - Sandhill**  
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD  
 ORANGEVILLE, ON  
 CA L9W 3X5  
 Contact: GLENN COOK  
 gcook@gflenv.com  
 T: (519)940-4167  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.