




# OIL ANALYSIS REPORT

Sample Rating Trend

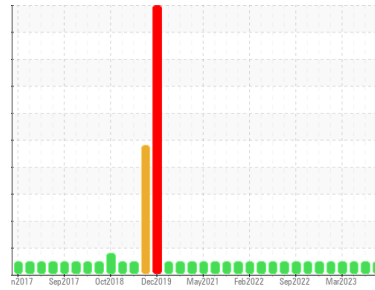

**NORMAL**



Machine Id  
**7178**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097547</b>	GFL0088943	GFL0074306
Sample Date	Client Info		<b>19 Oct 2023</b>	24 Aug 2023	22 Jun 2023
Machine Age	hrs	Client Info	<b>21709</b>	21159	20489
Oil Age	hrs	Client Info	<b>543</b>	599	530
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>29</b>	32	37
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>9</b>	10	6
Lead	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m)	>100	<b>1</b>	1	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>5</b>	5	4
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>60</b>	58	57
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>946</b>	941	928
Calcium	ppm	ASTM D5185(m)	1070	<b>1051</b>	1032	990
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1000</b>	1039	997
Zinc	ppm	ASTM D5185(m)	1270	<b>1180</b>	1179	1140
Sulfur	ppm	ASTM D5185(m)	2060	<b>2473</b>	2489	2389
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	6	7
Sodium	ppm	ASTM D5185(m)		<b>6</b>	7	7
Potassium	ppm	ASTM D5185(m)	>20	<b>19</b>	21	9

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.7</b>	0.8	1.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.2</b>	9.6	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.3</b>	22.3	22.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.5</b>	17.2	19.1











# OIL ANALYSIS REPORT

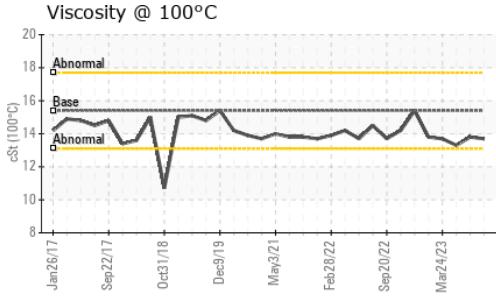

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.7	13.8

## GRAPHS

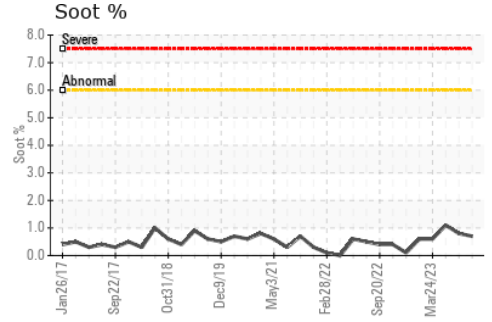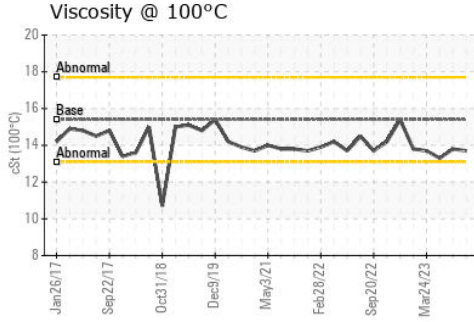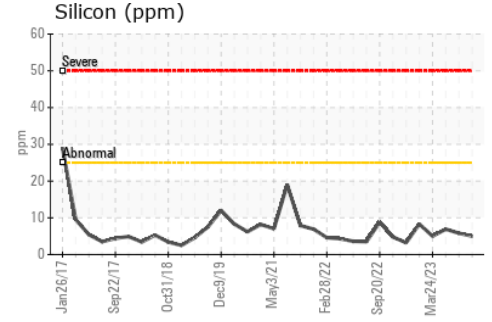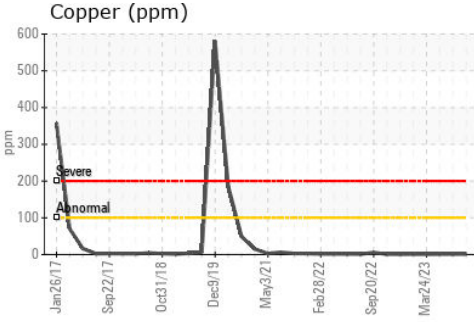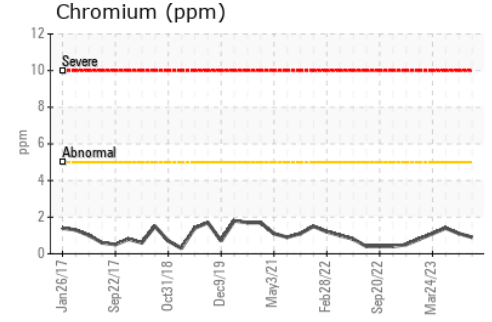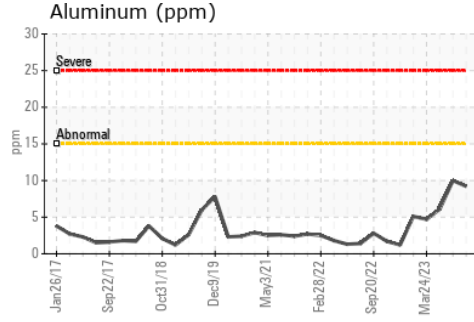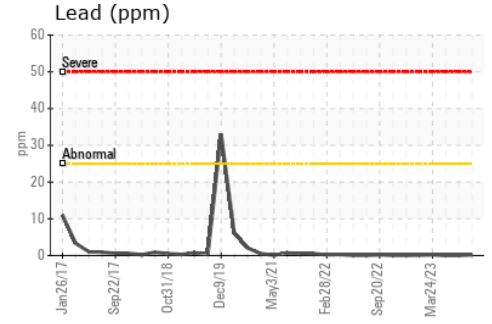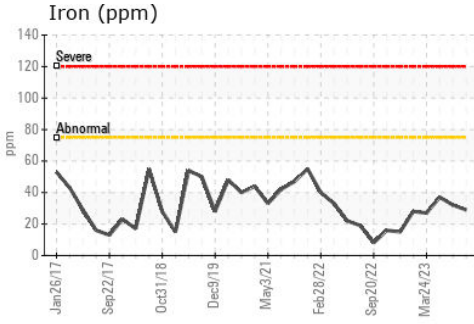

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0097547 **Received** : 23 Oct 2023  
**Lab Number** : 02590889 **Diagnosed** : 23 Oct 2023  
**Unique Number** : 5667968 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 216**  
 15 Bermondsey Road, Building B  
 Toronto, ON  
 CA M4B 1Y9  
 Contact: Tom Hatzioannidis  
 thatzioannidis@gflenv.com  
 T: (416)678-9340  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.