




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**801043**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (22 LTR)**

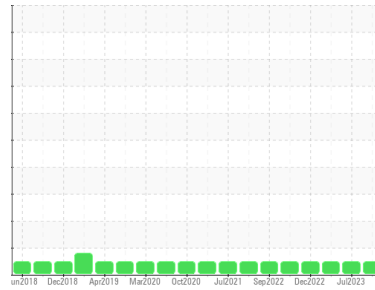

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0094190</b>	GFL0086512	GFL0086507
Sample Date	Client Info	<b>11 Oct 2023</b>	11 Jul 2023	23 Jun 2023
Machine Age	hrs	<b>57401</b>	0	9515
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >80	<b>18</b>	9	30
Chromium	ppm ASTM D5185(m) >5	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >3	<b>&lt;1</b>	0	<1
Aluminum	ppm ASTM D5185(m) >30	<b>4</b>	2	6
Lead	ppm ASTM D5185(m) >30	<b>&lt;1</b>	0	<1
Copper	ppm ASTM D5185(m) >150	<b>2</b>	<1	2
Tin	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>4</b>	6	4
Barium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185(m) 60	<b>61</b>	58	62
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	<b>949</b>	962	987
Calcium	ppm ASTM D5185(m) 1070	<b>1075</b>	1033	1058
Phosphorus	ppm ASTM D5185(m) 1150	<b>985</b>	1056	1043
Zinc	ppm ASTM D5185(m) 1270	<b>1185</b>	1181	1213
Sulfur	ppm ASTM D5185(m) 2060	<b>2372</b>	2513	2311
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	<b>10</b>	4	11
Sodium	ppm ASTM D5185(m)	<b>9</b>	5	10
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	1	3

## INFRA-RED


method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.7</b>	0.2	0.9
Nitration	Abs/cm ASTM D7624* >20	<b>10.0</b>	6.6	11.5
Sulfation	Abs/.1mm ASTM D7415* >30	<b>20.9</b>	19.3	24.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	<b>17.2</b>	14.5	20.7











# OIL ANALYSIS REPORT

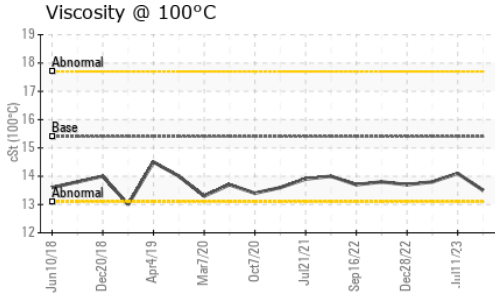

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	14.1

## GRAPHS

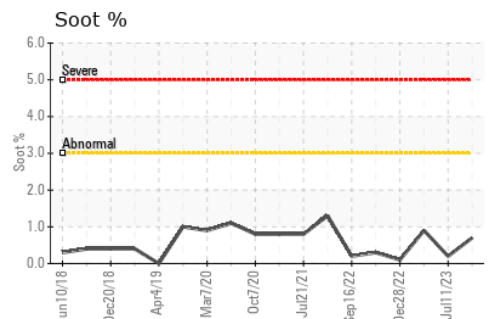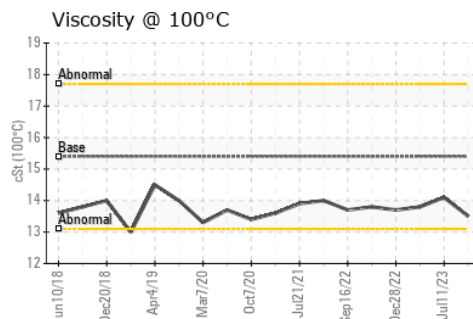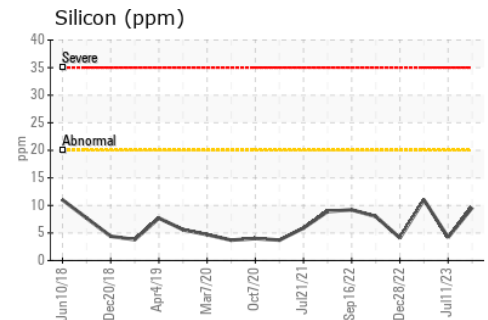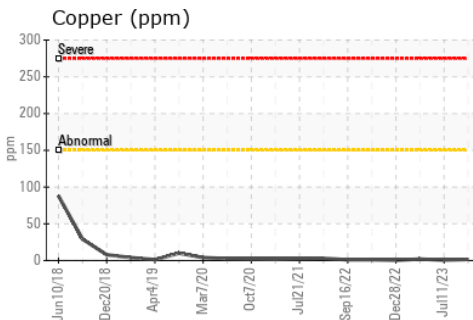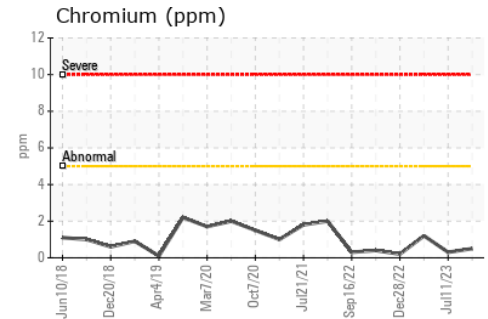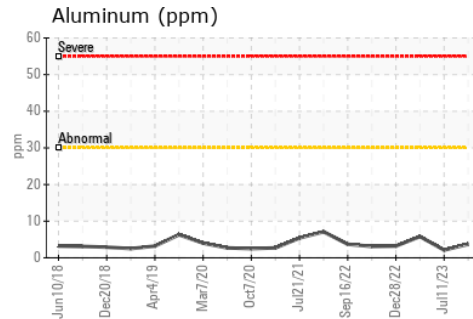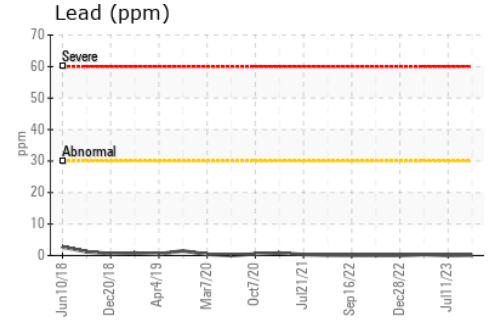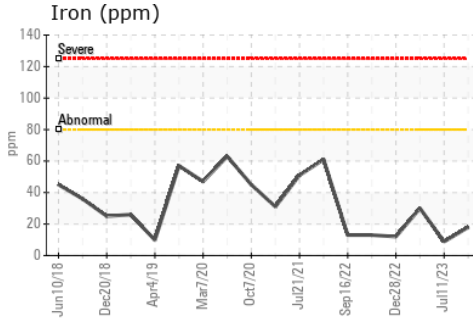

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0094190  
**Lab Number** : 02590893  
**Unique Number** : 5667972  
**Test Package** : MOB 1

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (905)713-2445