




OIL ANALYSIS REPORT

Sample Rating Trend

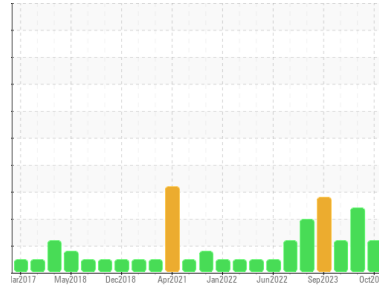

FUEL



Machine Id
9973

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0093885 | GFL0093890 | GFL0093902 |
| Sample Date | Client Info | 22 Oct 2023 | 04 Oct 2023 | 19 Sep 2023 |
| Machine Age | hrs | 0 | 28141 | 28029 |
| Oil Age | hrs | 0 | 0 | 429 |
| Oil Changed | Client Info | N/A | Changed | Not Chngd |
| Sample Status | | ABNORMAL | SEVERE | ABNORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|--------------------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) >110 | 4 | 6 | 4 |
| Chromium | ppm | ASTM D5185(m) >4 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) >2 | <1 | <1 | <1 |
| Aluminum | ppm | ASTM D5185(m) >25 | 1 | 2 | 1 |
| Lead | ppm | ASTM D5185(m) >45 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) >85 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) >4 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|--------------------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) 2 | 7 | 2 | 3 |
| Barium | ppm | ASTM D5185(m) 0 | <1 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 50 | 56 | 52 | 53 |
| Manganese | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 950 | 881 | 821 | 863 |
| Calcium | ppm | ASTM D5185(m) 1050 | 979 | 897 | 940 |
| Phosphorus | ppm | ASTM D5185(m) 995 | 937 | 883 | 903 |
| Zinc | ppm | ASTM D5185(m) 1180 | 1088 | 1020 | 1055 |
| Sulfur | ppm | ASTM D5185(m) 2600 | 2422 | 2229 | 2343 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|--------------|----------|-------|
| Silicon | ppm | ASTM D5185(m) >30 | 3 | 4 | 3 |
| Sodium | ppm | ASTM D5185(m) | 8 | 11 | 6 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | <1 | 2 |
| Fuel | % | ASTM D7593* >5 | ▲ 6.9 | ◆ 9.1 | ▲ 6.7 |

INFRA-RED



| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|-------------|----------|------|
| Soot % | % | ASTM D7844* >3 | 0.1 | 0.2 | 0.1 |
| Nitration | Abs/cm | ASTM D7624* >20 | 5.8 | 7.5 | 6.0 |
| Sulfation | Abs/.1mm | ASTM D7415* >30 | 18.4 | 21.6 | 19.8 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|-------------|----------|------|
| Oxidation | Abs/.1mm | ASTM D7414* >25 | 14.2 | 20.3 | 17.1 |











OIL ANALYSIS REPORT

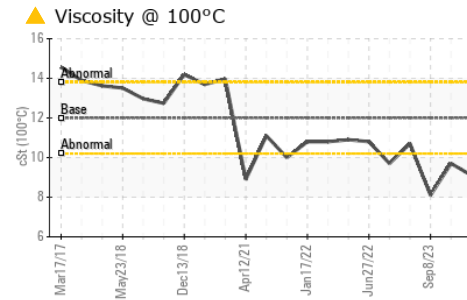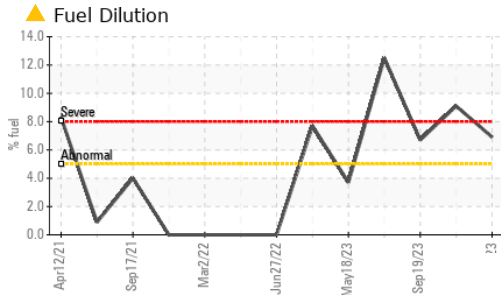

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 12.00 | ▲ 9.8 | ▲ 9.1 |

GRAPHS

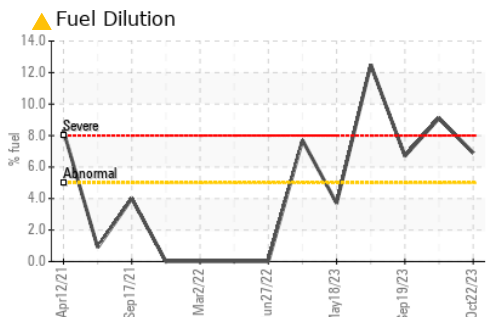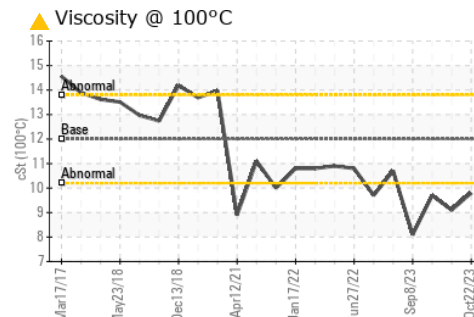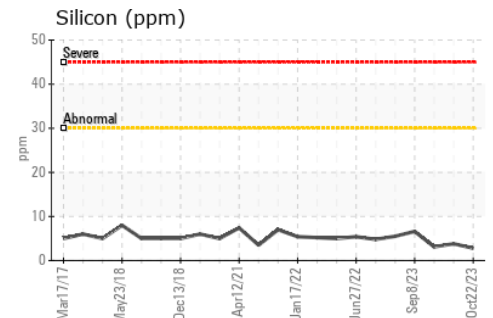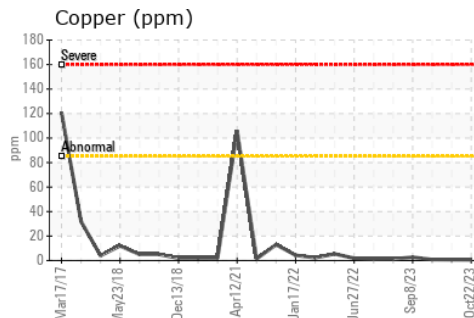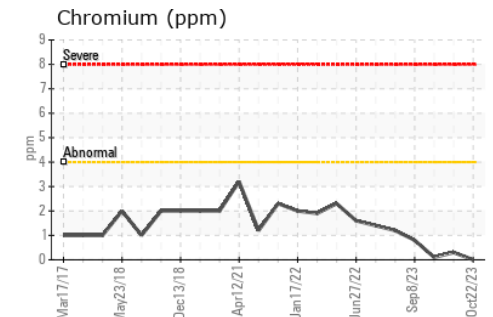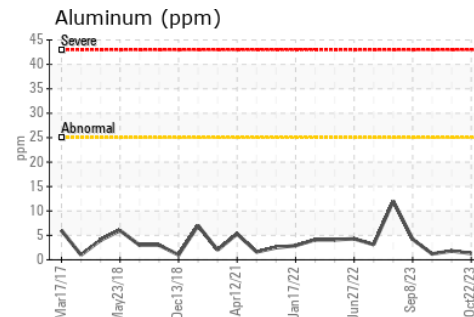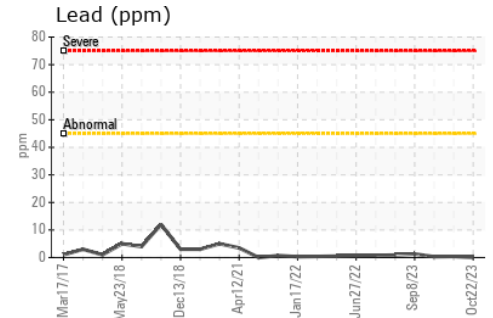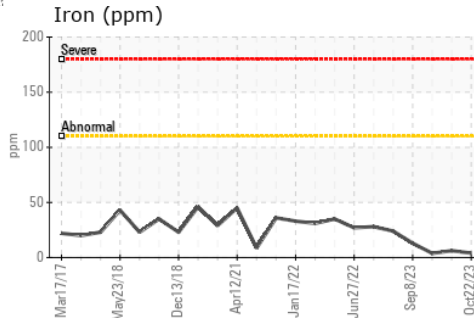

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0093885 **Received** : 23 Oct 2023
Lab Number : 02590936 **Diagnosed** : 24 Oct 2023
Unique Number : 5668015 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

8409 -15th Street NW
 Edmonton, AB
 CA T6P 0B8
 Contact: Antonio De Rosa
 atheros@gflenv.com
 T: (780)509-2640
 F: (780)444-8851