




OIL ANALYSIS REPORT

Sample Rating Trend

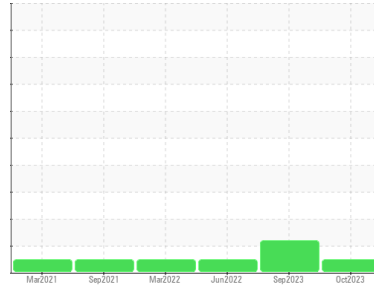

NORMAL



Machine Id

0535

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Test for glycol is negative. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0093883	GFL0093898	GFL0054198
Sample Date	Client Info	22 Oct 2023	29 Sep 2023	13 Jun 2022
Machine Age	kms Client Info	0	152162	0
Oil Age	kms Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		NORMAL	ATTENTION	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	6	30	15
Chromium	ppm ASTM D5185(m) >20	0	2	<1
Nickel	ppm ASTM D5185(m) >4	0	0	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >3	<1	<1	0
Aluminum	ppm ASTM D5185(m) >20	1	3	2
Lead	ppm ASTM D5185(m) >40	<1	2	<1
Copper	ppm ASTM D5185(m) >330	<1	2	1
Tin	ppm ASTM D5185(m) >15	0	0	<1
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 2	5	9	3
Barium	ppm ASTM D5185(m) 0	<1	<1	0
Molybdenum	ppm ASTM D5185(m) 50	59	71	57
Manganese	ppm ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm ASTM D5185(m) 950	932	904	968
Calcium	ppm ASTM D5185(m) 1050	1006	1120	1034
Phosphorus	ppm ASTM D5185(m) 995	992	1020	1036
Zinc	ppm ASTM D5185(m) 1180	1127	1167	1196
Sulfur	ppm ASTM D5185(m) 2600	2512	2535	2569
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	4	15	4
Sodium	ppm ASTM D5185(m)	59	▲ 257	2
Potassium	ppm ASTM D5185(m) >20	7	33	<1
Glycol	% ASTM D7922*	0.0	0.0	NEG

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.2	1.4	1
Nitration	Abs/cm ASTM D7624* >20	4.9	8.2	7.7
Sulfation	Abs/.1mm ASTM D7415* >30	18.3	22.1	22.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm ASTM D7414* >25	13.6	15.5	16.3











OIL ANALYSIS REPORT

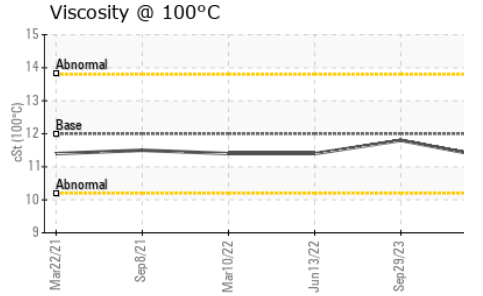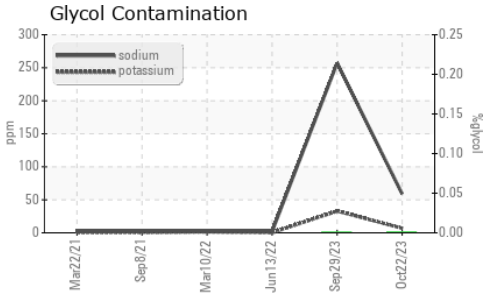

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	11.8

GRAPHS

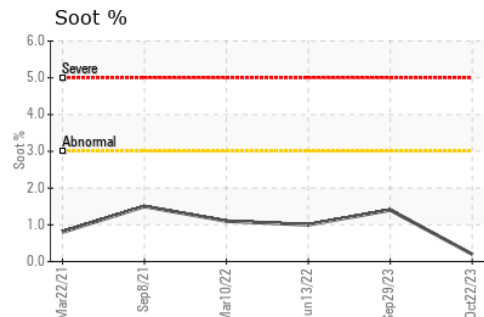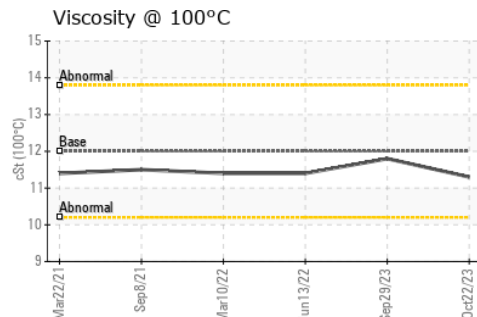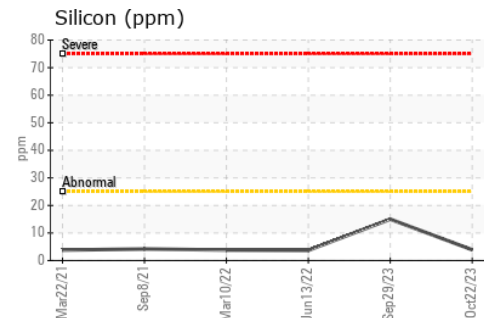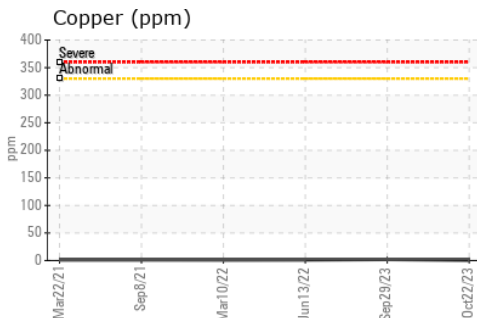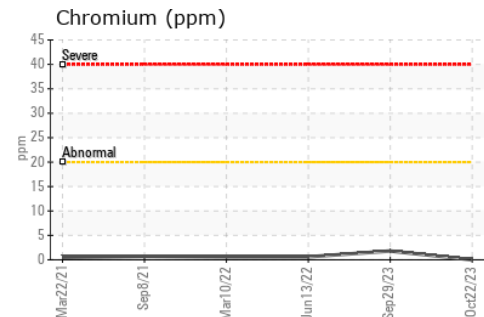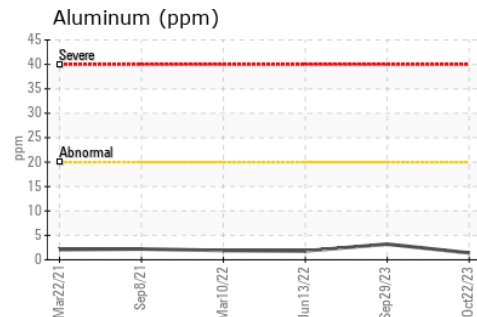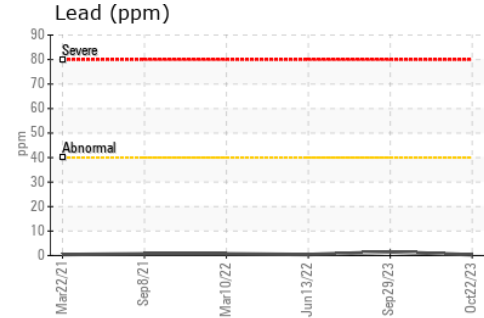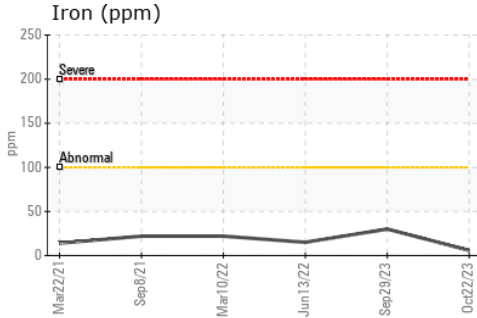

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0093883 **Received** : 23 Oct 2023
Lab Number : 02590938 **Diagnosed** : 23 Oct 2023
Unique Number : 5668017 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.