


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

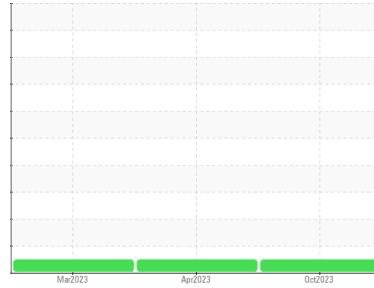

Machine Id  
**SCANIA G4**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP E6 10W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0026754</b>	PC0026758	PC0026762
Sample Date	Client Info		<b>10 Oct 2023</b>	12 Apr 2023	03 Mar 2023
Machine Age	kms	Client Info	<b>1949</b>	1500	987
Oil Age	kms	Client Info	<b>449</b>	510	400
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>7</b>	6	5
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >20	<b>2</b>	2	1
Lead	ppm	ASTM D5185(m) >40	<b>13</b>	11	3
Copper	ppm	ASTM D5185(m) >330	<b>3</b>	2	4
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	1	1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>75</b>	83	86
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>49</b>	47	48
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m) 80	<b>941</b>	927	951
Calcium	ppm	ASTM D5185(m) 2400	<b>1351</b>	1375	1377
Phosphorus	ppm	ASTM D5185(m) 750	<b>698</b>	771	816
Zinc	ppm	ASTM D5185(m) 840	<b>881</b>	877	880
Sulfur	ppm	ASTM D5185(m) 2130	<b>1907</b>	1922	1930
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1




## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>5</b>	4	4
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624* >20	<b>11.4</b>	11.2	11.2
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>21.6</b>	21.9	23.5

# OIL ANALYSIS REPORT






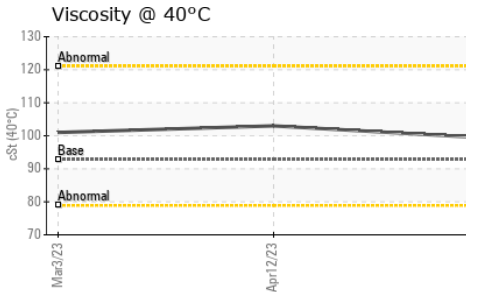
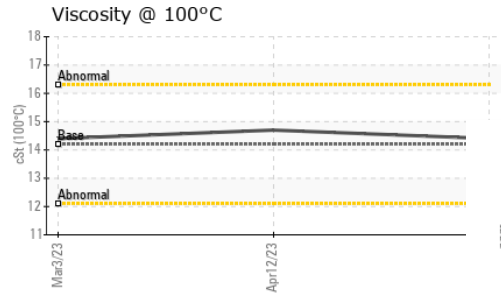
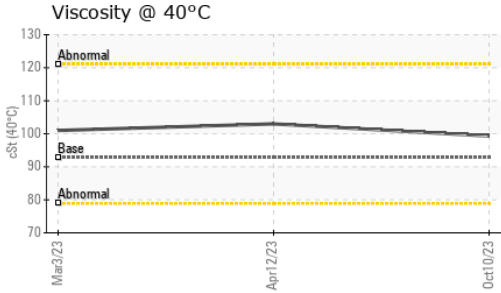


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>24.3</b>	24.0	23.6
Base Number (BN)	mg KOH/g	ASTM D2896*	9.5	<b>8.16</b>	8.57	8.90

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	92.8	<b>99.3</b>	103	101
Visc @ 100°C	cSt	ASTM D7279(m)	14.2	<b>14.4</b>	14.7	14.4
Viscosity Index (VI)	Scale	ASTM D2270*	157	<b>149</b>	147	146

## GRAPHS

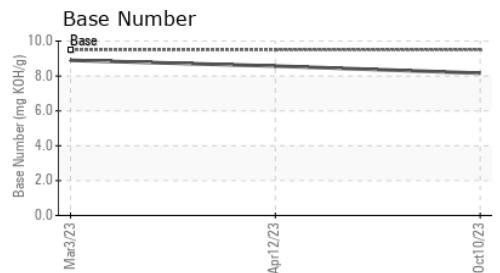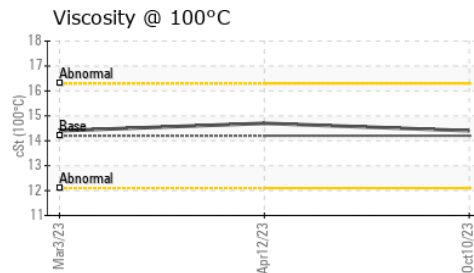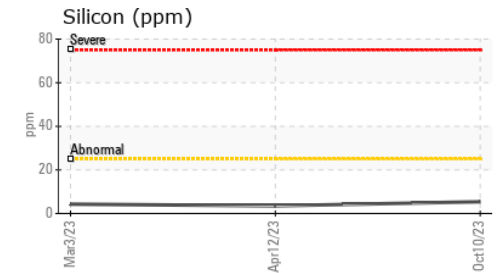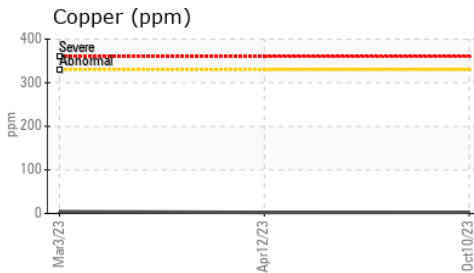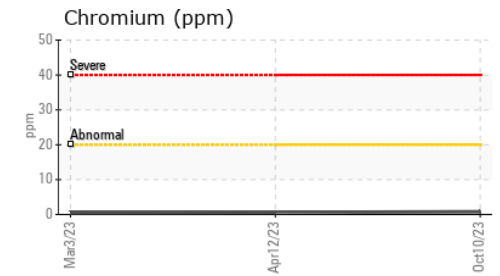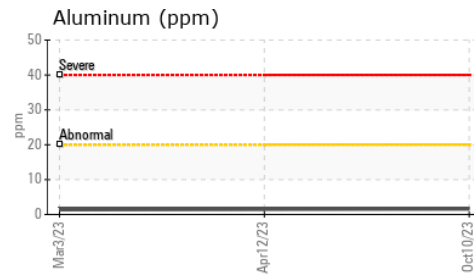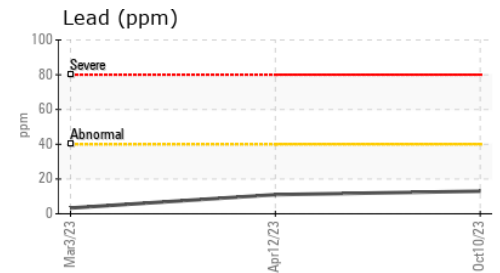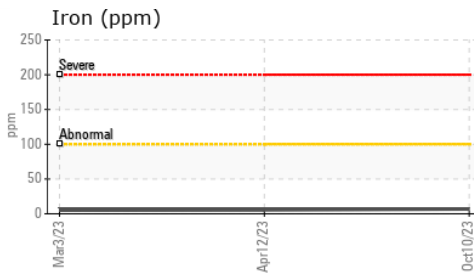

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0026754 **Received** : 24 Oct 2023  
**Lab Number** : **02591335** **Diagnosed** : 25 Oct 2023  
**Unique Number** : 5668414 **Diagnostician** : Kevin Marson  
**Test Package** : MOB 2 ( Additional Tests: KV40, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**EDF**  
 RUE MARCEL HELENE  
 MIQUELON, ZZ  
 FR 97500  
 Contact: Jean-Pascal Autin  
 jean-pascal.autin@edf.fr  
 T: (011)508-416162  
 F: