

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
JOHN LEECH
Machine Id
DODGE RAM 1500
Component
Gasoline Engine
Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (--- GAL)



DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0081805	---	---
Sample Date	Client Info		16 Oct 2023	---	---
Machine Age	kms	Client Info	125000	---	---
Oil Age	kms	Client Info	17000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >150	15	---	---
Chromium	ppm	ASTM D5185(m) >20	<1	---	---
Nickel	ppm	ASTM D5185(m) >5	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >2	<1	---	---
Aluminum	ppm	ASTM D5185(m) >40	1	---	---
Lead	ppm	ASTM D5185(m) >50	<1	---	---
Copper	ppm	ASTM D5185(m) >155	27	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 183	38	---	---
Barium	ppm	ASTM D5185(m) 0	0	---	---
Molybdenum	ppm	ASTM D5185(m) 36	75	---	---
Manganese	ppm	ASTM D5185(m) 0	0	---	---
Magnesium	ppm	ASTM D5185(m) 417	530	---	---
Calcium	ppm	ASTM D5185(m) 1318	1291	---	---
Phosphorus	ppm	ASTM D5185(m) 773	652	---	---
Zinc	ppm	ASTM D5185(m) 845	788	---	---
Sulfur	ppm	ASTM D5185(m) 2690	2314	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	8	---	---
Sodium	ppm	ASTM D5185(m) >400	6	---	---
Potassium	ppm	ASTM D5185(m) >20	1	---	---


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.0	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.8	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.3	---

OIL ANALYSIS REPORT








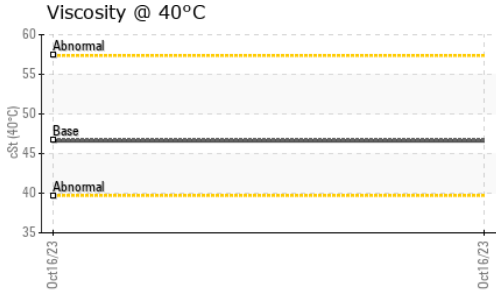


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

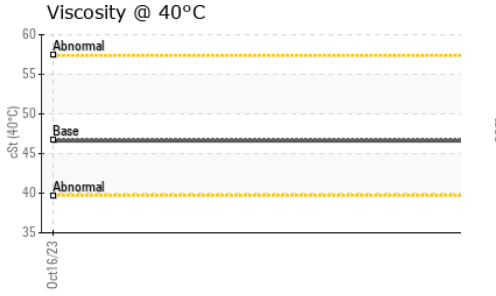

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.7	46.6	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.42	8.4	---
Viscosity Index (VI)	Scale	ASTM D2270*	158	157	---

GRAPHS

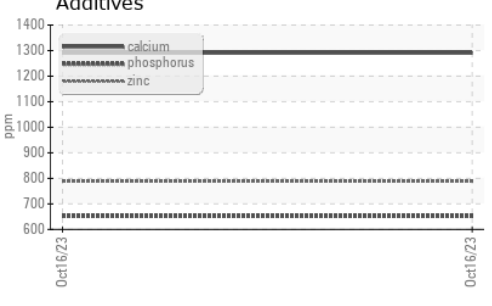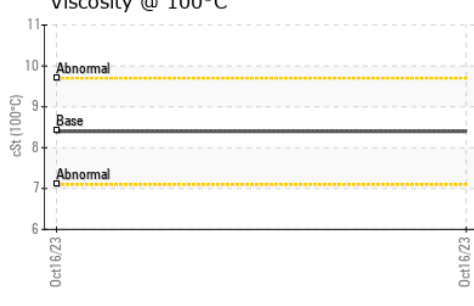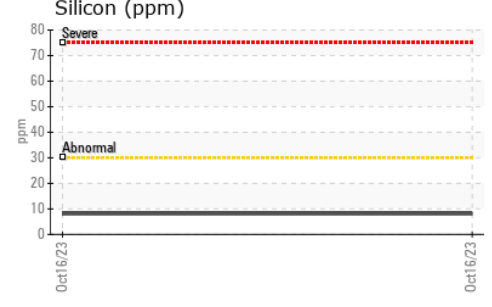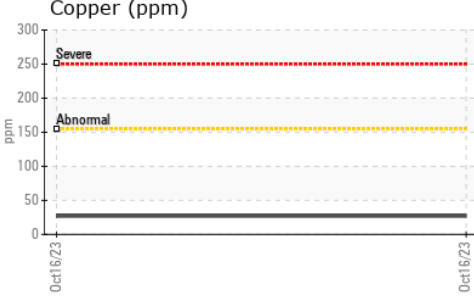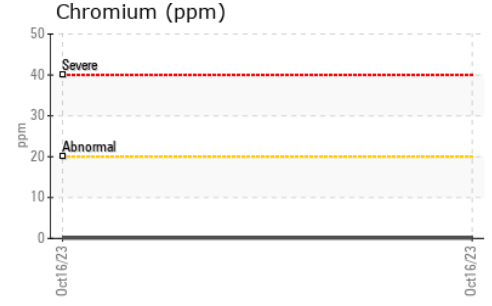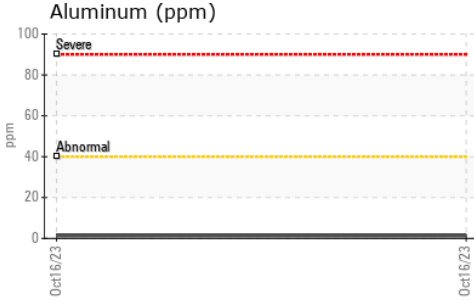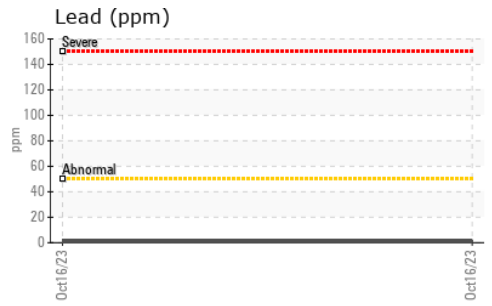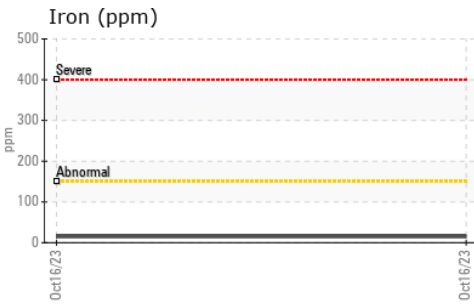

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081805 **Received** : 24 Oct 2023
Lab Number : **02591378** **Diagnosed** : 24 Oct 2023
Unique Number : 5668457 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

SUPERLINE FUELS
 3479 BARRINGTON ST.
 HALIFAX, NS
 CA B3K 2X8
 Contact: John Leech
 john.leech@superlinefuels.ca
 T: _____
 F: (902)425-3784

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*