




OIL ANALYSIS REPORT

Sample Rating Trend

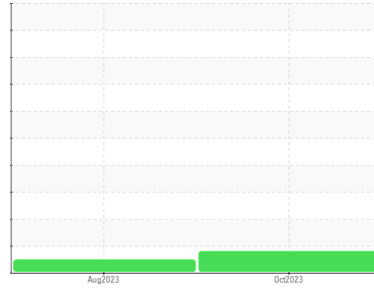

WEAR



Area
GFL216
Machine Id
413138
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Copper ppm levels are abnormal. Bearing wear is indicated.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | GFL0099654 | GFL0089251 | --- |
| Sample Date | Client Info | | 11 Oct 2023 | 04 Aug 2023 | --- |
| Machine Age | hrs | Client Info | 1162 | 13119 | --- |
| Oil Age | hrs | Client Info | 582 | 0 | --- |
| Oil Changed | Client Info | | Changed | Changed | --- |
| Sample Status | | | ABNORMAL | NORMAL | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Glycol | WC Method | | NEG | NEG | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >120 | 20 | 29 | --- |
| Chromium | ppm | ASTM D5185(m) >20 | <1 | <1 | --- |
| Nickel | ppm | ASTM D5185(m) >5 | <1 | <1 | --- |
| Titanium | ppm | ASTM D5185(m) >2 | 0 | <1 | --- |
| Silver | ppm | ASTM D5185(m) >2 | 1 | 1 | --- |
| Aluminum | ppm | ASTM D5185(m) >20 | 3 | 6 | --- |
| Lead | ppm | ASTM D5185(m) >40 | 12 | 11 | --- |
| Copper | ppm | ASTM D5185(m) >330 | 481 | 442 | --- |
| Tin | ppm | ASTM D5185(m) >15 | 1 | 4 | --- |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | --- |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | 16 | 247 | --- |
| Barium | ppm | ASTM D5185(m) 0 | <1 | <1 | --- |
| Molybdenum | ppm | ASTM D5185(m) 60 | 69 | 122 | --- |
| Manganese | ppm | ASTM D5185(m) 0 | <1 | 4 | --- |
| Magnesium | ppm | ASTM D5185(m) 1010 | 926 | 669 | --- |
| Calcium | ppm | ASTM D5185(m) 1070 | 1110 | 1466 | --- |
| Phosphorus | ppm | ASTM D5185(m) 1150 | 923 | 693 | --- |
| Zinc | ppm | ASTM D5185(m) 1270 | 1114 | 780 | --- |
| Sulfur | ppm | ASTM D5185(m) 2060 | 2146 | 1922 | --- |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >25 | 9 | 56 | --- |
| Sodium | ppm | ASTM D5185(m) | 2 | 4 | --- |
| Potassium | ppm | ASTM D5185(m) >20 | 5 | 10 | --- |
| Fuel | % | ASTM D7593* >3.0 | 0.8 | 0.7 | --- |

INFRA-RED


| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* >4 | 0.2 | 0.1 | --- |
| Nitration | Abs/cm | ASTM D7624* >20 | 8.7 | 10.1 | --- |
| Sulfation | Abs/.1mm | ASTM D7415* >30 | 19.9 | 24.8 | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* >25 | 16.4 | 23.4 | --- |













OIL ANALYSIS REPORT

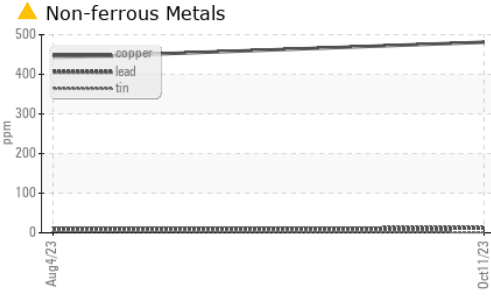

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 12.7 | 9.4 |

GRAPHS

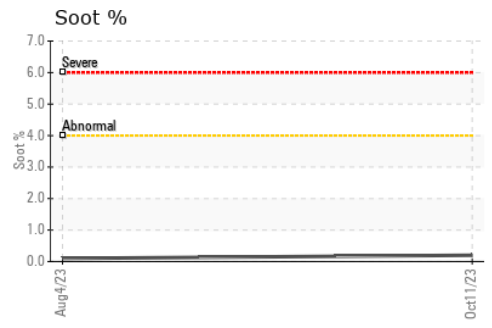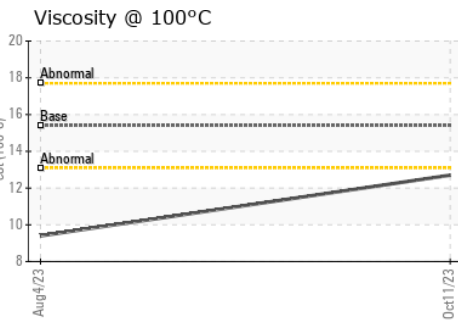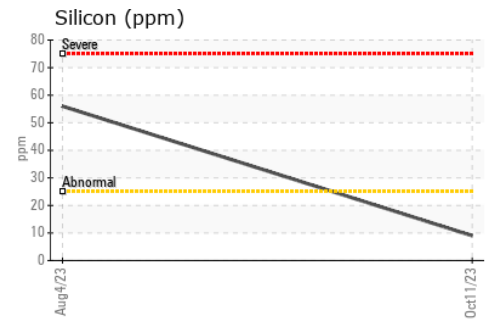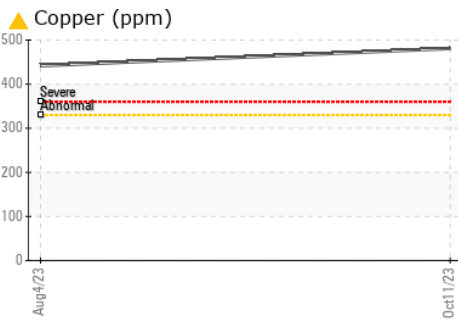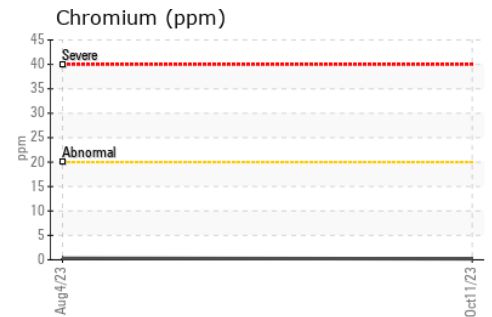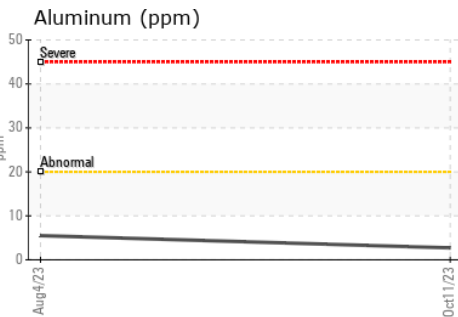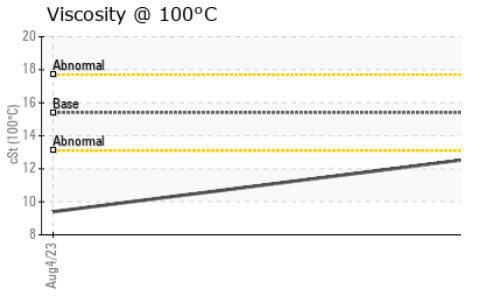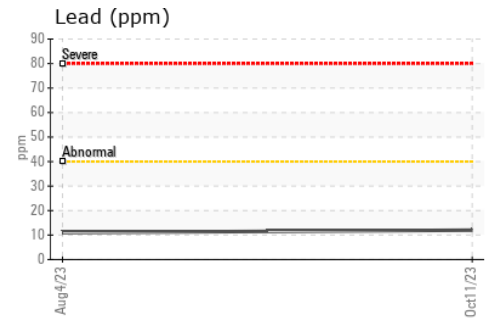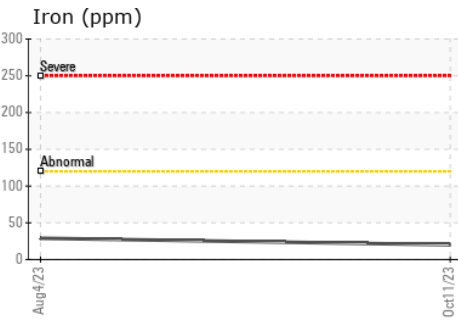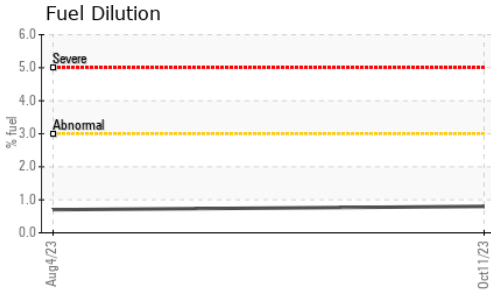

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 252 - GTA Hauling**
Sample No. : GFL0099654 **Received** : 25 Oct 2023 **3668 Weston Road**
Lab Number : 02591680 **Diagnosed** : 26 Oct 2023 **North York, ON**
Unique Number : 5668759 **Diagnostician** : Kevin Marson **CA M9L 1W2**
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel) **Contact: Amanda Cipollone**
acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.