


Area  
**TEAM 1**  
Machine Id  
**122651 Motor Outboard**  
Component  
**Bearing**  
Fluid  
**PETRO CANADA TURBOFLO R&O 32 (4 LTR)**

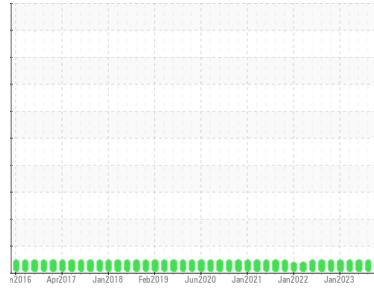

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>PC0069900</b>	PC0069845	PC0070239
Sample Date	Client Info	<b>06 Oct 2023</b>	10 Aug 2023	12 Apr 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**WEAR METALS** method limit/base current history1 history2

PQ	ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m) >20	<b>17</b>	18	18
Copper	ppm	ASTM D5185(m) >20	<b>4</b>	4	3
Tin	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Calcium	ppm	ASTM D5185(m) 0		<b>1</b>	<1	0
Phosphorus	ppm	ASTM D5185(m) 4		<b>4</b>	4	4
Zinc	ppm	ASTM D5185(m) 0		<b>8</b>	9	9
Sulfur	ppm	ASTM D5185(m)		<b>160</b>	164	181
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1





**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185(m) >15		<b>0</b>	0	0
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m) >20		<b>0</b>	0	<1

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D974* 0.15		<b>0.09</b>	0.08	0.08
------------------	----------	-----------------	--	-------------	------	------


# OIL ANALYSIS REPORT

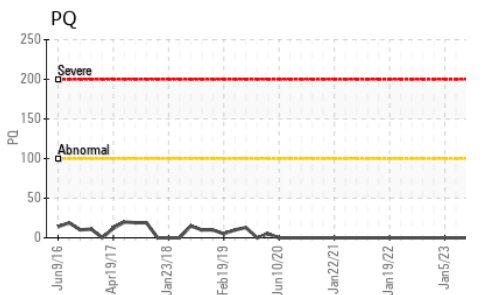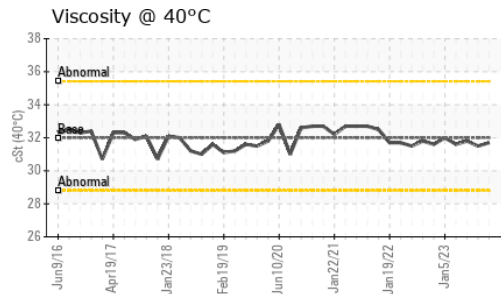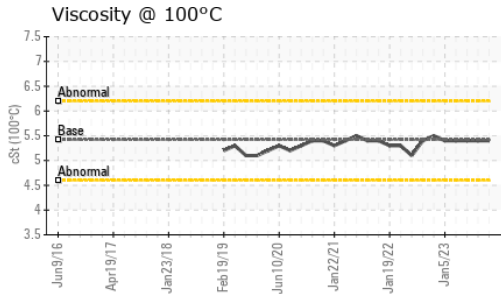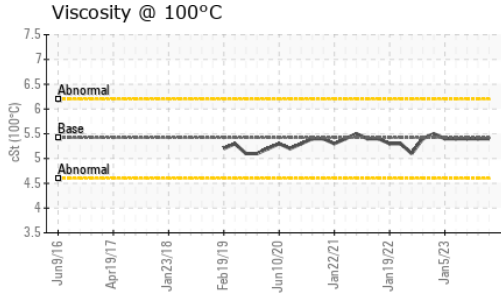






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32.0	31.7	31.5
Visc @ 100°C	cSt	ASTM D7279(m)	5.42	5.4	5.4
Viscosity Index (VI)	Scale	ASTM D2270*	103	104	105

## SAMPLE IMAGES

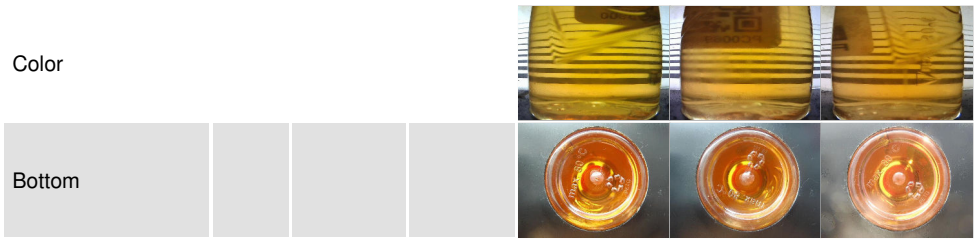

## GRAPHS

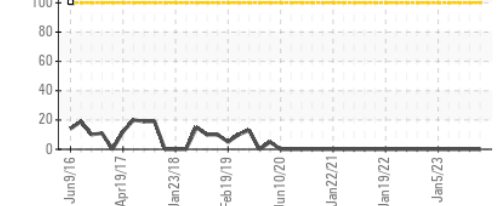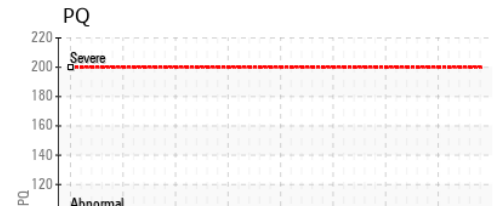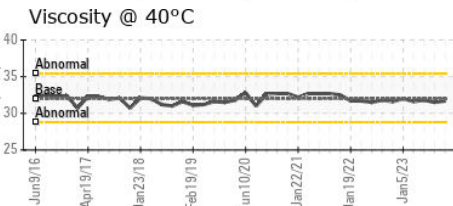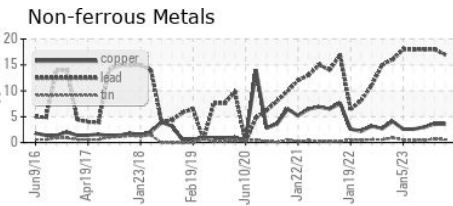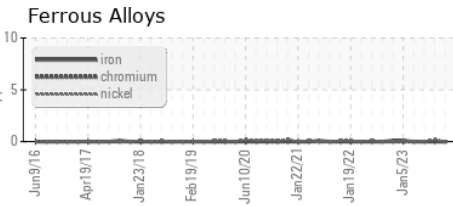

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0069900 **Received** : 25 Oct 2023  
**Lab Number** : 02591760 **Diagnosed** : 26 Oct 2023  
**Unique Number** : 5668839 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, TAN Man, VI )

**Dryden Fibre**  
 Box 3001, 1 Duke Street  
 Dryden, ON  
 CA P8N 2Z7  
 Contact: Adebukola Adekanye  
 AADEKANYE@DRYDENFIBRE.CA  
 T: (807)223-9950  
 F: (807)223-9176

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.