




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
723002
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

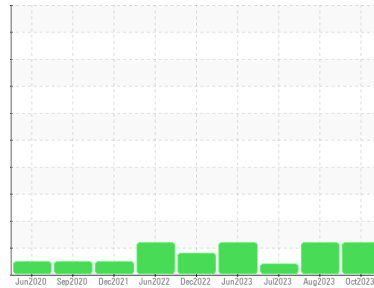

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097317	GFL0090844	GFL0090839
Sample Date	Client Info	25 Oct 2023	08 Aug 2023	31 Jul 2023
Machine Age	hrs	0	28589	14666
Oil Age	hrs	29211	0	0
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >120	8	7	16
Chromium	ppm	ASTM D5185(m) >20	0	<1	<1
Nickel	ppm	ASTM D5185(m) >5	<1	<1	1
Titanium	ppm	ASTM D5185(m) >2	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	4	1	4
Lead	ppm	ASTM D5185(m) >40	<1	<1	2
Copper	ppm	ASTM D5185(m) >330	<1	1	3
Tin	ppm	ASTM D5185(m) >15	0	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	17	26	23
Barium	ppm	ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 60	38	40	46
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	463	514	585
Calcium	ppm	ASTM D5185(m) 1070	1577	1592	1754
Phosphorus	ppm	ASTM D5185(m) 1150	682	772	891
Zinc	ppm	ASTM D5185(m) 1270	807	859	991
Sulfur	ppm	ASTM D5185(m) 2060	1893	2066	2311
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	5	4	6
Sodium	ppm	ASTM D5185(m)	3	3	4
Potassium	ppm	ASTM D5185(m) >20	0	<1	1
Fuel	%	ASTM D7593* >3.0	▲ 4	▲ 3.1	2.5

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >4	0.3	0.1	0.6
Nitration	Abs/cm	ASTM D7624* >20	10.9	8.6	10.5
Sulfation	Abs/.1mm	ASTM D7415* >30	21.5	22.3	22.6


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	21.9	20.0	21.4




OIL ANALYSIS REPORT

▲ Fuel Dilution

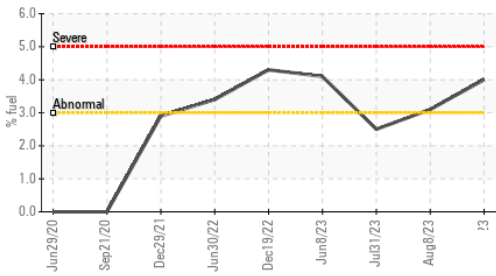

▲ Viscosity @ 100°C

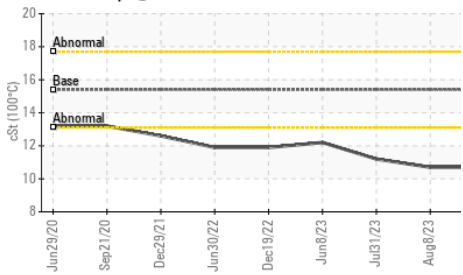


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	▲ 10.7	▲ 10.7	▲ 11.2

GRAPHS


Iron (ppm)

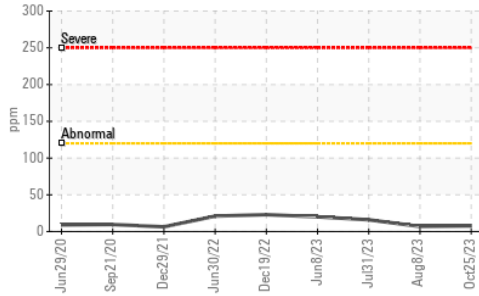


Lead (ppm)

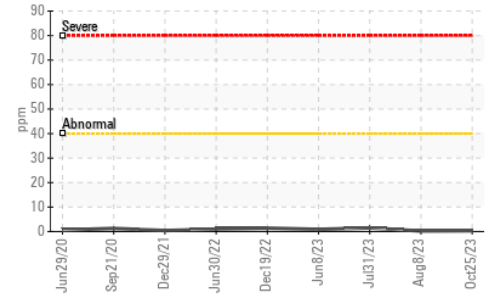


Aluminum (ppm)

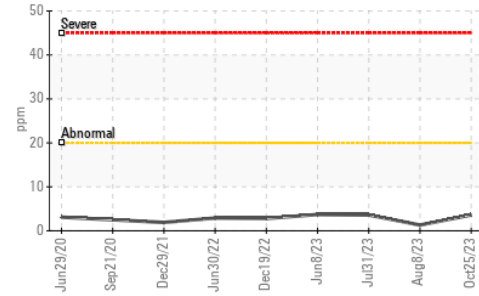


Chromium (ppm)

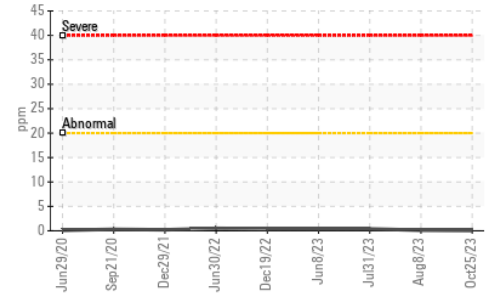


Copper (ppm)

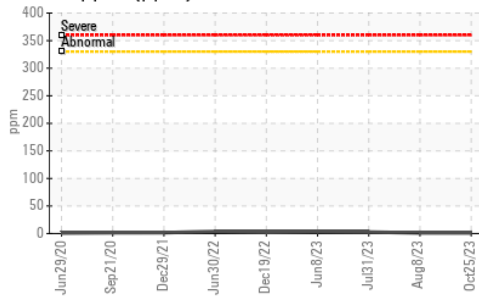


Silicon (ppm)

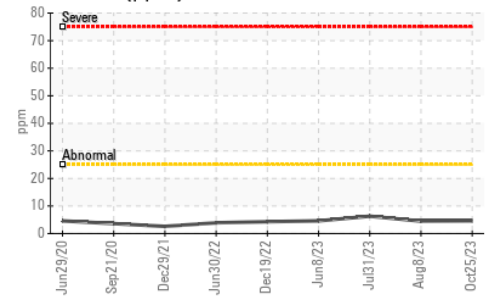

▲ Viscosity @ 100°C

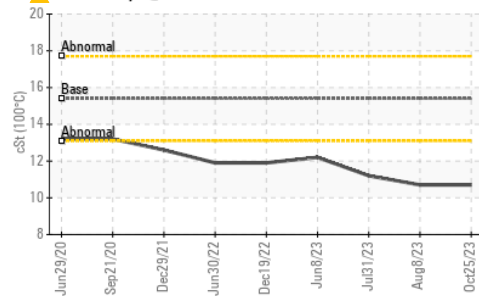

▲ Fuel Dilution

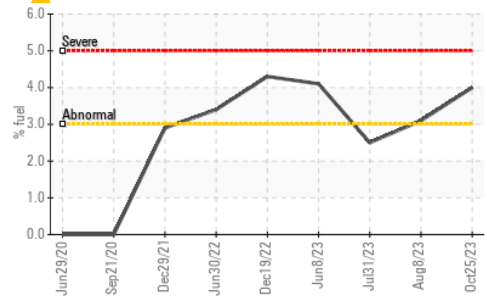

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 246 - Windsor**
Sample No. : GFL0097317 **Received** : 26 Oct 2023
Lab Number : 02591976 **Diagnosed** : 27 Oct 2023
Unique Number : 5669055 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

2700 Deziel Dr
 Windsor, ON
 CA N8W 5H8
 Contact: Dave Varga
 dvarga@gflenv.com
 T: (519)944-8009
 F: