


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

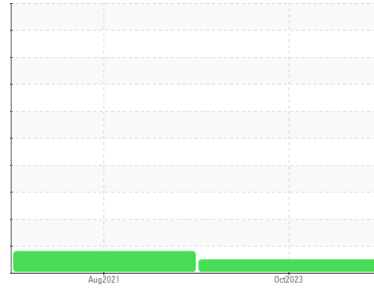

Machine Id
OR646
Component
Transmission (Auto)
Fluid
PETRO CANADA SYNTHETIC BLEND ATF (9 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0080939	PC0051165	---
Sample Date	Client Info		25 Oct 2023	30 Aug 2021	---
Machine Age	hrs	Client Info	0	4486	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			NORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*	>50	0	---	---
Iron	ppm	ASTM D5185(m) >160	33	104	---
Chromium	ppm	ASTM D5185(m) >5	0	<1	---
Nickel	ppm	ASTM D5185(m) >5	<1	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m) >5	<1	<1	---
Aluminum	ppm	ASTM D5185(m) >50	3	10	---
Lead	ppm	ASTM D5185(m) >50	<1	5	---
Copper	ppm	ASTM D5185(m) >225	6	41	---
Tin	ppm	ASTM D5185(m) >10	0	<1	---
Antimony	ppm	ASTM D5185(m)	0	<1	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 90	79	88	---
Barium	ppm	ASTM D5185(m)	9	95	---
Molybdenum	ppm	ASTM D5185(m)	<1	<1	---
Manganese	ppm	ASTM D5185(m)	2	8	---
Magnesium	ppm	ASTM D5185(m)	3	2	---
Calcium	ppm	ASTM D5185(m) 30	284	246	---
Phosphorus	ppm	ASTM D5185(m) 310	280	307	---
Zinc	ppm	ASTM D5185(m) 40	93	90	---
Sulfur	ppm	ASTM D5185(m) 2800	1159	1058	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---





CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	4	7	---
Sodium	ppm	ASTM D5185(m)	2	2	---
Potassium	ppm	ASTM D5185(m) >20	0	2	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.26	0.57	---	---


OIL ANALYSIS REPORT

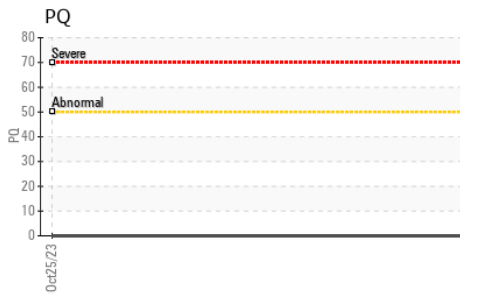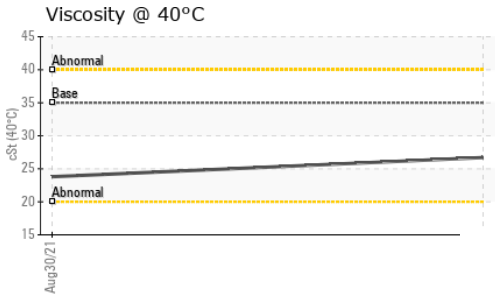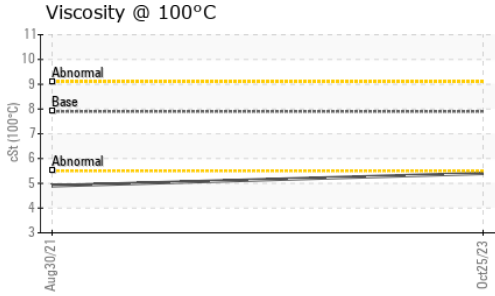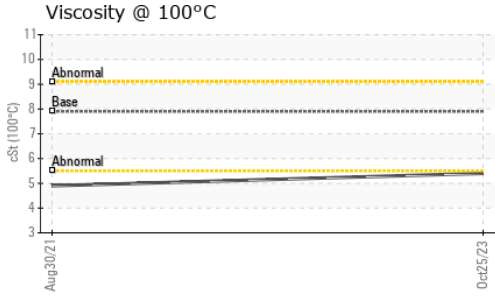






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	35.0	26.7	23.8
Visc @ 100°C	cSt	ASTM D7279(m)	7.9	5.4	4.9
Viscosity Index (VI)	Scale	ASTM D2270*	209	142	132

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

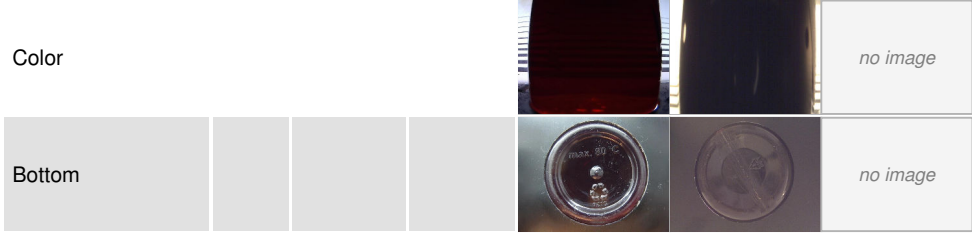

GRAPHS

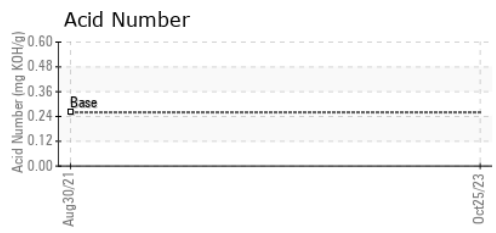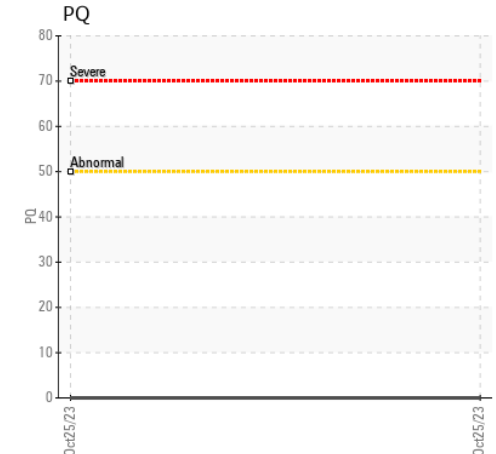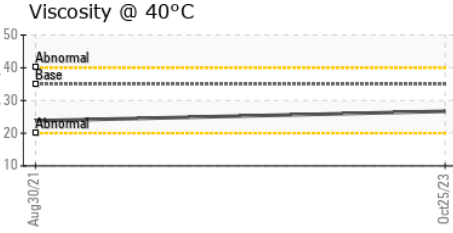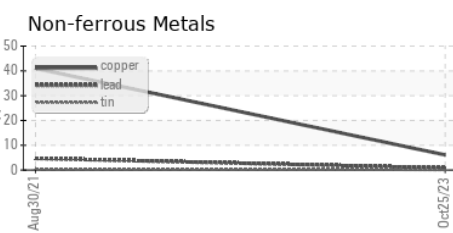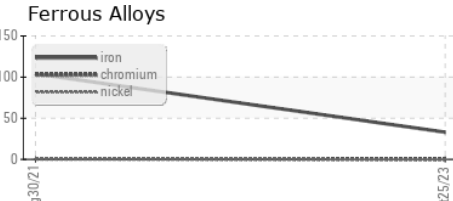

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations
Sample No. : PC0080939 **Received** : 26 Oct 2023
Lab Number : 02592088 **Diagnosed** : 27 Oct 2023
Unique Number : 5669167 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F: