




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
7236
Component
Transmission (Auto)
Fluid
PETRO CANADA DURADRIIVE HD SYNTHETIC ATF (--- GAL)

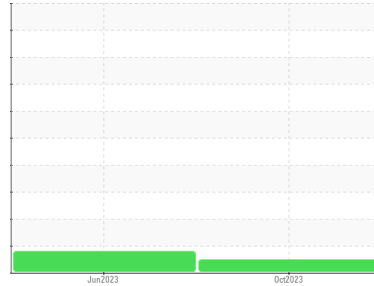

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il n'y a aucun indice de contamination dans le fluide.

Fluid Condition

L'état de le fluide est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0097107	GFL0084445	---
Sample Date	Client Info		24 Oct 2023	02 Jun 2023	---
Machine Age	hrs	Client Info	18690	1764	---
Oil Age	hrs	Client Info	1200	1200	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			NORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>220	46	110	---
Chromium	ppm	ASTM D5185(m)	>2	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	0	0	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>5	<1	0	---
Aluminum	ppm	ASTM D5185(m)	>75	17	44	---
Lead	ppm	ASTM D5185(m)	>95	5	15	---
Copper	ppm	ASTM D5185(m)	>60	35	▲ 86	---
Tin	ppm	ASTM D5185(m)	>10	2	6	---
Antimony	ppm	ASTM D5185(m)	>2	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		76	87	---
Barium	ppm	ASTM D5185(m)		<1	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	1	---
Magnesium	ppm	ASTM D5185(m)		2	2	---
Calcium	ppm	ASTM D5185(m)		95	16	---
Phosphorus	ppm	ASTM D5185(m)		205	250	---
Zinc	ppm	ASTM D5185(m)		12	22	---
Sulfur	ppm	ASTM D5185(m)		1359	1185	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	5	10	---
Sodium	ppm	ASTM D5185(m)		3	5	---
Potassium	ppm	ASTM D5185(m)	>20	0	2	---

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---











OIL ANALYSIS REPORT

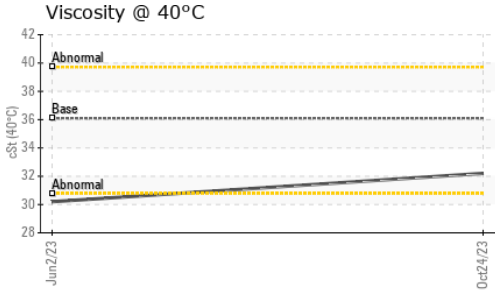

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	36.1	32.2	30.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

GRAPHS

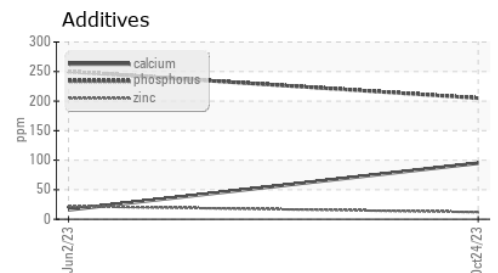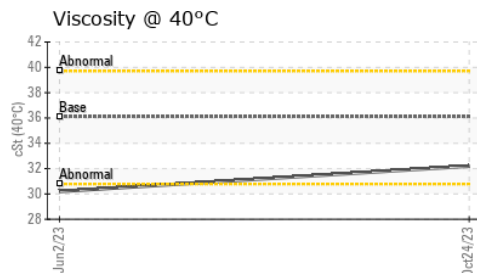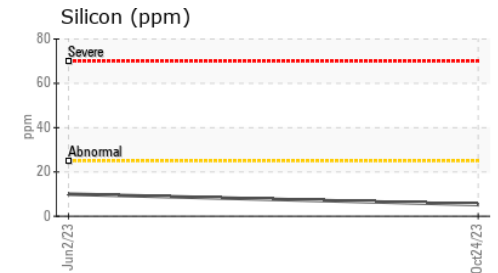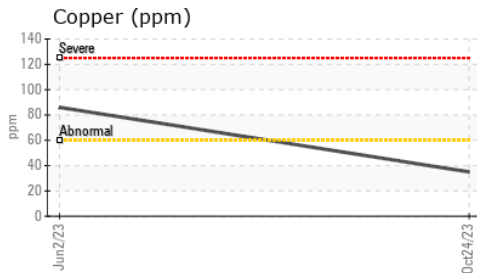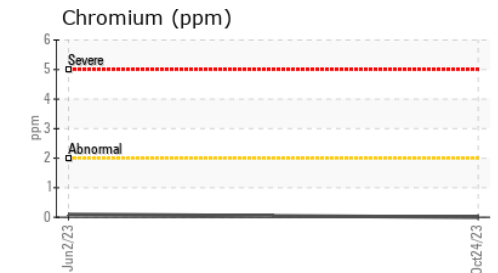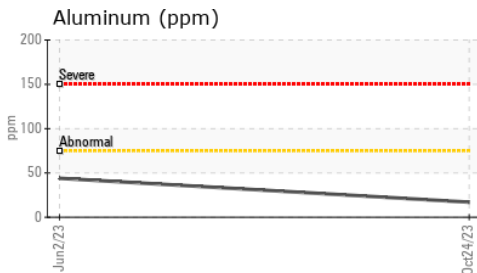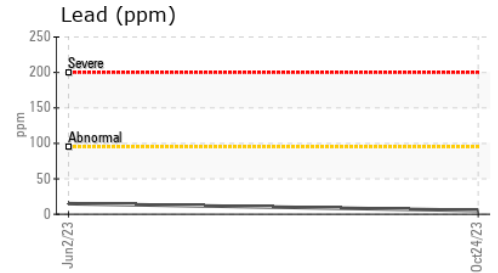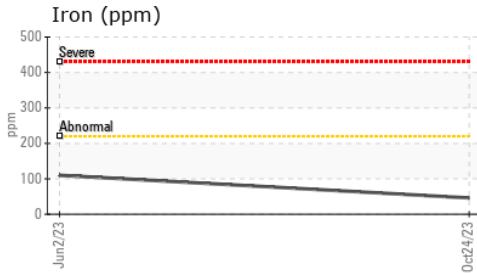

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 780 - GMA - ICI - Solid Waste
Sample No. : GFL0097107 **Received** : 26 Oct 2023 4365 boul. St-Elzear Ouest, Laval, QC
Lab Number : 02592187 **Diagnosed** : 26 Oct 2023 CA H7P 4J3
Unique Number : 5669266 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Pieces Laval
 pieces.laval@gflenv.com
 T: (450)687-3838
 F: