


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

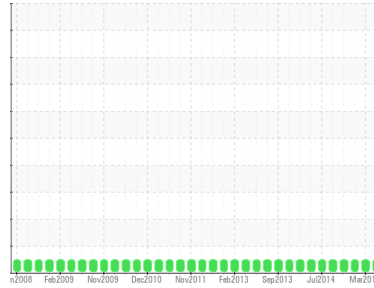

Machine Id
MACK 485
Component
Front Left Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (36 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC	PW021372	PW000026
Sample Date	Client Info		24 Oct 2023	31 Mar 2016	14 Oct 2015
Machine Age	hrs	Client Info	2309	32747	32240
Oil Age	hrs	Client Info	572	504	0
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	15	13	17
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	2
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>20	4	2	2
Lead	ppm	ASTM D5185(m)	>40	1	1	1
Copper	ppm	ASTM D5185(m)	>330	14	3	5
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	2	3
Barium	ppm	ASTM D5185(m)	0	<1	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	59	<1	1
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	928	8	7
Calcium	ppm	ASTM D5185(m)	1050	1062	2347	2156
Phosphorus	ppm	ASTM D5185(m)	995	952	975	906
Zinc	ppm	ASTM D5185(m)	1180	1153	1158	1042
Sulfur	ppm	ASTM D5185(m)	2600	2382	3293	3188
Lithium	ppm	ASTM D5185(m)		<1	<1	<1




CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	2	3
Sodium	ppm	ASTM D5185(m)		2	6	3
Potassium	ppm	ASTM D5185(m)	>20	12	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.3	0.4	1
Nitration	Abs/cm	ASTM D7624*	>20	8.2	7.0	6.3
Sulfation	Abs./1mm	ASTM D7415*	>30	19.7	19.8	20.0

OIL ANALYSIS REPORT






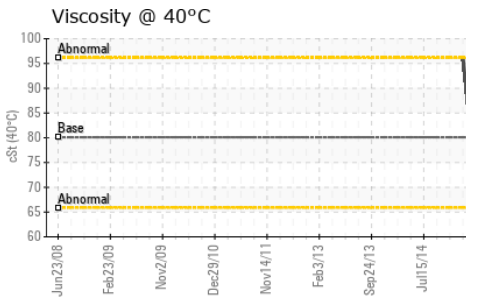
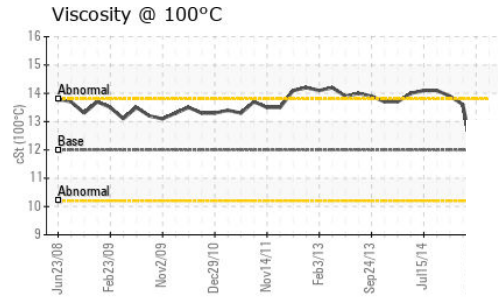
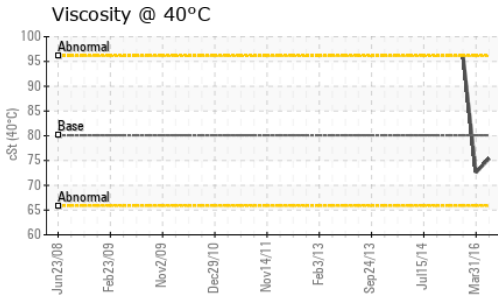


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	15.8	13.8	12.6
Base Number (BN)	mg KOH/g	ASTM D2896*		8.05	8.35	7.70

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	75.4	72.6	96.3
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.4	11.2	13.6
Viscosity Index (VI)	Scale	ASTM D2270*	144	143	145	142

GRAPHS

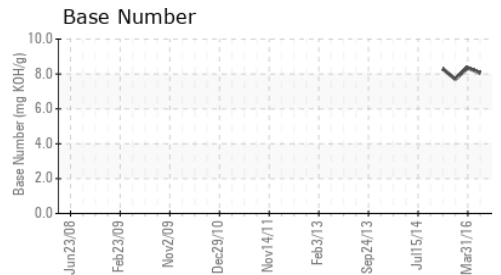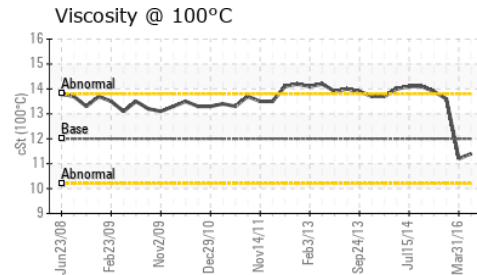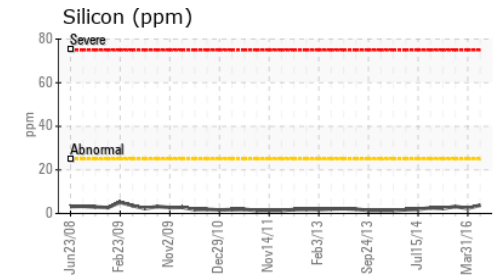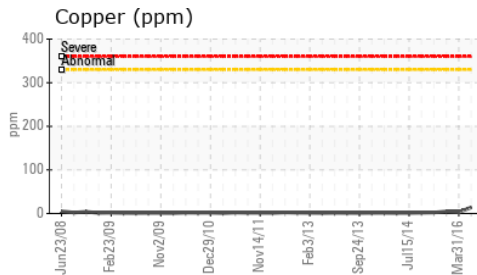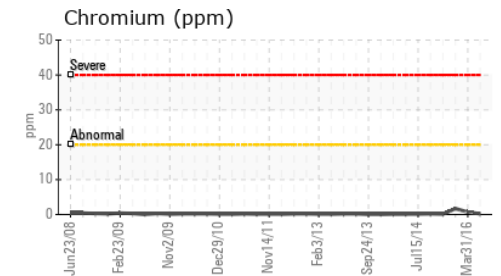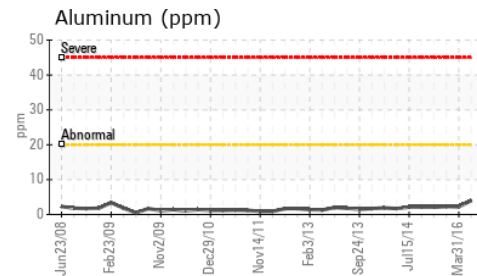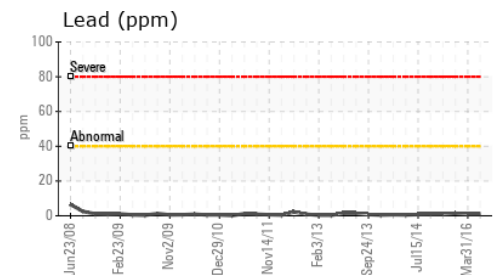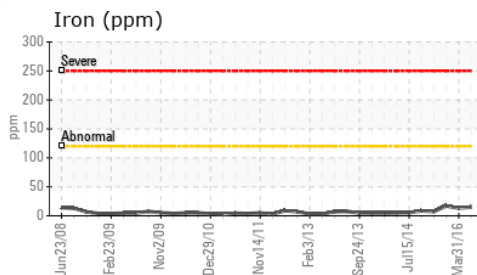

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **PROGRESSIVE WASTE - 613 : ON - LONDON**
Sample No. : PC **Received** : 27 Oct 2023 613 : ON - LONDON
Lab Number : 02592346 **Diagnosed** : 30 Oct 2023 4695 WELLINGTON ROAD SOUTH
Unique Number : 5669425 **Diagnostician** : Wes Davis LONDON, ON
Test Package : MOB 2 (Additional Tests: KV40, VI) CA N6E 0A6

To discuss this sample report, contact Customer Service at 1-800-268-2131. Contact: Hank Wielhouwer
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. hank.wielhouwer@progressivewaste.com
 Validity of results and interpretation are based on the sample and information as supplied. T: (519)681-7920
 F: (519)668-0478