




Machine Id
INTERNATIONAL 1222
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

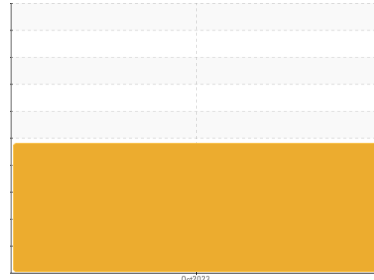

DIAGNOSIS

Recommendation
We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
All component wear rates are normal.

Contamination
Test for glycol is positive. There is a light concentration of glycol present in the oil.

Fluid Condition
The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0081379	---	---
Sample Date	Client Info			11 Oct 2023	---	---
Machine Age	kms	Client Info		198771	---	---
Oil Age	kms	Client Info		4200	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				ABNORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>2.0	<1.0	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	50	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	5	---	---
Lead	ppm	ASTM D5185(m)	>40	3	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	6	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	92	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	868	---	---
Calcium	ppm	ASTM D5185(m)	3000	937	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	871	---	---
Zinc	ppm	ASTM D5185(m)	1350	1069	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2260	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	---	---
Sodium	ppm	ASTM D5185(m)	>158	▲ 220	---	---
Potassium	ppm	ASTM D5185(m)	>20	▲ 292	---	---
Glycol	%	ASTM D7922*		▲ 0.018	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	2.4	---	---
Nitration	Abs/cm	ASTM D7624*	>20	11.9	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.4	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.5	---	---











OIL ANALYSIS REPORT

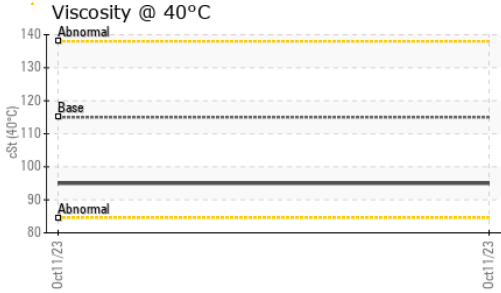

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	95.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	144	---	---

GRAPHS

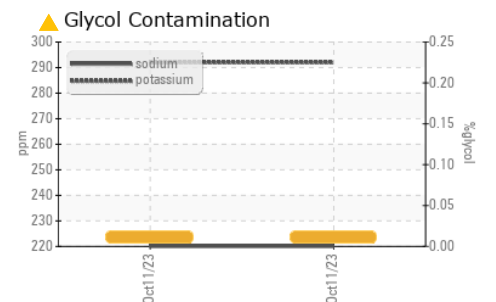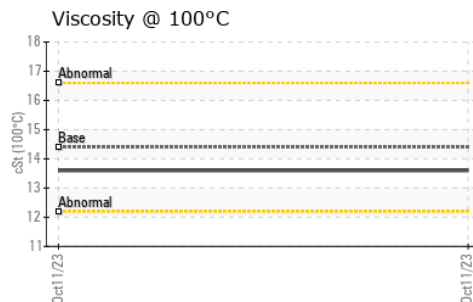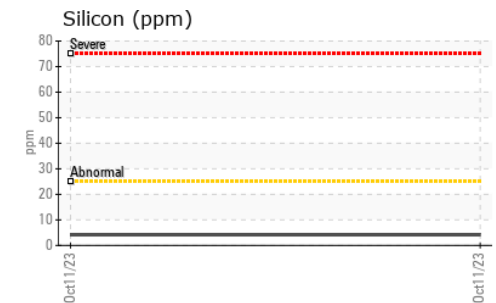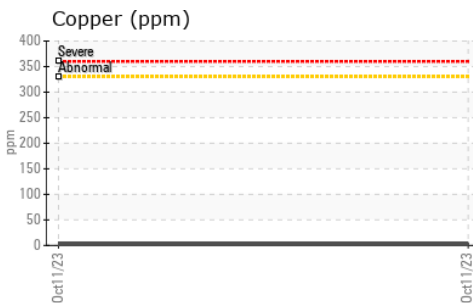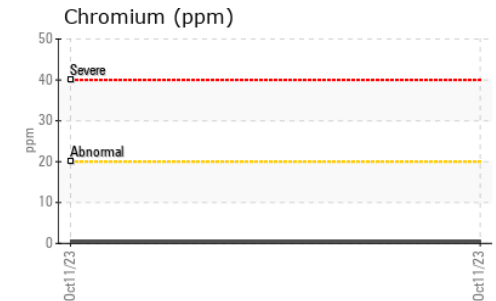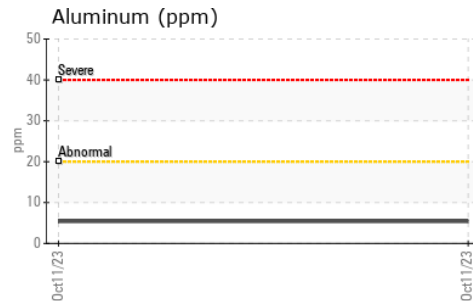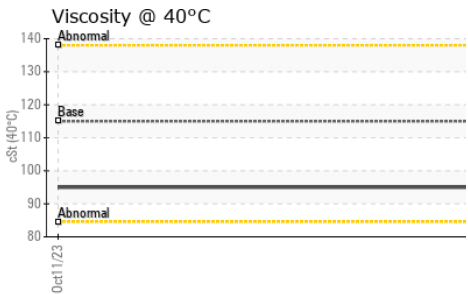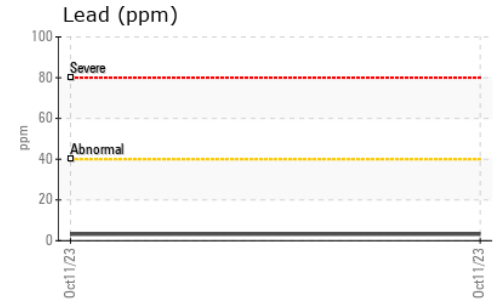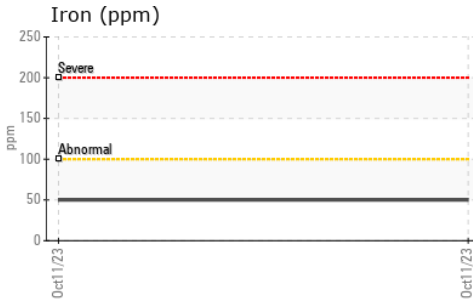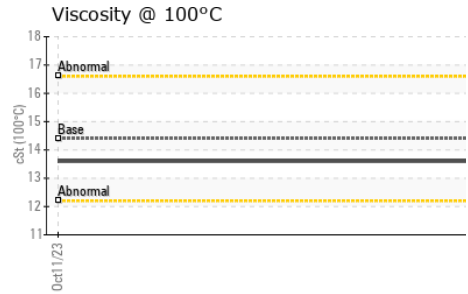

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081379 **Received** : 30 Oct 2023
Lab Number : **02592797** **Diagnosed** : 31 Oct 2023
Unique Number : 5669876 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol, KV40, VI)

ICSB - Brantford
 567 Oak Park Rd.
 Brantford, ON
 CA N3T 5L8
 Contact: Doug Hall
 Djhall@sharpbus.com
 T: (519)751-3434
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.