

# **OIL ANALYSIS REPORT**

# SHARP BUS LINES **INTERNATIONAL 1162**

Component

**Diesel Engine** 

PETRO CANADA 15W40 (--- GAL)

# Sample Rating Trend



## **DIAGNOSIS**

### Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition


Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

				Aug2023		
SAMPLE INFO	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0081349		
Sample Date		Client Info		18 Aug 2023		
Machine Age	kms	Client Info		202158		
Oil Age	kms	Client Info		3293		
Oil Changed		Client Info		Changed		
Sample Status				SEVERE		
CONTAMINA	TION	method	limit/base	current	history1	history2
Glycol		WC Method		NEG		
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	26		
Chromium	ppm	ASTM D5185(m)	>20	<1		
Nickel	ppm	ASTM D5185(m)	>4	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	>3	<1		
Aluminum	ppm	ASTM D5185(m)	>20	5		
Lead	ppm	ASTM D5185(m)	>40	<1		
Copper	ppm	ASTM D5185(m)	>330	<1		
Tin	ppm	ASTM D5185(m)	>15	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		17		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		43		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		622		
Calcium	ppm	ASTM D5185(m)		728		
Phosphorus	ppm	ASTM D5185(m)		657		
Zinc	ppm	ASTM D5185(m)		759		
Sulfur	ppm	ASTM D5185(m)		1758		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	3		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Fuel	%	ASTM D7593*	>2.0	<b>32.3</b>		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.3		
Nitration	Abs/cm	ASTM D7624*	>20	6.8		
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.3		
FLUID DEGRA	ADATION	method	limit/base	current	history1	history2
Outdetter	Ale a / durino	ACTM D7414*	. 05	10.0		

Oxidation



# **OIL ANALYSIS REPORT**

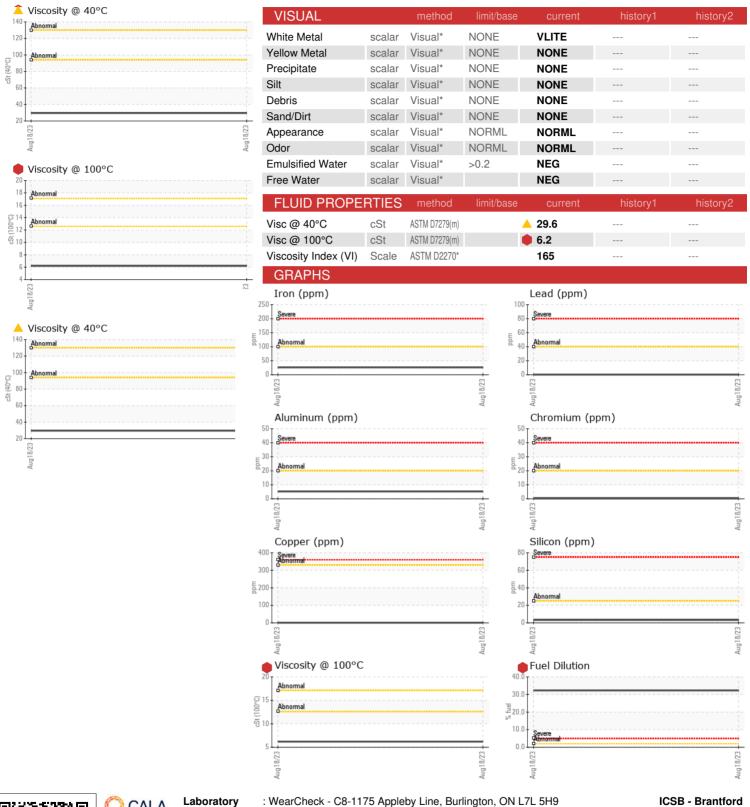



CALA ISO 17025:2017 Accredited

Laboratory Sample No. Lab Number **Unique Number** 

: 02592805

: PC0081349

: 5669884

Received : 30 Oct 2023 Diagnosed : 31 Oct 2023

Diagnostician : Wes Davis

Test Package : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI, Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

**ICSB - Brantford** 567 Oak Park Rd. Brantford, ON CA N3T 5L8 Contact: Doug Hall Djhall@sharpbus.com T: (519)751-3434