

Machine Id
TK19

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0078201	PC0054306	PC0029091
Sample Date	Client Info			24 Oct 2023	01 Feb 2022	11 Feb 2021
Machine Age	kms	Client Info		8146	5593	4400
Oil Age	kms	Client Info		1500	1000	4400
Oil Changed	Client Info			Not Chngd	Not Chngd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Glycol	WC Method			NEG	NEG	0.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	9	14	43
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	2
Nickel	ppm	ASTM D5185(m)	>4	0	<1	2
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	<1	<1	2
Aluminum	ppm	ASTM D5185(m)	>20	2	4	15
Lead	ppm	ASTM D5185(m)	>40	<1	0	1
Copper	ppm	ASTM D5185(m)	>330	4	10	51
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	3	14	119
Barium	ppm	ASTM D5185(m)	10	<1	0	1
Molybdenum	ppm	ASTM D5185(m)	100	65	53	10
Manganese	ppm	ASTM D5185(m)		0	<1	2
Magnesium	ppm	ASTM D5185(m)	450	1064	904	134
Calcium	ppm	ASTM D5185(m)	3000	1176	1133	1994
Phosphorus	ppm	ASTM D5185(m)	1150	1121	1074	955
Zinc	ppm	ASTM D5185(m)	1350	1348	1209	1184
Sulfur	ppm	ASTM D5185(m)	4250	2924	2716	3024
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	5	15	19
Sodium	ppm	ASTM D5185(m)	>158	2	2	3
Potassium	ppm	ASTM D5185(m)	>20	3	8	23


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.1	0	0.3
Nitration	Abs/cm	ASTM D7624*	>20	6.2	6.5	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.4	19.9	22.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.2	14.6	17.8

OIL ANALYSIS REPORT








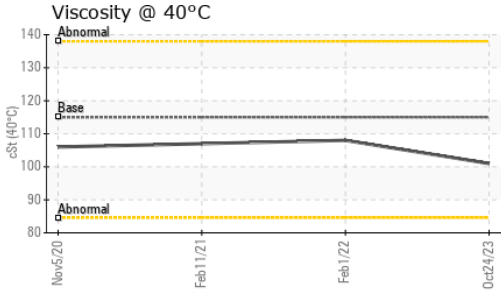


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

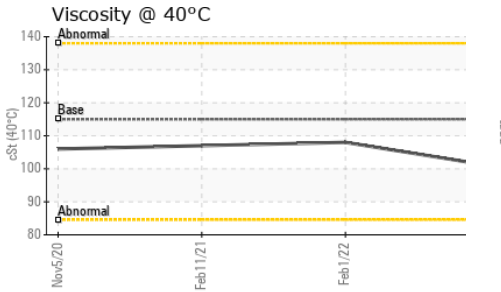

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	101	108
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.1	14.5
Viscosity Index (VI)	Scale	ASTM D2270*	126	142	137

GRAPHS

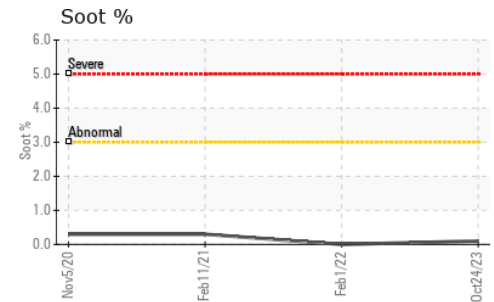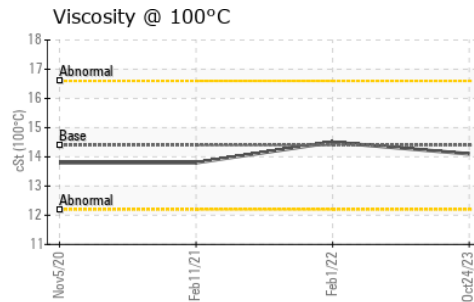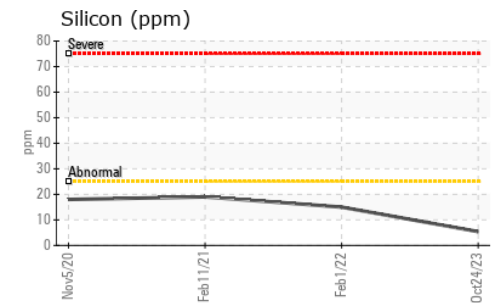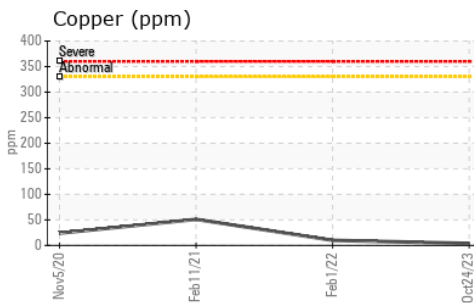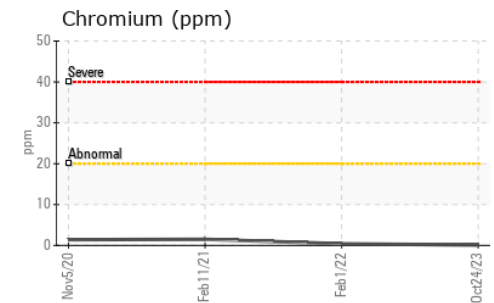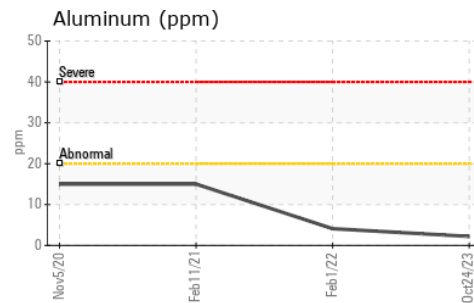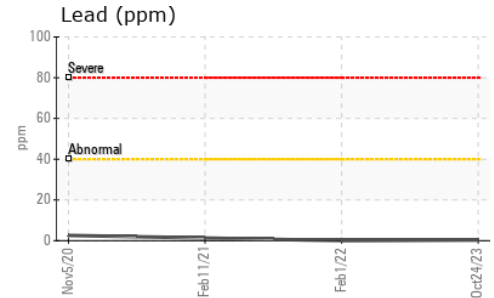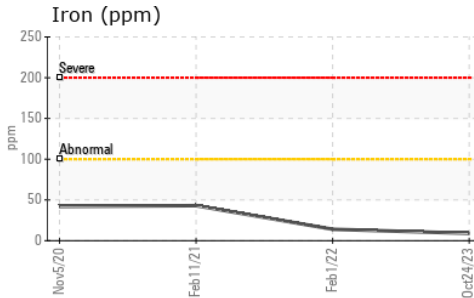

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078201
Lab Number : 02592902
Unique Number : 5669981
Test Package : MOB 1 (Additional Tests: KV40, VI)

HAMILTON FIRE DEPT
 MECHANICAL DIV., 177 BAY STREET NORTH
 HAMILTON, ON
 CA L8R 2P8
 Contact: Jenny-Lynn Pellegrino
 jenny-lynn.pellegrino@hamilton.ca
 T: (905)546-2424
 F: (905)961-9116

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*