


# OIL ANALYSIS REPORT

Sample Rating Trend

**WEAR**



Machine Id  
**812051**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

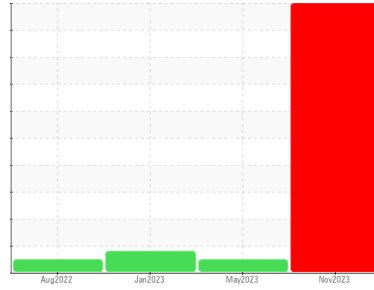

## DIAGNOSIS

### Recommendation

Nous vous recommandons de vidanger le fluide de ce composant si vous ne l'avez pas déjà fait. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiquent que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

### Wear

Il y a indication d'usure du convertisseur de couple. Le bas indice ferreux (PQ) indique que l'usure ferreuse est due à de la corrosion.

### Contamination

Il n'y a aucun indice de contamination dans le fluide.

### Fluid Condition

le fluide n'est plus en état de service en raison d'une usure anormale et/ou sévère.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>PC0077978</b>   | PC0073206   | PC0066860   |
| Sample Date   | Client Info |             | <b>01 Nov 2023</b> | 08 May 2023 | 24 Jan 2023 |
| Machine Age   | kms         | Client Info | <b>55249</b>       | 44383       | 38469       |
| Oil Age       | kms         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | Not Changd  | Not Changd  |
| Sample Status |             |             | <b>SEVERE</b>      | NORMAL      | ATTENTION   |

## WEAR METALS

|           | method      | limit/base         | current      | history1 | history2 |
|-----------|-------------|--------------------|--------------|----------|----------|
| PQ        | ASTM D8184* | >50                | <b>0</b>     | ---      | ---      |
| Iron      | ppm         | ASTM D5185(m) >160 | <b>304</b>   | 108      | 127      |
| Chromium  | ppm         | ASTM D5185(m) >5   | <b>&lt;1</b> | <1       | <1       |
| Nickel    | ppm         | ASTM D5185(m) >5   | <b>1</b>     | <1       | <1       |
| Titanium  | ppm         | ASTM D5185(m)      | <b>0</b>     | <1       | 0        |
| Silver    | ppm         | ASTM D5185(m) >5   | <b>&lt;1</b> | 0        | 0        |
| Aluminum  | ppm         | ASTM D5185(m) >50  | <b>110</b>   | 67       | 80       |
| Lead      | ppm         | ASTM D5185(m) >50  | <b>34</b>    | 35       | 13       |
| Copper    | ppm         | ASTM D5185(m) >225 | <b>29</b>    | 21       | 50       |
| Tin       | ppm         | ASTM D5185(m) >10  | <b>4</b>     | 5        | 3        |
| Antimony  | ppm         | ASTM D5185(m)      | <b>0</b>     | 0        | <1       |
| Vanadium  | ppm         | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Beryllium | ppm         | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |
| Cadmium   | ppm         | ASTM D5185(m)      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base    | current      | history1 | history2 |
|------------|--------|---------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) | <b>73</b>    | 70       | 106      |
| Barium     | ppm    | ASTM D5185(m) | <b>&lt;1</b> | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185(m) | <b>&lt;1</b> | <1       | <1       |
| Manganese  | ppm    | ASTM D5185(m) | <b>4</b>     | 2        | 2        |
| Magnesium  | ppm    | ASTM D5185(m) | <b>&lt;1</b> | 2        | <1       |
| Calcium    | ppm    | ASTM D5185(m) | <b>63</b>    | 56       | 88       |
| Phosphorus | ppm    | ASTM D5185(m) | <b>269</b>   | 263      | 330      |
| Zinc       | ppm    | ASTM D5185(m) | <b>14</b>    | 11       | 14       |
| Sulfur     | ppm    | ASTM D5185(m) | <b>974</b>   | 754      | 1347     |
| Lithium    | ppm    | ASTM D5185(m) | <b>&lt;1</b> | <1       | <1       |

## CONTAMINANTS


|           | method | limit/base        | current   | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >20 | <b>18</b> | 11       | 13       |
| Sodium    | ppm    | ASTM D5185(m)     | <b>19</b> | 39       | 11       |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>6</b>  | 4        | 4        |

## VISUAL


|                  | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Silt             | scalar | Visual*    | NONE    | NONE     | NONE     |
| Debris           | scalar | Visual*    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | NONE     |
| Appearance       | scalar | Visual*    | NORML   | NORML    | NORML    |
| Odor             | scalar | Visual*    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | Visual*    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | Visual*    | NEG     | NEG      | NEG      |

# OIL ANALYSIS REPORT


## Ferrous Alloys

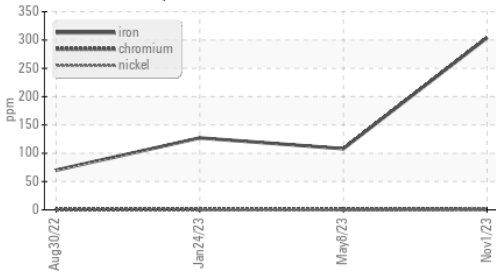


## Viscosity @ 100°C

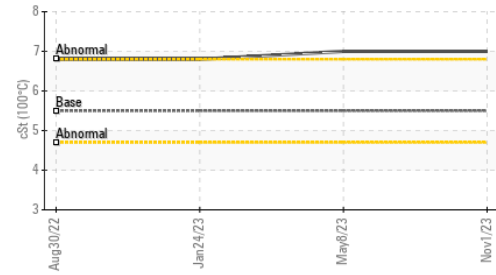


## Viscosity @ 100°C

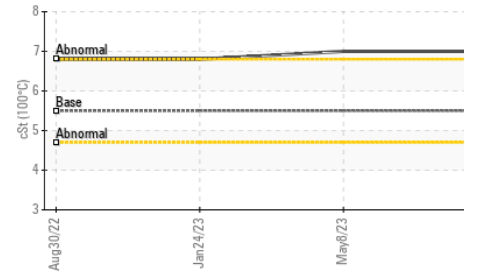

## Viscosity @ 40°C

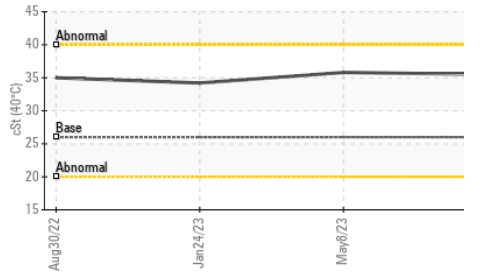


## PQ

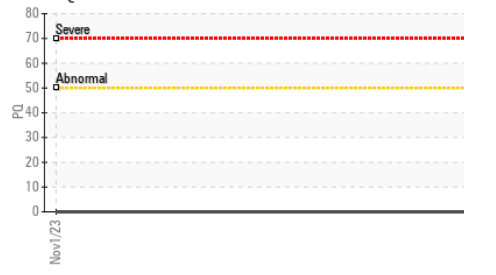

## FLUID PROPERTIES


| Property             | Method | Limit/Base    | Current | History1 | History2 |
|----------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C          | cSt    | ASTM D7279(m) | 26.0    | 35.8     | 34.2     |
| Visc @ 100°C         | cSt    | ASTM D7279(m) | 5.5     | 7        | 6.8      |
| Viscosity Index (VI) | Scale  | ASTM D2270*   | 155     | 160      | 161      |

## SAMPLE IMAGES

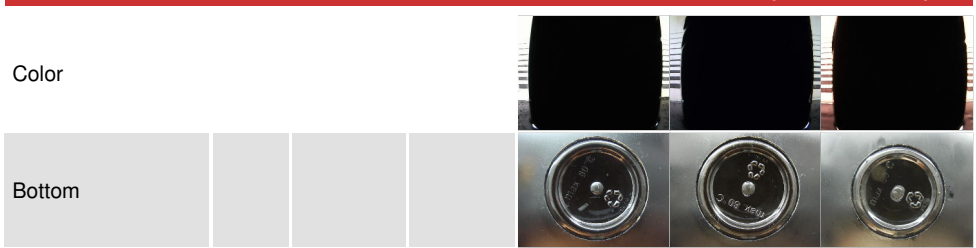


## GRAPHS


### Iron (ppm)

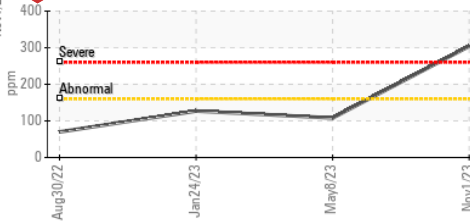


### Lead (ppm)

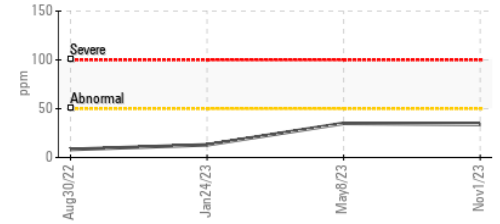


### Aluminum (ppm)

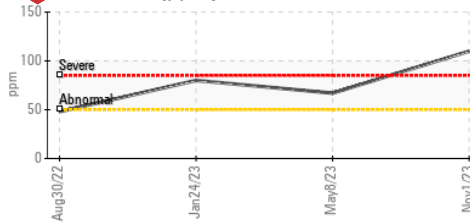


### Chromium (ppm)

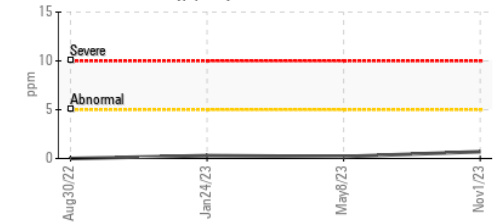


### Copper (ppm)

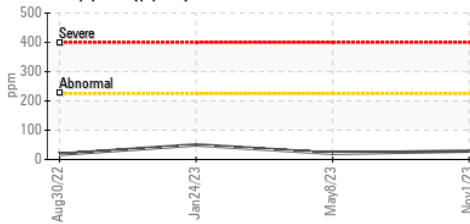


### Silicon (ppm)

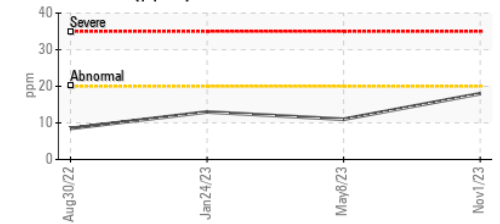

### Viscosity @ 40°C

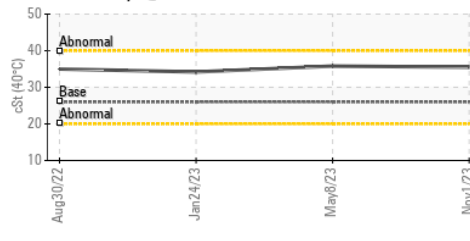

### PQ

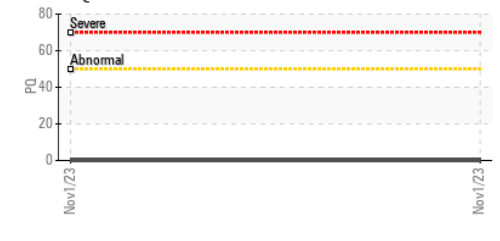

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 737 - Quebec City Hauling  
**Sample No.** : PC0077978  
**Lab Number** : 02593967  
**Unique Number** : 5671046  
**Test Package** : MOB 1 ( Additional Tests: KV100, PQ, VI )

**Received** : 03 Nov 2023  
**Diagnosed** : 03 Nov 2023  
**Diagnostician** : Kevin Marson

6205 Boul. Wilfrid Hamel,  
Quebec City, QC  
CA G2E 5G8  
Contact: Dave Beaulieu  
davebeaulieu@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: