

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
NO UNIT PC0075231
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 15W40. Please confirm.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0075231	---	---
Sample Date	Client Info		05 Nov 2023	---	---
Machine Age	mths	Client Info	0	---	---
Oil Age	mths	Client Info	6	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	33	---
Chromium	ppm	ASTM D5185(m)	>20	1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	---
Titanium	ppm	ASTM D5185(m)	>2	0	---
Silver	ppm	ASTM D5185(m)	>2	<1	---
Aluminum	ppm	ASTM D5185(m)	>30	3	---
Lead	ppm	ASTM D5185(m)	>30	8	---
Copper	ppm	ASTM D5185(m)	>30	2	---
Tin	ppm	ASTM D5185(m)	>15	<1	---
Antimony	ppm	ASTM D5185(m)		0	---
Vanadium	ppm	ASTM D5185(m)		0	---
Beryllium	ppm	ASTM D5185(m)		0	---
Cadmium	ppm	ASTM D5185(m)		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	14	---
Barium	ppm	ASTM D5185(m)	10	<1	---
Molybdenum	ppm	ASTM D5185(m)	100	63	---
Manganese	ppm	ASTM D5185(m)		0	---
Magnesium	ppm	ASTM D5185(m)	450	1007	---
Calcium	ppm	ASTM D5185(m)	3000	1024	---
Phosphorus	ppm	ASTM D5185(m)	1150	1004	---
Zinc	ppm	ASTM D5185(m)	1350	1217	---
Sulfur	ppm	ASTM D5185(m)	4250	2598	---
Lithium	ppm	ASTM D5185(m)		<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	3	---
Sodium	ppm	ASTM D5185(m)	>158	3	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	1.1	---
Nitration	Abs/cm	ASTM D7624*	>20	9.0	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.9	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.9	---









OIL ANALYSIS REPORT

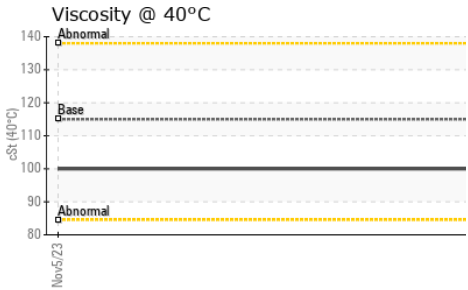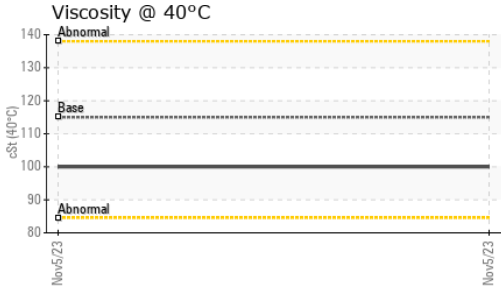

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	100	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	134	---	---

GRAPHS

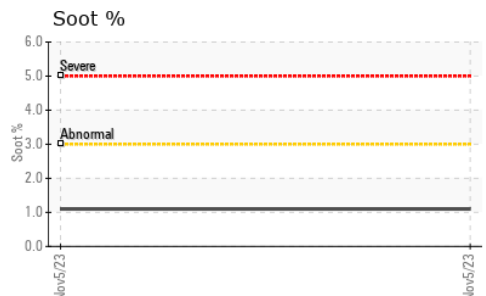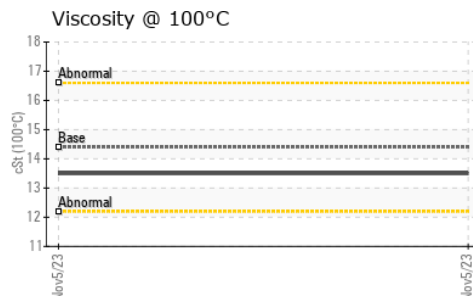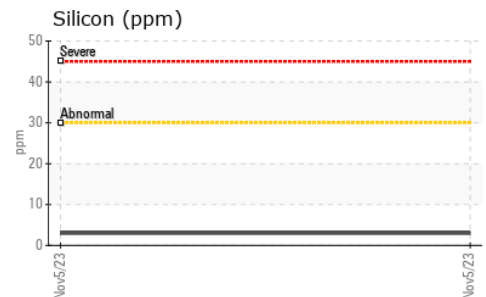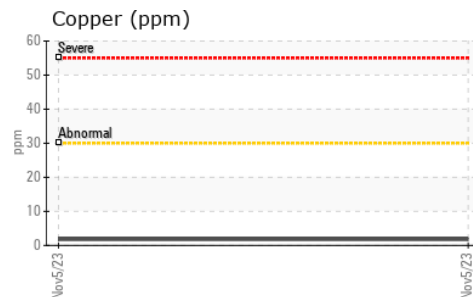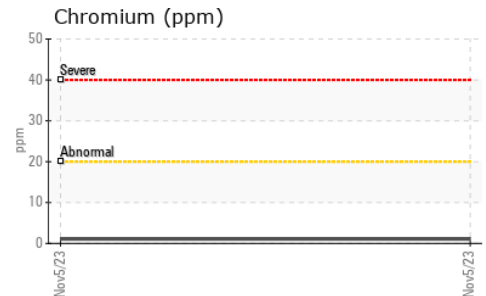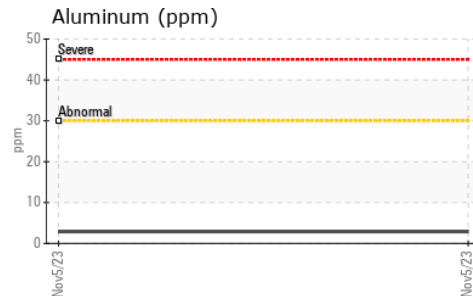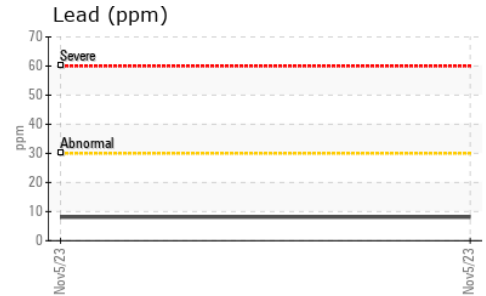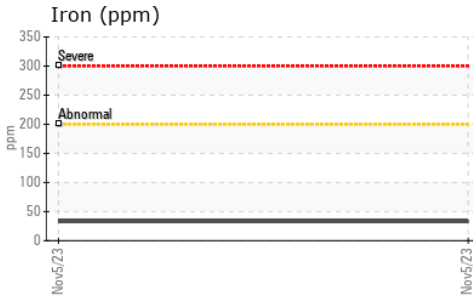

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0075231 **Received** : 06 Nov 2023
Lab Number : **02594127** **Diagnosed** : 06 Nov 2023
Unique Number : 5671206 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

TORONTO FIRE SERVICES
 40 TORYORK DRIVE
 TORONTO, ON
 CA M9L 1X6
 Contact: Eric Landman
 elandma@toronto.ca
 T: (416)338-9237
 F: (416)540-7729

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.