

Machine Id
2010 SPARTAN 25034 P333

Component
Right Diesel Engine

Fluid
CASTROL HYPURON 15W40 (25 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | PC0075293 | AP103378 | AP104318 |
| Sample Date | Client Info | | | 23 Jun 2023 | 01 May 2018 | 08 Feb 2017 |
| Machine Age | kms | Client Info | | 161446 | 77042 | 41048 |
| Oil Age | kms | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >3.0 | | <1.0 | <1.0 | <1.0 |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >75 | 46 | 20 | 7 |
| Chromium | ppm | ASTM D5185(m) | >5 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >4 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | <1 | <1 |
| Silver | ppm | ASTM D5185(m) | >2 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >15 | 2 | 3 | 2 |
| Lead | ppm | ASTM D5185(m) | >25 | <1 | 3 | 1 |
| Copper | ppm | ASTM D5185(m) | >100 | 2 | 2 | <1 |
| Tin | ppm | ASTM D5185(m) | >4 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 1 | 2 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | <1 | 0 |



| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | | 12 | 31 | 52 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) | | 63 | 4 | <1 |
| Manganese | ppm | ASTM D5185(m) | | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | | 997 | 11 | 10 |
| Calcium | ppm | ASTM D5185(m) | | 1021 | 2304 | 2484 |
| Phosphorus | ppm | ASTM D5185(m) | | 1012 | 942 | 1052 |
| Zinc | ppm | ASTM D5185(m) | | 1219 | 1176 | 1270 |
| Sulfur | ppm | ASTM D5185(m) | | 2465 | 3249 | 3622 |
| Lithium | ppm | ASTM D5185(m) | | <1 | 0 | <1 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >25 | 11 | 6 | 6 |
| Sodium | ppm | ASTM D5185(m) | | 15 | 2 | 2 |
| Potassium | ppm | ASTM D5185(m) | >20 | 2 | 2 | 2 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | >6 | 1.2 | 0.8 | 0.2 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 15.8 | 13.4 | 9.3 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 31.1 | 29.9 | 24.2 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 32.8 | 27.5 | 18.7 |









OIL ANALYSIS REPORT

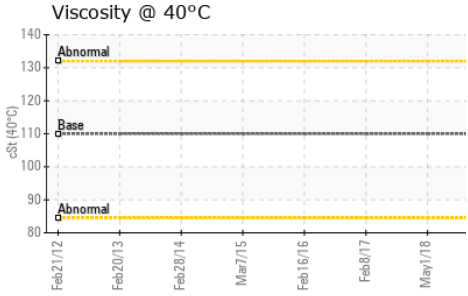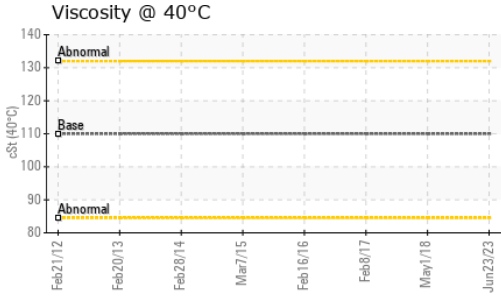

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|------------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 110 | 117 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.0 | 15.1 | 14.6 | 15.1 |
| Viscosity Index (VI) | Scale | ASTM D2270* | 140 | 133 | --- | --- |

GRAPHS

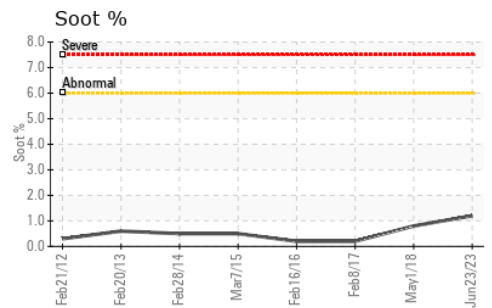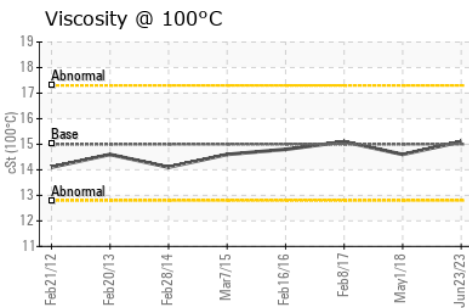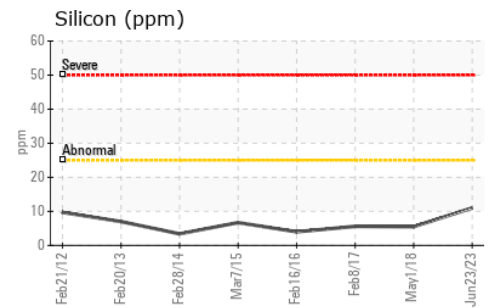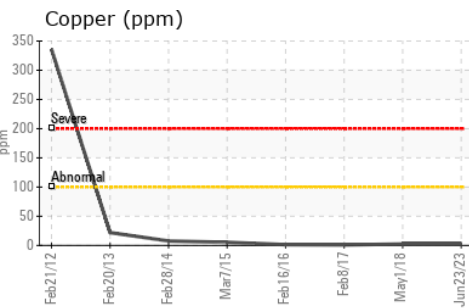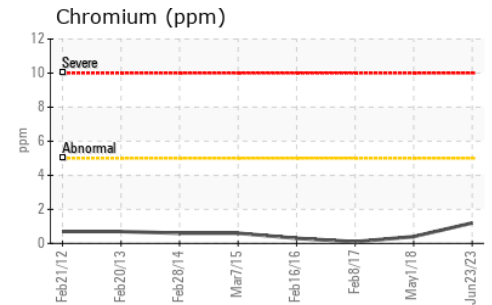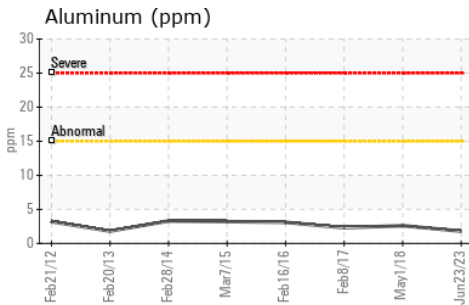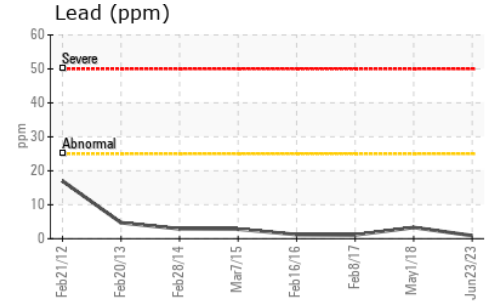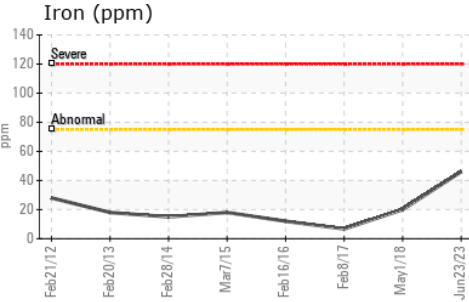

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0075293 **Received** : 06 Nov 2023
Lab Number : 02594141 **Diagnosed** : 06 Nov 2023
Unique Number : 5671220 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: KV40, VI)

TORONTO FIRE SERVICES
 40 TORYORK DRIVE
 TORONTO, ON
 CA M9L 1X6
 Contact: Antonio Rodrigues
 antonio.rodrigues@tonroto.ca
 T:
 F: (416)338-9207

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.