

Machine Id

**KM9**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 46 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0069628</b>	PC0058291	PC408422
Sample Date	Client Info			<b>02 Nov 2023</b>	30 May 2022	17 Feb 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>75	<b>3</b>	2	2
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<b>1</b>	2	2
Barium	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	25	<b>3</b>	3	4
Calcium	ppm	ASTM D5185(m)	200	<b>50</b>	54	57
Phosphorus	ppm	ASTM D5185(m)	300	<b>304</b>	324	315
Zinc	ppm	ASTM D5185(m)	370	<b>366</b>	382	367
Sulfur	ppm	ASTM D5185(m)	2500	<b>770</b>	770	809
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1105</b>	▲ 6790	▲ 7954	
Particles >6µm	ASTM D7647	>1300	<b>370</b>	▲ 1461	1065	
Particles >14µm	ASTM D7647	>160	<b>50</b>	56	46	
Particles >21µm	ASTM D7647	>40	<b>18</b>	7	11	
Particles >38µm	ASTM D7647	>10	<b>3</b>	0	0	
Particles >71µm	ASTM D7647	>3	<b>1</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/16/13</b>	▲ 20/18/13	▲ 20/17/13	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	<b>0.28</b>	0.28	0.31

# OIL ANALYSIS REPORT

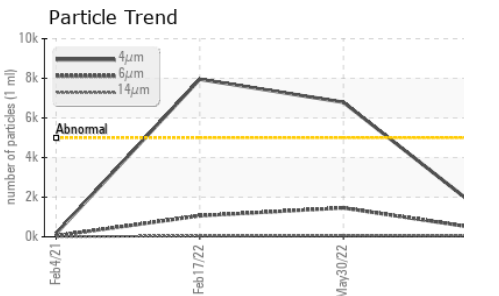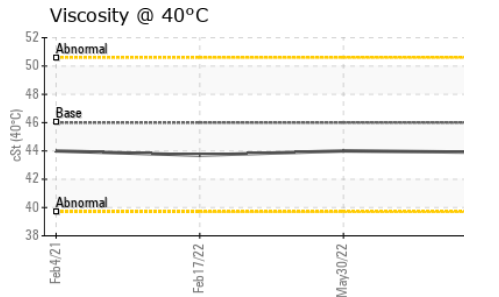
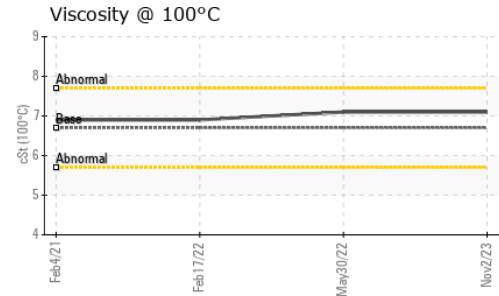
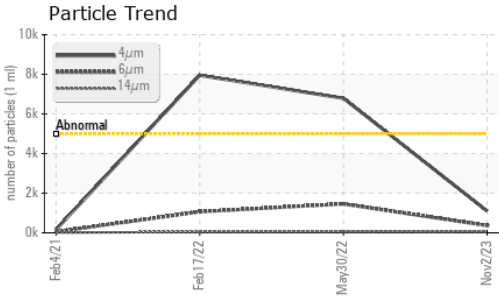
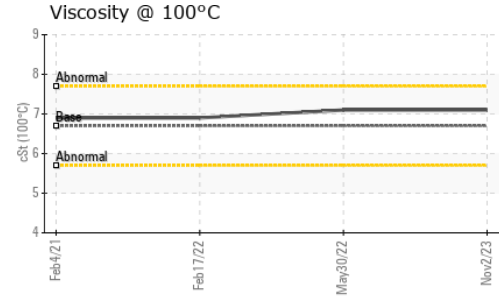


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	▲ LIGHT
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	.5%
Free Water	scalar	Visual*		NEG	▲ 1%

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	43.9	44.0
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	7.1	7.1
Viscosity Index (VI)	Scale	ASTM D2270*	97	121	121

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

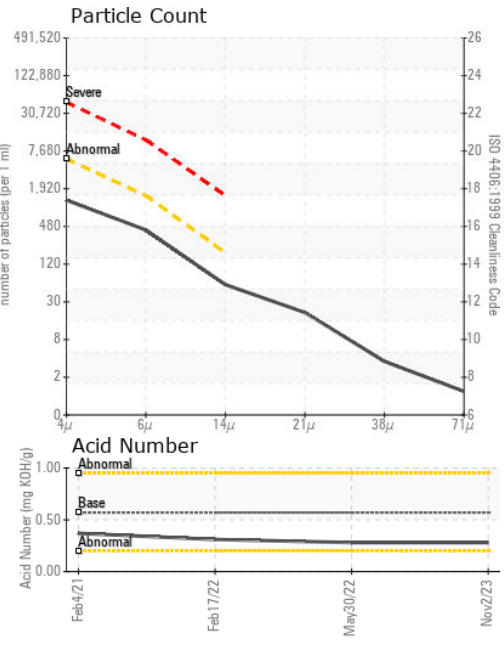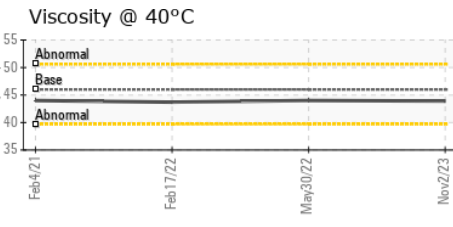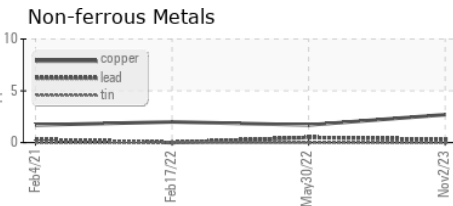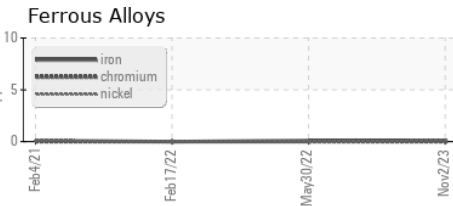

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0069628 **Received** : 07 Nov 2023  
**Lab Number** : 02594627 **Diagnosed** : 08 Nov 2023  
**Unique Number** : 5671706 **Diagnostician** : Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

**ELRINGKLINGER CANADA INC**  
 1 SENECA ROAD, R.R. #4  
 LEAMINGTON, ON  
 CA N8H 5P2  
 Contact: Dave Fawdry  
 david.fawdry@elringklinger.ca  
 T: (519)326-6113  
 F: (519)326-6327

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.