




OIL ANALYSIS REPORT

Sample Rating Trend

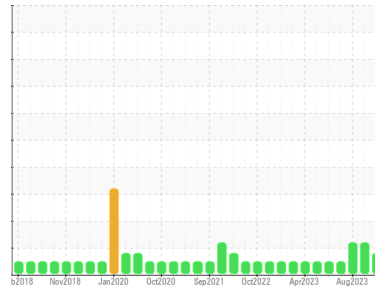

FUEL



Machine Id
701021
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (22 LTR)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097564	GFL0088950	GFL0088937
Sample Date	Client Info	04 Nov 2023	27 Sep 2023	16 Aug 2023
Machine Age	hrs	18726	18135	17529
Oil Age	hrs	591	606	186
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >75	11	13	8
Chromium	ppm	ASTM D5185(m) >5	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >4	0	0	0
Titanium	ppm	ASTM D5185(m) >2	0	0	<1
Silver	ppm	ASTM D5185(m) >2	<1	<1	0
Aluminum	ppm	ASTM D5185(m) >15	6	9	10
Lead	ppm	ASTM D5185(m) >25	0	0	0
Copper	ppm	ASTM D5185(m) >100	<1	<1	<1
Tin	ppm	ASTM D5185(m) >4	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	5	4	5
Barium	ppm	ASTM D5185(m) 0	<1	<1	0
Molybdenum	ppm	ASTM D5185(m) 60	55	58	55
Manganese	ppm	ASTM D5185(m) 0	0	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	885	915	906
Calcium	ppm	ASTM D5185(m) 1070	998	1013	992
Phosphorus	ppm	ASTM D5185(m) 1150	906	958	1014
Zinc	ppm	ASTM D5185(m) 1270	1114	1147	1117
Sulfur	ppm	ASTM D5185(m) 2060	2368	2406	2495
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	5	4	3
Sodium	ppm	ASTM D5185(m)	4	6	4
Potassium	ppm	ASTM D5185(m) >20	9	17	19
Fuel	%	ASTM D7593* >3.0	▲ 4.2	▲ 4.9	▲ 4.8

INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >6	0.2	0.3	0.1
Nitration	Abs/cm	ASTM D7624* >20	7.9	9.8	7.4
Sulfation	Abs/.1mm	ASTM D7415* >30	19.6	20.3	19.5

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414* >25	16.8	18.0	14.8











OIL ANALYSIS REPORT

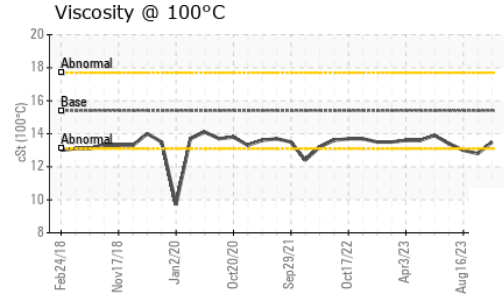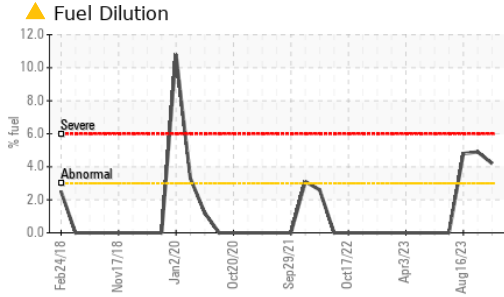

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	▲ 12.8 ▲ 13.0

GRAPHS

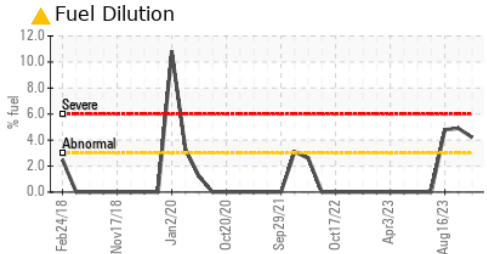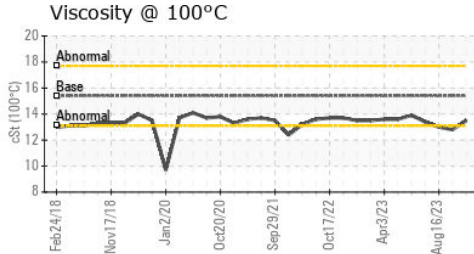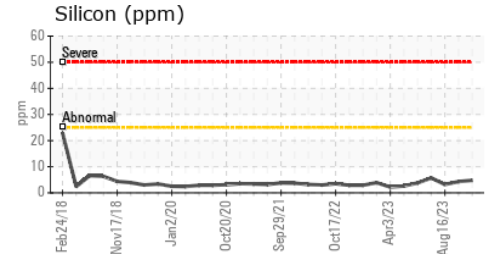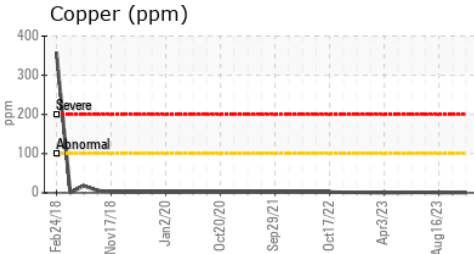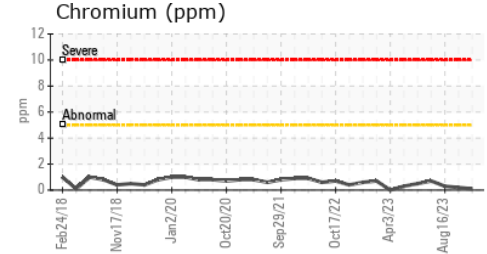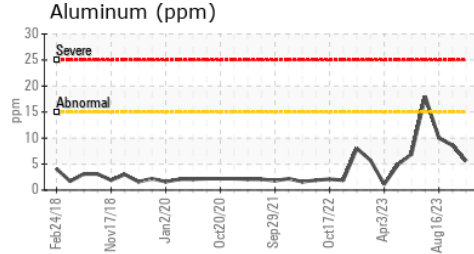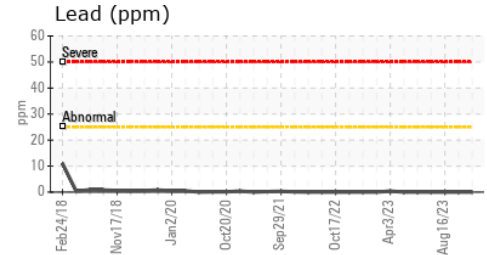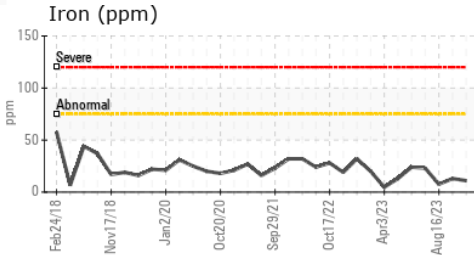

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0097564 **Received** : 09 Nov 2023
Lab Number : 02595299 **Diagnosed** : 10 Nov 2023
Unique Number : 5672378 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, Visual)

GFL Environmental - 216
 15 Bermondsey Road, Building B
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.