




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
7827
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

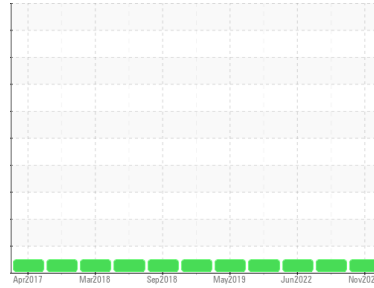

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0097614	GFL0077996	GFL0054202
Sample Date	Client Info		03 Nov 2023	17 May 2023	13 Jun 2022
Machine Age	hrs	Client Info	15921	15617	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	16	4	13
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>20	4	2	3
Lead	ppm	ASTM D5185(m)	>40	<1	<1	1
Copper	ppm	ASTM D5185(m)	>330	1	<1	2
Tin	ppm	ASTM D5185(m)	>15	<1	<1	1
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	4	6
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	58	58	56
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	939	969	963
Calcium	ppm	ASTM D5185(m)	1050	1013	1071	1074
Phosphorus	ppm	ASTM D5185(m)	995	955	1076	1004
Zinc	ppm	ASTM D5185(m)	1180	1175	1158	1176
Sulfur	ppm	ASTM D5185(m)	2600	2464	2613	2495
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	3	17
Sodium	ppm	ASTM D5185(m)		3	4	5
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	3

INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.2	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	7.4	6.0	8.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.8	18.7	21.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.8	14.9	16.6











OIL ANALYSIS REPORT

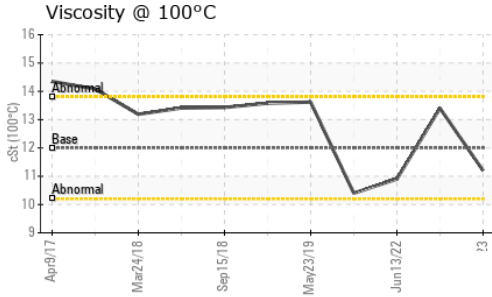

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.2	13.4

GRAPHS

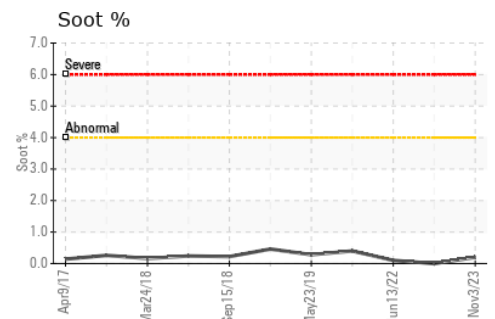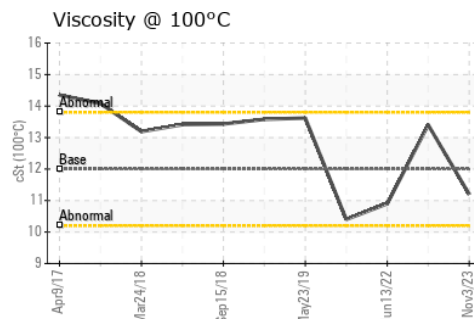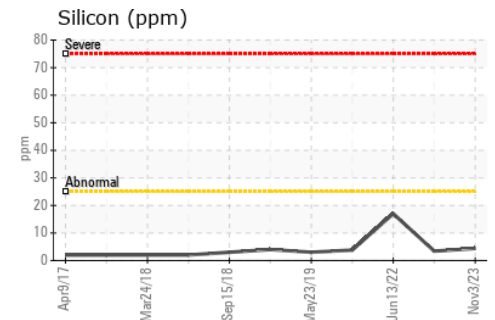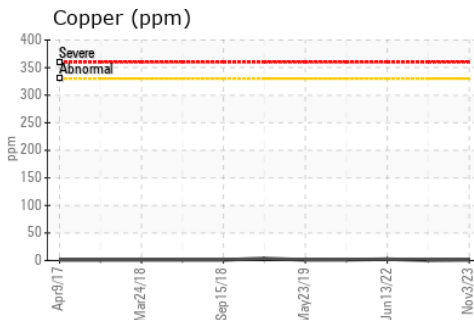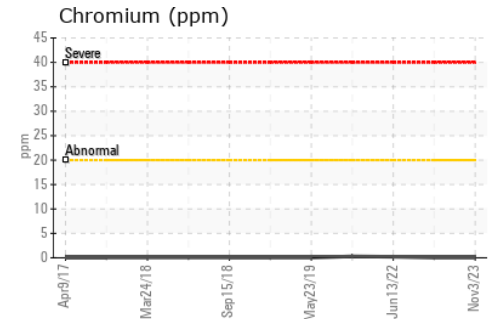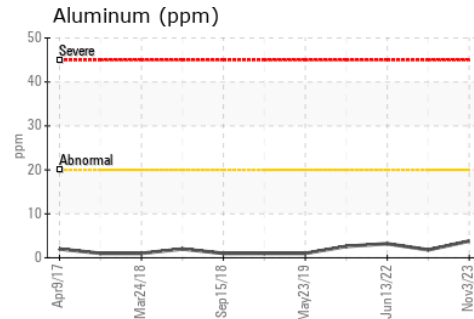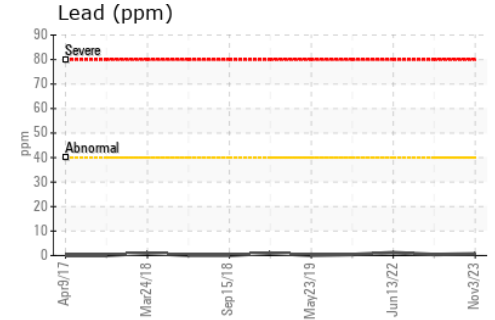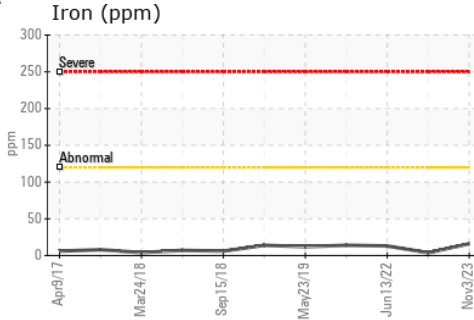

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 554 - Edmonton SW
Sample No. : GFL0097614 **Received** : 13 Nov 2023
Lab Number : 02595721 **Diagnosed** : 13 Nov 2023
Unique Number : 5672800 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Tim Greig
 tgreig@gflenv.com
 T: (780)231-0521
 F: