




OIL ANALYSIS REPORT

Sample Rating Trend

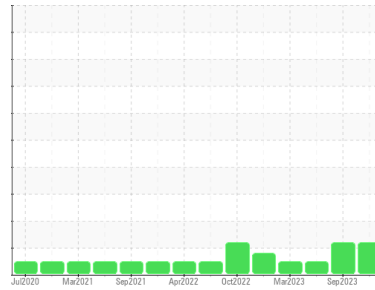

FUEL



Machine Id
925008
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0097321	GFL0090863	GFL0082571
Sample Date	Client Info		14 Nov 2023	15 Sep 2023	06 Jun 2023
Machine Age	kms	Client Info	0	0	251549
Oil Age	kms	Client Info	16081	15690	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	11	18	21
Chromium	ppm	ASTM D5185(m) >20	0	<1	<1
Nickel	ppm	ASTM D5185(m) >5	<1	<1	<1
Titanium	ppm	ASTM D5185(m) >2	0	0	<1
Silver	ppm	ASTM D5185(m) >2	<1	0	0
Aluminum	ppm	ASTM D5185(m) >20	2	2	2
Lead	ppm	ASTM D5185(m) >40	<1	1	2
Copper	ppm	ASTM D5185(m) >330	<1	<1	2
Tin	ppm	ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	<1
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	39	25	4
Barium	ppm	ASTM D5185(m) 0	<1	0	0
Molybdenum	ppm	ASTM D5185(m) 60	40	38	60
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 1010	485	481	954
Calcium	ppm	ASTM D5185(m) 1070	1622	1602	1134
Phosphorus	ppm	ASTM D5185(m) 1150	694	743	1081
Zinc	ppm	ASTM D5185(m) 1270	830	824	1204
Sulfur	ppm	ASTM D5185(m) 2060	1940	1936	2507
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	1	5	3
Sodium	ppm	ASTM D5185(m)	2	2	2
Potassium	ppm	ASTM D5185(m) >20	0	<1	<1
Fuel	%	ASTM D7593* >3.0	▲ 3.4	▲ 3.1	<1.0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0.2	0.3	0.8
Nitration	Abs/cm	ASTM D7624* >20	7.7	9.1	7.9
Sulfation	Abs/.1mm	ASTM D7415* >30	22.5	22.5	20.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	20.5	21.6	14.3




OIL ANALYSIS REPORT

▲ Fuel Dilution

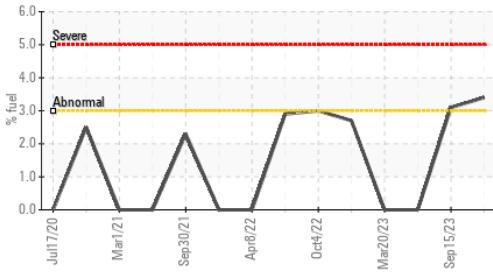

▲ Viscosity @ 100°C

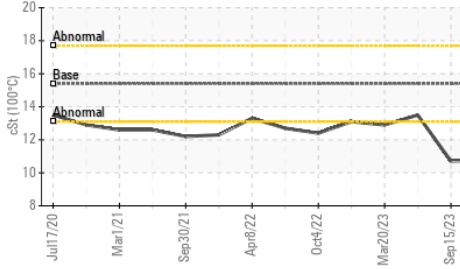

VISUAL


	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 10.8	▲ 10.7

GRAPHS


Iron (ppm)

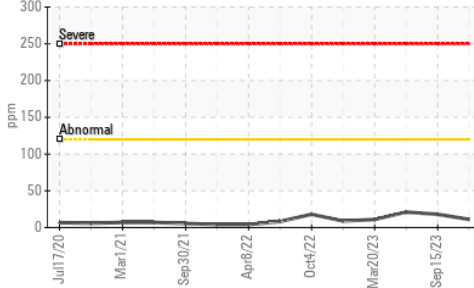


Lead (ppm)

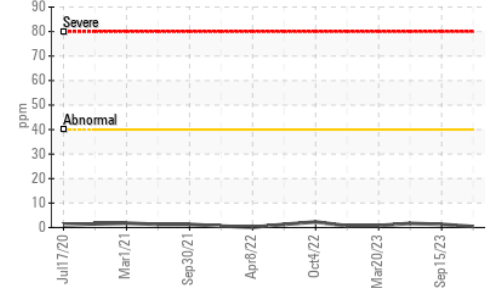


Aluminum (ppm)

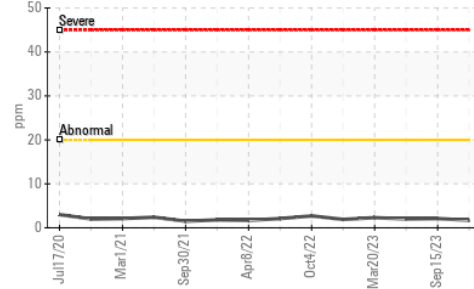


Chromium (ppm)

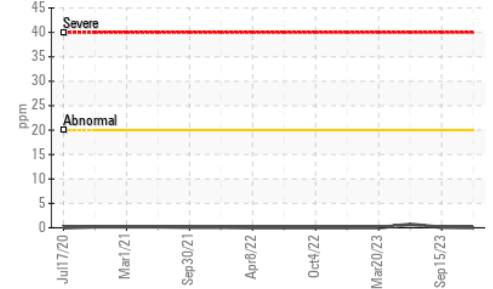


Copper (ppm)

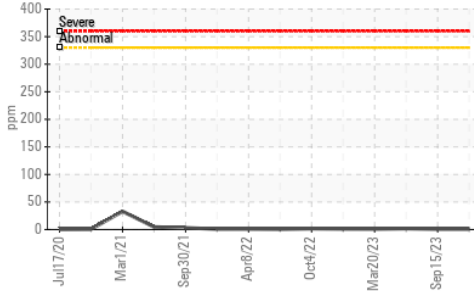


Silicon (ppm)

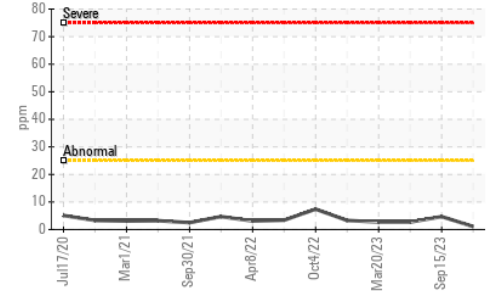

▲ Viscosity @ 100°C

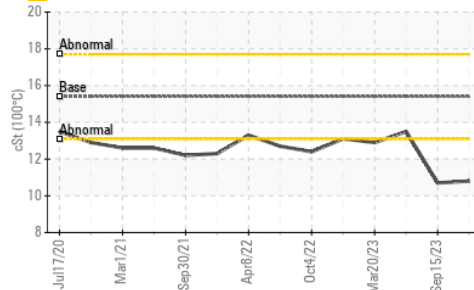

▲ Fuel Dilution

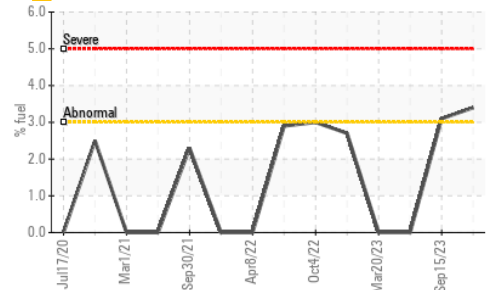

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 246 - Windsor**
Sample No. : GFL0097321 **Received** : 15 Nov 2023
Lab Number : 02596447 **Diagnosed** : 16 Nov 2023
Unique Number : 5681527 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

2700 Deziel Dr
Windsor, ON
CA N8W 5H8
Contact: Dave Varga
dvarga@gflenv.com
T: (519)944-8009
F: