



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
GFL253
Machine Id
231001
Component
Natural Gas Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0094842	---	---
Sample Date	Client Info		27 Sep 2023	---	---
Machine Age	kms	Client Info	13757	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	53	---	---
Chromium	ppm	ASTM D5185(m) >4	2	---	---
Nickel	ppm	ASTM D5185(m) >2	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >3	<1	---	---
Aluminum	ppm	ASTM D5185(m) >9	8	---	---
Lead	ppm	ASTM D5185(m) >30	2	---	---
Copper	ppm	ASTM D5185(m) >35	16	---	---
Tin	ppm	ASTM D5185(m) >4	2	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	18	---	---
Barium	ppm	ASTM D5185(m) 10	3	---	---
Molybdenum	ppm	ASTM D5185(m) 100	86	---	---
Manganese	ppm	ASTM D5185(m)	6	---	---
Magnesium	ppm	ASTM D5185(m) 450	618	---	---
Calcium	ppm	ASTM D5185(m) 3000	1323	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	703	---	---
Zinc	ppm	ASTM D5185(m) 1350	856	---	---
Sulfur	ppm	ASTM D5185(m) 4250	2135	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	26	---	---
Sodium	ppm	ASTM D5185(m) >158	3	---	---
Potassium	ppm	ASTM D5185(m) >20	2	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	---	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	---	---

VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*	NEG	---	---











OIL ANALYSIS REPORT

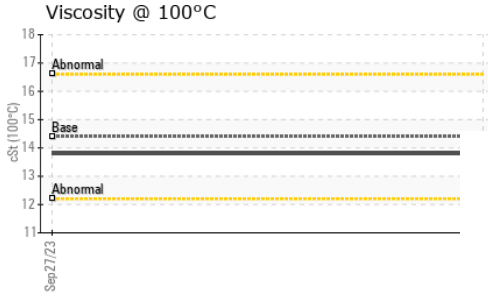

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.8	---	---

GRAPHS

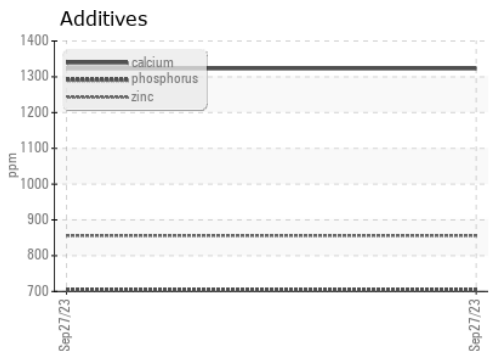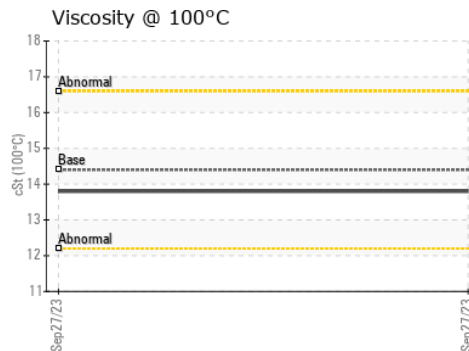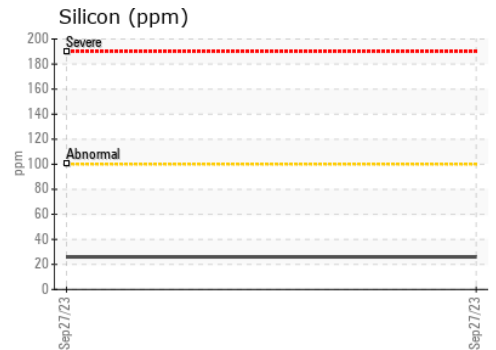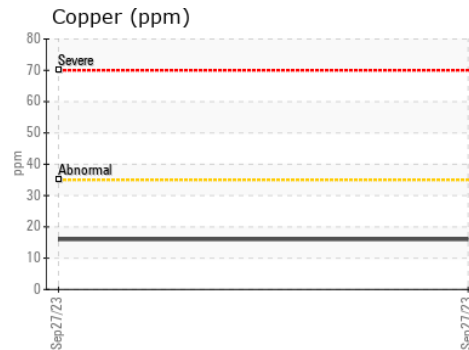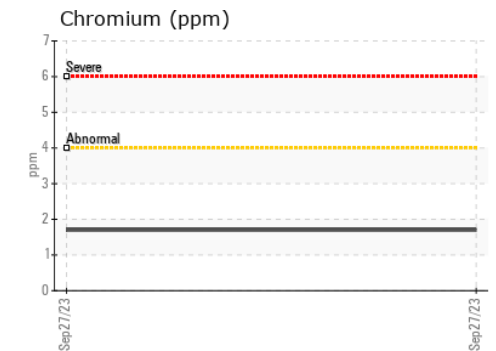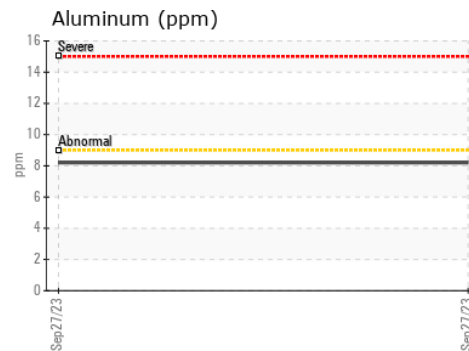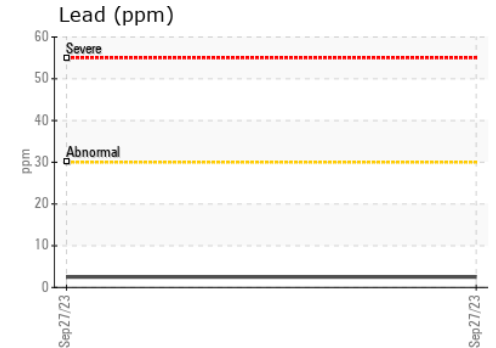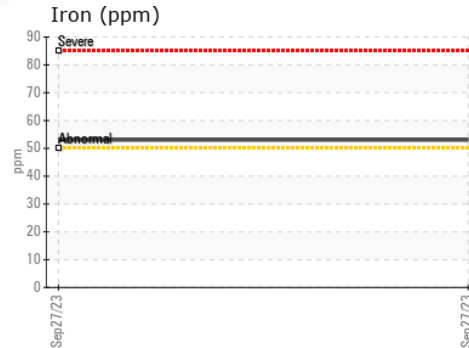

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
 Sample No. : GFL0094842 Received : 16 Nov 2023
 Lab Number : 02596753 Diagnosed : 16 Nov 2023
 Unique Number : 5681833 Diagnostician : Wes Davis
 Test Package : MOB 1

GFL Environmental - 216
 15 Bermondsey Road
 Toronto, ON
 CA M4B 1Y9
 Contact: Tom Hatzioannidis
 thatzioannidis@gflenv.com
 T: (416)678-9340
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.