



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Area
[1176864]
Machine Id
810052

Component
Diesel Engine
Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

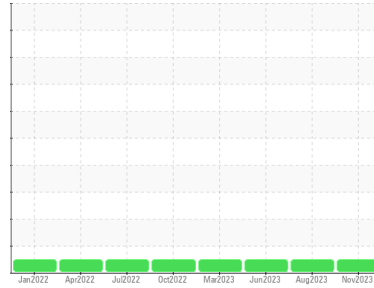

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0093945	GFL0062942	GFL0062922
Sample Date	Client Info		15 Nov 2023	24 Aug 2023	27 Jun 2023
Machine Age	hrs	Client Info	4689	4176	3795
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	27	19	24
Chromium	ppm	ASTM D5185(m)	>20	1	1	2
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	5	4	4
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	2	2	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	5	6	12
Barium	ppm	ASTM D5185(m)	0	<1	0	0
Molybdenum	ppm	ASTM D5185(m)	60	61	58	54
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	965	928	828
Calcium	ppm	ASTM D5185(m)	1070	1098	1078	1180
Phosphorus	ppm	ASTM D5185(m)	1150	1001	1031	1003
Zinc	ppm	ASTM D5185(m)	1270	1222	1167	1159
Sulfur	ppm	ASTM D5185(m)	2060	2464	2455	2435
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	6	7
Sodium	ppm	ASTM D5185(m)		8	7	7
Potassium	ppm	ASTM D5185(m)	>20	9	6	4

INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.5	0.3	0.4
Nitration	Abs/cm	ASTM D7624*	>20	9.3	7.7	9.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.4	20.0	20.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.6	14.4	17.4











OIL ANALYSIS REPORT

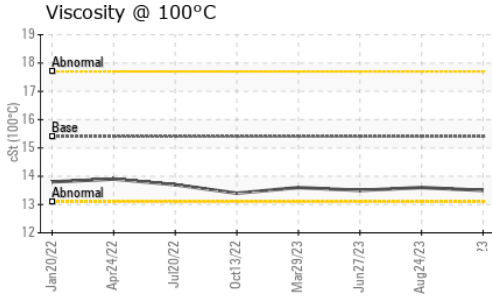

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.5	13.6	13.5

GRAPHS

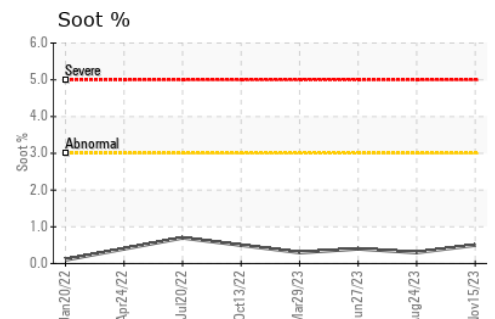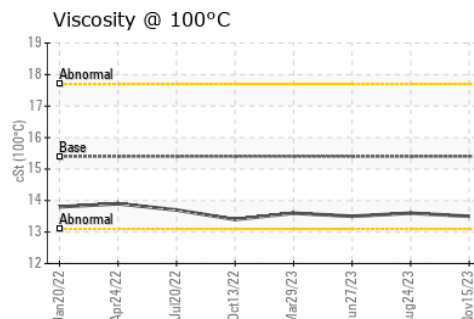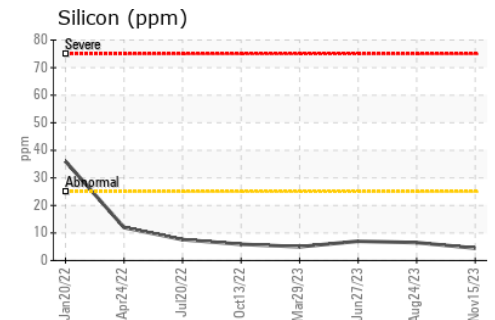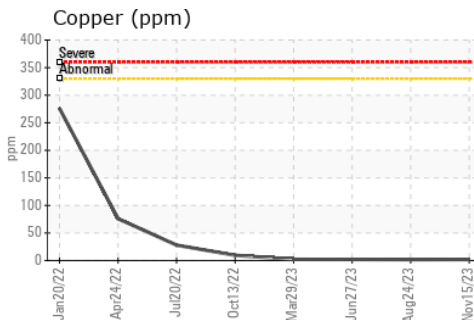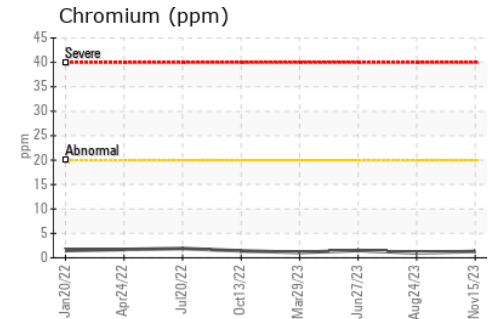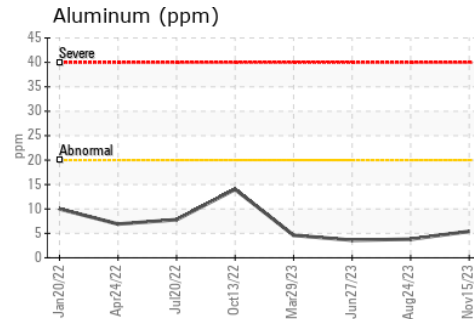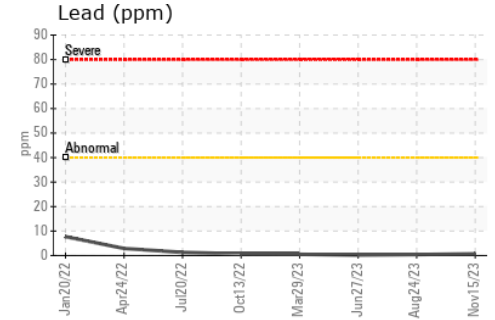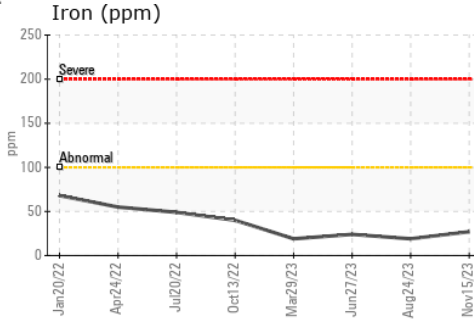

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 777 - Belleville-Municipal waste
Sample No. : GFL0093945 **Received** : 16 Nov 2023 197 Putman Industrial Road
Lab Number : 02596771 **Diagnosed** : 16 Nov 2023 Belleville, ON
Unique Number : 5681851 **Diagnostician** : Wes Davis CA K8N 4Z6
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Andrea Michael
 amichael@gflenv.com
 T: (613)962-7144
 F: (613)962-1994