OIL ANALYSIS REPORT

Sample Rating Trend

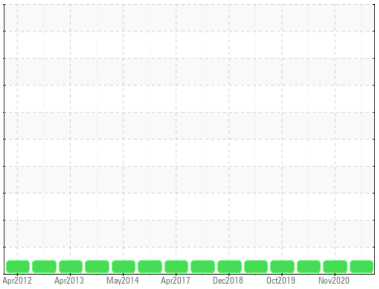

NORMAL

Machine Id
COMPRESSOR #2, PACKAGING NH3 (S/N G0627)
Component
Rotary Compressor
Fluid
TRIBOSPEC FRIGOSPEC ISO 68 (35 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PC0062601**	PC0035327	PC0022570
Sample Date		Client Info		**24 Oct 2023**	20 Nov 2020	07 Apr 2020
Machine Age	hrs	Client Info		**87138**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		**0**	0	7
Iron	ppm	ASTM D5185(m)	>70	**<1**	3	4
Chromium	ppm	ASTM D5185(m)	>10	**0**	0	0
Nickel	ppm	ASTM D5185(m)		**0**	0	<1
Titanium	ppm	ASTM D5185(m)		**0**	0	0
Silver	ppm	ASTM D5185(m)		**<1**	<1	0
Aluminum	ppm	ASTM D5185(m)	>3	**0**	<1	<1
Lead	ppm	ASTM D5185(m)	>4	**<1**	0	<1
Copper	ppm	ASTM D5185(m)	>20	**1**	1	2
Tin	ppm	ASTM D5185(m)	>3	**0**	0	0
Antimony	ppm	ASTM D5185(m)		**0**	<1	<1
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**<1**	<1	<1
Barium	ppm	ASTM D5185(m)		**<1**	0	<1
Molybdenum	ppm	ASTM D5185(m)		**0**	0	0
Manganese	ppm	ASTM D5185(m)		**0**	0	0
Magnesium	ppm	ASTM D5185(m)		**0**	0	<1
Calcium	ppm	ASTM D5185(m)		**2**	3	4
Phosphorus	ppm	ASTM D5185(m)		**0**	<1	0
Zinc	ppm	ASTM D5185(m)		**2**	2	2
Sulfur	ppm	ASTM D5185(m)		**215**	555	732
Lithium	ppm	ASTM D5185(m)		**<1**	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>45	**<1**	2	1
Sodium	ppm	ASTM D5185(m)		**<1**	<1	0
Potassium	ppm	ASTM D5185(m)	>20	**0**	0	<1
Water	%	ASTM D6304*	>0.6	**0.002**	0.001	0.001
ppm Water	ppm	ASTM D6304*		**24.2**	14.0	7.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		**0.01**	0.04	0.03

OIL ANALYSIS REPORT

Water (KF)

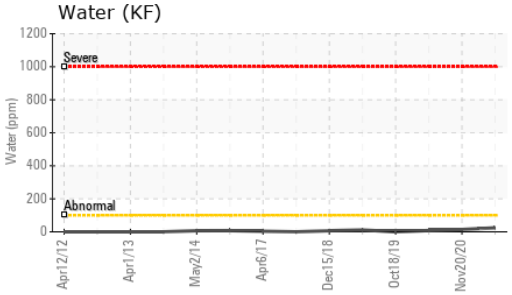

Viscosity @ 100°C

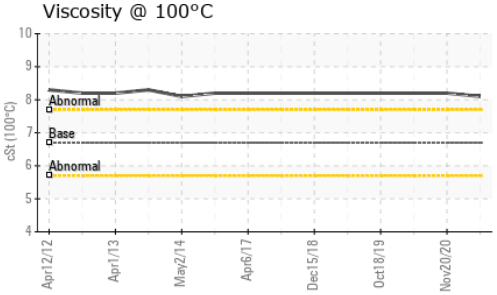

Viscosity @ 100°C

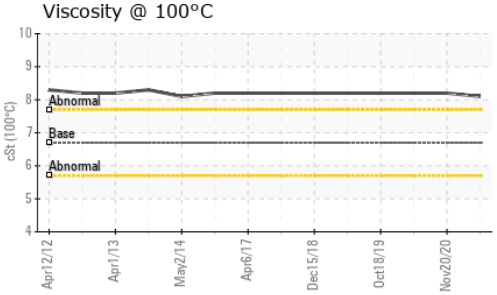

Viscosity @ 40°C

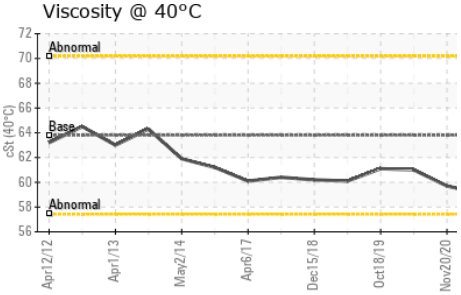

PQ

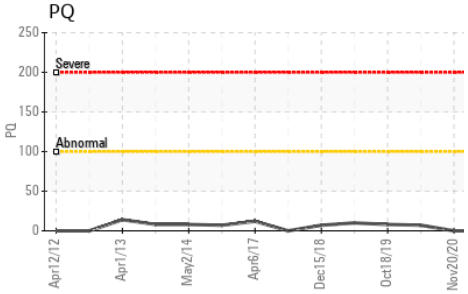

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**NONE**	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.6	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	63.8	**59.1**	59.7	61.0
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	**8.1**	8.2	8.2
Viscosity Index (VI)	Scale	ASTM D2270*		**104**	105	102

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

GRAPHS

Ferrous Alloys

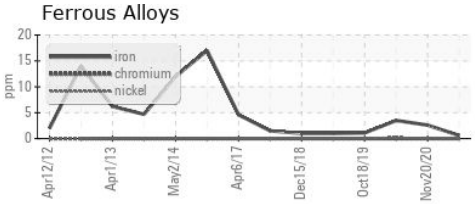

PQ

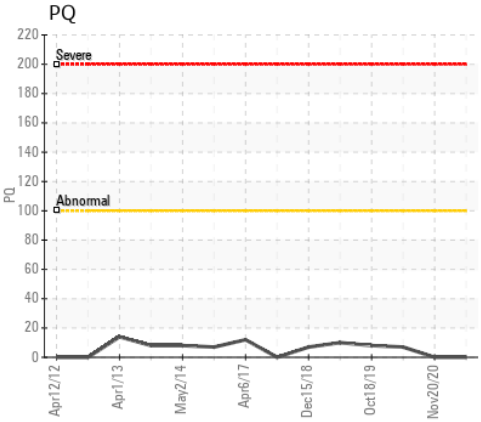

Non-ferrous Metals

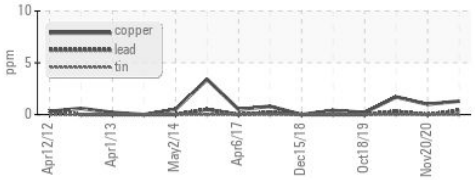

Viscosity @ 40°C

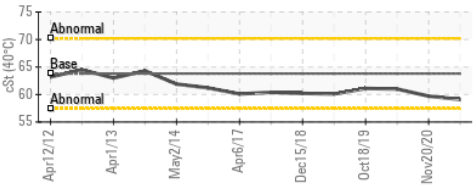

Acid Number

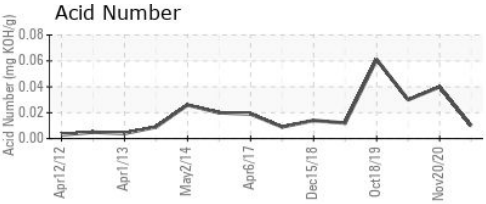

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0062601 **Received** : 16 Nov 2023
Lab Number : 02596845 **Diagnosed** : 17 Nov 2023
Unique Number : 5681925 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

SAPUTO FOODS LTD
284 HOPE STREET WEST
TAVISTOCK, ON
CA N0B 2R0
Contact: Joseph Ross
joseph.ross@saputo.com
T: (519)655-2337
F: (519)655-3449