




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**OR874**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

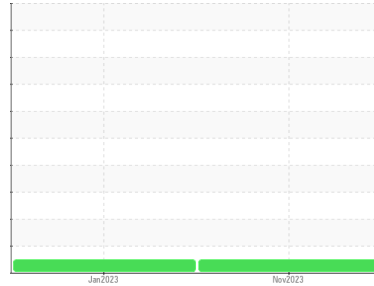

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0076993</b>	GFL0054605	---
Sample Date	Client Info		<b>10 Nov 2023</b>	24 Jan 2023	---
Machine Age	hrs	Client Info	<b>14385</b>	13773	---
Oil Age	hrs	Client Info	<b>612</b>	568	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>51	<b>26</b>	34	---
Chromium	ppm	ASTM D5185(m)	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<b>1</b>	1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>31	<b>2</b>	2	---
Lead	ppm	ASTM D5185(m)	>26	<b>2</b>	2	---
Copper	ppm	ASTM D5185(m)	>26	<b>2</b>	11	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>18</b>	13	---
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	60	<b>47</b>	60	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	1010	<b>700</b>	910	---
Calcium	ppm	ASTM D5185(m)	1070	<b>1556</b>	1254	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1039</b>	1113	---
Zinc	ppm	ASTM D5185(m)	1270	<b>1222</b>	1239	---
Sulfur	ppm	ASTM D5185(m)	2060	<b>2750</b>	2656	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>22	<b>3</b>	4	---
Sodium	ppm	ASTM D5185(m)	>31	<b>12</b>	9	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	3	---
Fuel	%	ASTM D7593*	>2.1	<b>1</b>	<1.0	---

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.5	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.0</b>	10.2	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>20.5</b>	21.8	---



# OIL ANALYSIS REPORT







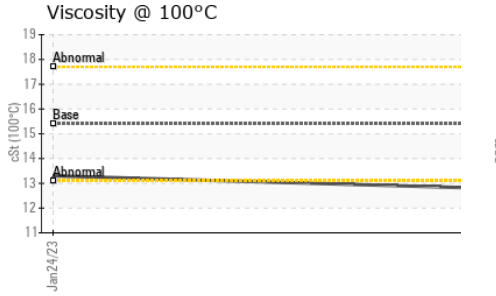
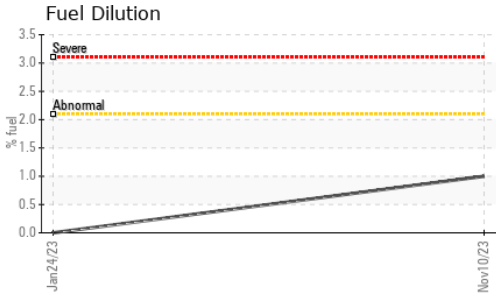


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>15.8</b>	17.4	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>12.8</b>	13.3	---

## GRAPHS

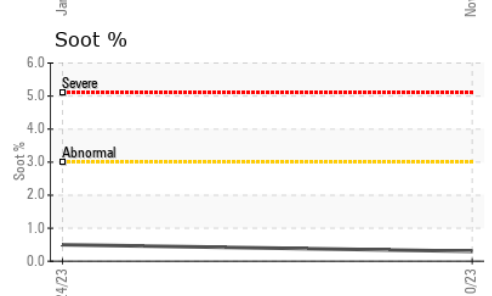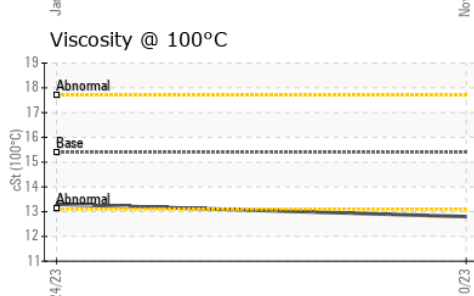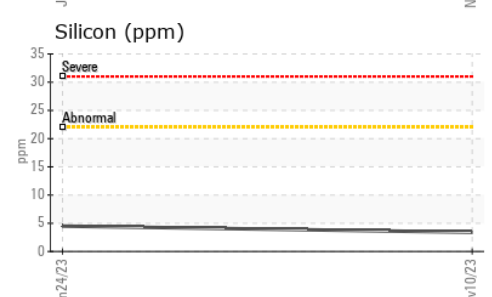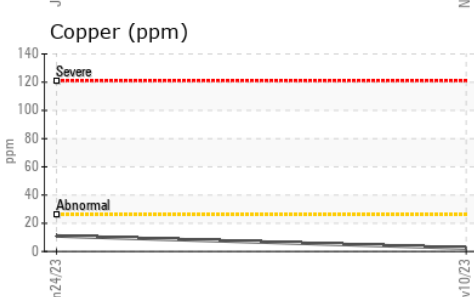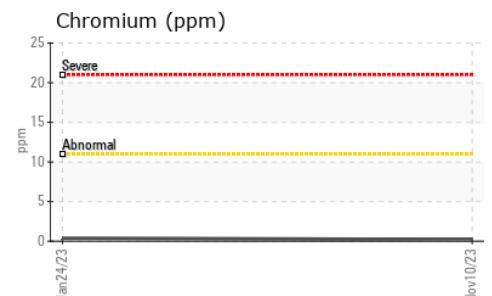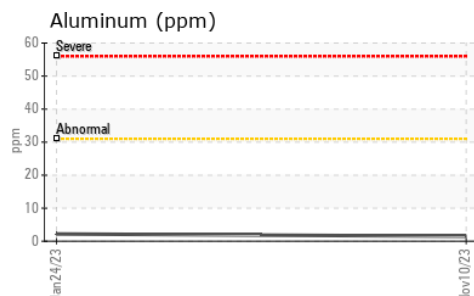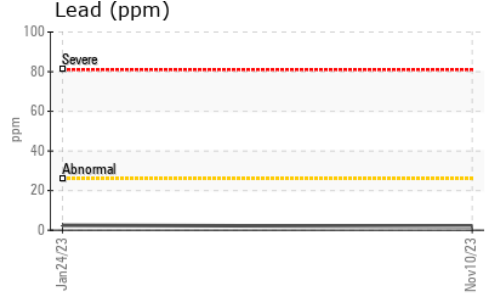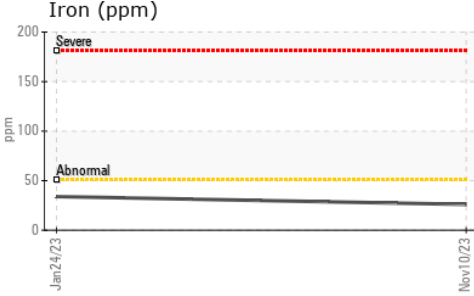

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 GFL Environmental - 575 - Squamish Hauling  
**Sample No.** : GFL0076993 **Received** : 20 Nov 2023 38950 Queens Way, Squamish, BC CA V8B 0K8  
**Lab Number** : **02597347** **Diagnosed** : 21 Nov 2023 Contact: Dean Imbeau dimbeau@gflenv.com  
**Unique Number** : 5682427 **Diagnostician** : Wes Davis T: (604)892-5604  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel ) F: (604)892-5238

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.