


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

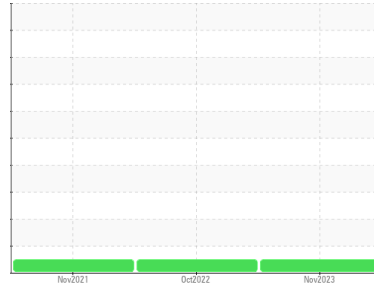

Machine Id

**S4**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0078206</b>	PC0054316	PC0050576
Sample Date	Client Info			<b>03 Nov 2023</b>	31 Oct 2022	29 Nov 2021
Machine Age	mls	Client Info		<b>13465</b>	12871	12075
Oil Age	mls	Client Info		<b>1000</b>	2000	2000
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>58</b>	179	150
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	4	3
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>8</b>	24	18
Lead	ppm	ASTM D5185(m)	>40	<b>1</b>	2	1
Copper	ppm	ASTM D5185(m)	>330	<b>9</b>	18	15
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	1	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>2</b>	3	3
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>58</b>	58	61
Manganese	ppm	ASTM D5185(m)		<b>0</b>	2	2
Magnesium	ppm	ASTM D5185(m)	450	<b>915</b>	795	854
Calcium	ppm	ASTM D5185(m)	3000	<b>1019</b>	1059	1066
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1001</b>	1089	1073
Zinc	ppm	ASTM D5185(m)	1350	<b>1142</b>	1140	1173
Sulfur	ppm	ASTM D5185(m)	4250	<b>2543</b>	2746	2680
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	10	8
Sodium	ppm	ASTM D5185(m)	>158	<b>4</b>	5	4
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.6	0.4
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.0</b>	9.2	7.7
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>18.1</b>	20.3	20.1

# OIL ANALYSIS REPORT







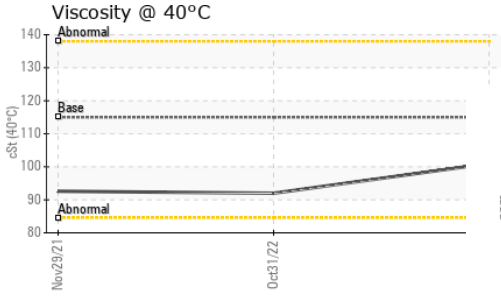
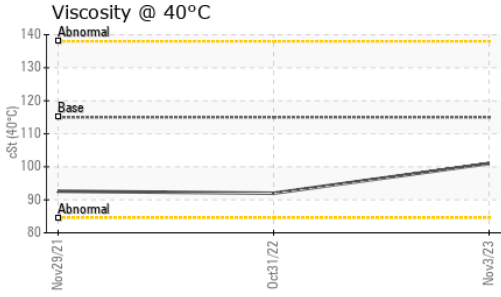


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>13.6</b>	14.9	14.3

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>101</b>	92.0	92.6
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.0</b>	12.9	13.0
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>140</b>	137	138

## GRAPHS

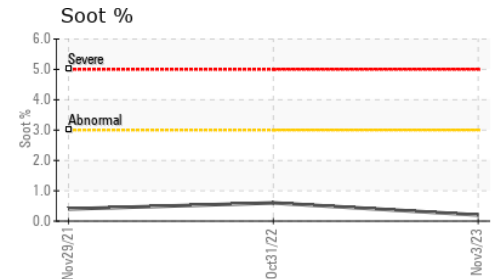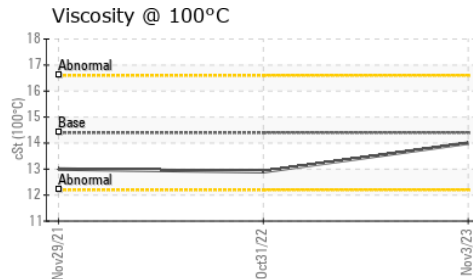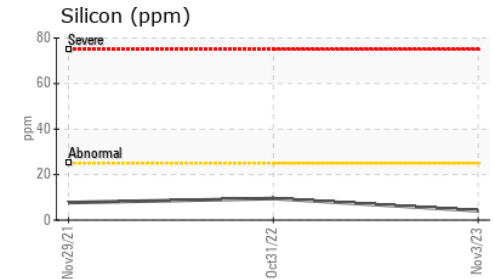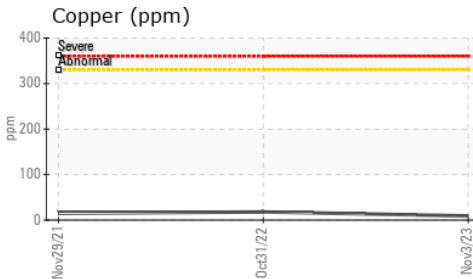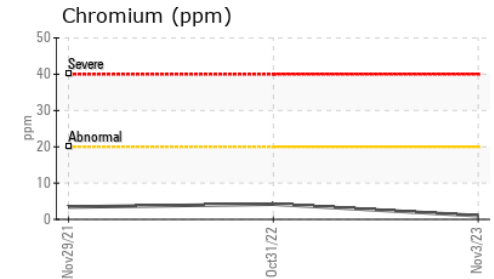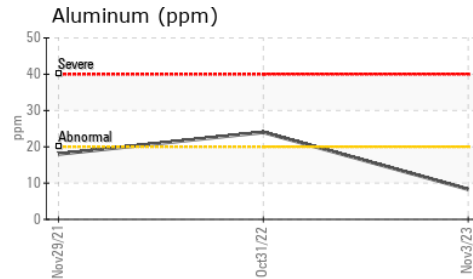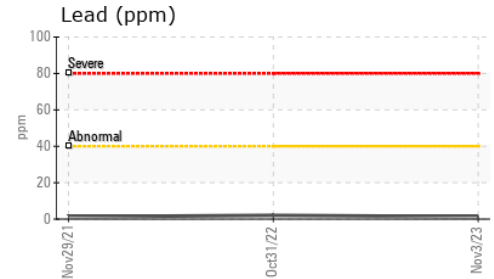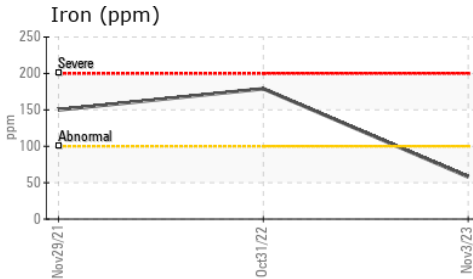

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0078206  
**Lab Number** : 02597432  
**Unique Number** : 5682512  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**HAMILTON FIRE DEPT**  
 MECHANICAL DIV., 177 BAY STREET NORTH  
 HAMILTON, ON  
 CA L8R 2P8  
 Contact: Jenny-Lynn Pellegrino  
 jenny-lynn.pellegrino@hamilton.ca  
 T: (905)546-2424  
 F: (905)961-9116

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*